## APPENDIX 7 Examples of details submitted as photographic evidences (England and Wales)


ADL §B7 (1) Foundations/substructure and ground floor, to show thermal continuity and quality of insulation in the following places.


Ref	Detail	No of photos*	What should be shown on the photo - examples		
1a	At ground floor perimeter edge insulation (Presence of insulation at the edge)	1 for detached 2 for other types	ADL1, B7, 1a. at ground floor perimeter edge insulation. Insulation under floor slab  ADL1, B7, 1a. at ground floor perimeter edge insulation. Insulation above floor slab		
1b	At external door threshold.	1 photo	slab or B&B		

Conventions approved: 22/12/2022 v.10.0 Incorporating amendment made 27/01/2023

Page 54 of 61

Commented [DF4]: Not applicable in Scotland

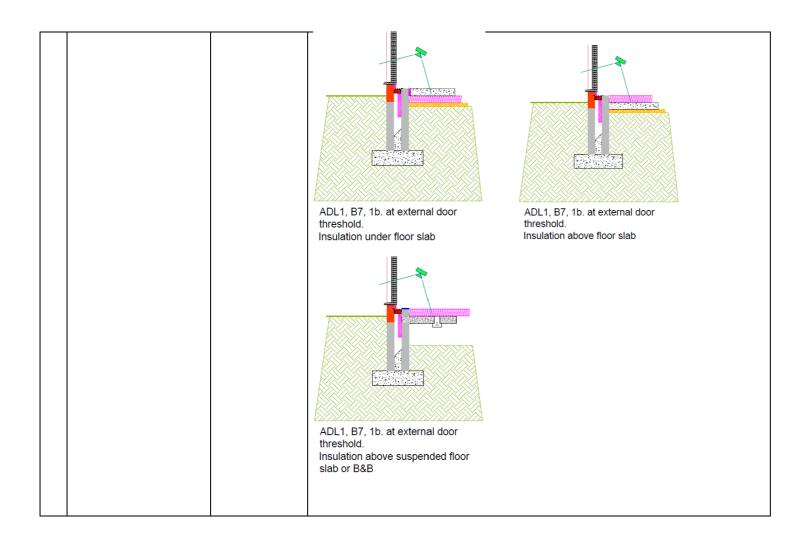

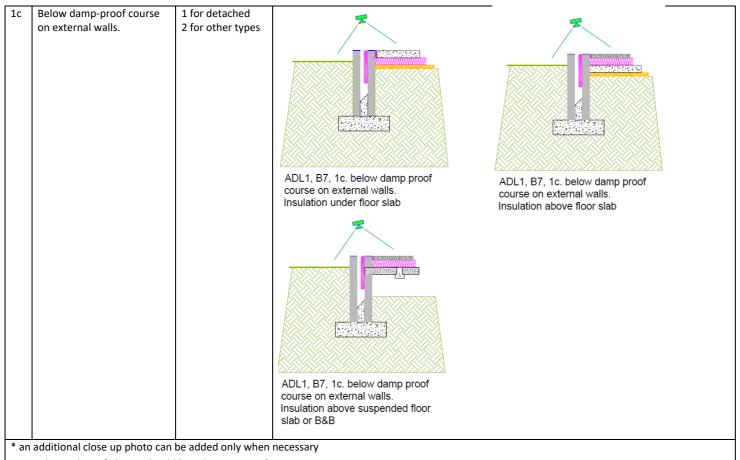


Note: The quality of photos should be subject to ADL §B7.

Note: Regarding "at external door threshold"; it could be a combination of E3 (sill) and E5 (ground floor) so what needs to be photographed, as if the door sits on top of the DPC (Damp Proof Course) then there is no E3.

ADL §B7 (2) External walls: for each main wall type, to show thermal continuity and quality of insulation for the following.

Ref	Detail	No of photos*	What should be shown on the photo	
2a	Ground floor to wall junction.	1 for detached 2 for other types	ADL1, B7, 2a. Ground floor to wall junction. Insulation under floor slab  ADL1, B7, 2a. Ground floor to wall junction. Insulation above floor slab	

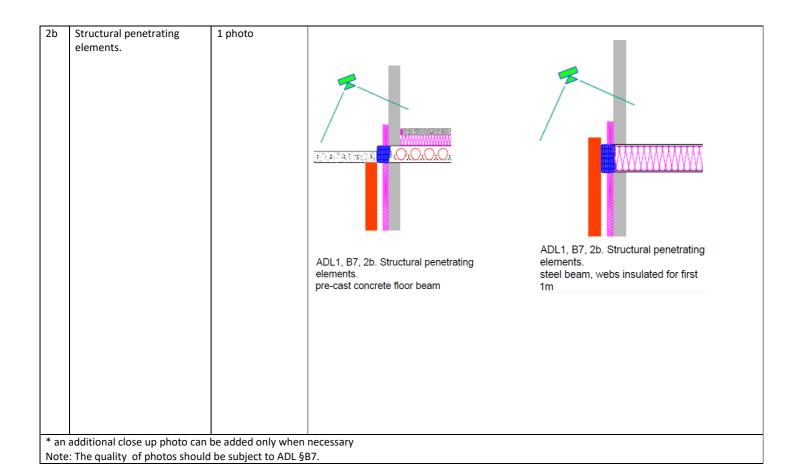

Conventions approved: 22/12/2022 v.10.0 Incorporating amendment made 27/01/2023

ADL §B7 (3) Roof: for each main roof type, to show thermal continuity and quality of insulation at the following.

Ref	Detail	No of photos*	What should be shown on the photo
3a	Joist/rafter level	1 for detached 2 for other types	
			ADL1, B7, 3a. Joist/rafter level. Insulation between and across and deeper between trusses
3b	Eaves and gable edges	1 photo	
			ADL1, B7, 3b. Eaves and gable edges.  ADL1, B7, 3b. Eaves and gable edges.

Conventions approved: 22/12/2022 v.10.0 Incorporating amendment made 27/01/2023

ADL §B7 (4) Openings: for each opening type (one image per wall or roof type is sufficient), to show thermal continuity and quality of insulation with photographs of the following.

Ref	Detail	No of photos*	What should be shown on the photo	
4a	Window positioning in relation to cavity closer or insulation line	1 for detached 2 for other types		ADL1, B7, 4a. Window positioning in relation to cavity closer or insulation line
4b	External dorset positioning in relation to cavity closer or insulation line	1 photo	ADL1, B7, 4b. External doorset positioning in relation to cavity closer or insulation line	

Note: The quality of photos should be subject to ADL §B7.

ADL §87 (5) Airtightness: additional photographs for all details 1–4 to show airtightness details (only if not included or visible in continuity of insulation image)

= 3 = 1 (0) = 11 = 13 = 13 = 13 = 13 = 13 = 13 = 1				
Ref	Detail	No of photos*	What should be shown on the photo	

5a	Joist/rafter level	1 photo	To be defined by the Builder		
* an additional close up photo can be added only when necessary					
Note: The quality of photos should be subject to ADL §B7.					

ADL §B7 (6) **Building services:** for all plant associated with space heating, hot water, ventilation and low or

zero carbon technology equipment within or on the building, show the following.

Ref	Detail	No of photos*	What should be shown on the photo
6a	Boiler (main heating)	1 photo	Boiler label, make, model and serial number
		2 if two systems	
6b	Primary pipework	1 photo	Photo to show that primary pipework is
		2 if two systems	insulated.
6c	Mechanical ventilation	1 photo	Presence of insulation outside the thermal
	ductwork		envelope; Diagram to be added
* on additional along up whate one he added anti-upon pagestons			

<sup>\*</sup> an additional close-up photo can be added only when necessary

Note: The quality of photos should be subject to ADL §B7.

When photographs are received, with the plot number and detail reference according to the numbers used in ADL §B7 and §B8, SAP Assessor uses them in addition to the documentary evidences required by the SAP Conventions.

The references of photos (e.g.P1/3b) are not for including into BREL Section 2b.

Photos with the plot number and detail reference according to the numbers used in ADL §B7 and §B8, are stored by SAP Assessor together with other documentary evidenced required for SAP Assessment.