


LST Shield

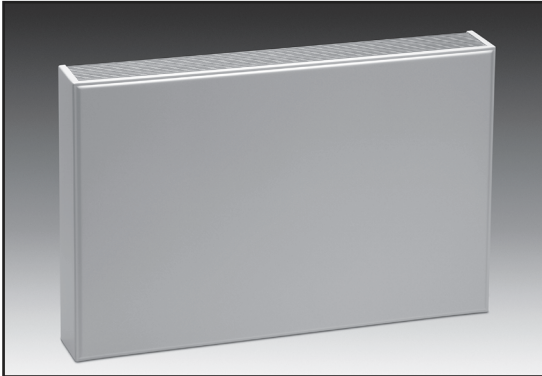

Features

- Aesthetically pleasing appearance
- Strong and durable with 2 mm steel casing
- Smooth, easy to clean surfaces
- Security fixing for tamper and vandal resistance
- Conceals and protects pipework and valves
- Widerange of outputs using different radiators
- Maximum flexibility with individual casing, multiple casings or wall-to-wall system
- Meets NHS Estates Health Guidance Note (March 1998)
- Built-in valve (remote sensor option)
- Bottom grill (option)

Type C:

Casing with top grille and open bottom for mounting above floor level.

Type FA:

Casing with solid top, top front grille and open bottom for mounting above floor level and under window sills.

Types C and FA can be equipped with bottom grilles to prevent access to radiator from below.

Type FB:


Casing with top grille, bottom front grille and open bottom for mounting at floor level.

Type FAB:

Casing with top and bottom front grilles and closed top for floor mounting under window sills.

Casings for use without radiators, such as in wall-to-wall systems, can be ordered, and are mounted on special wall brackets.

Height and length

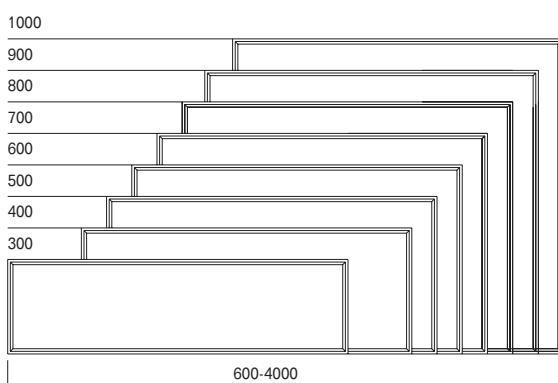

Profile

