



P5V/P5KV



P5V - single

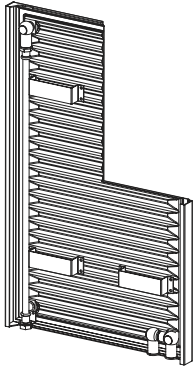


P5V cutaway without convector fins, rear view

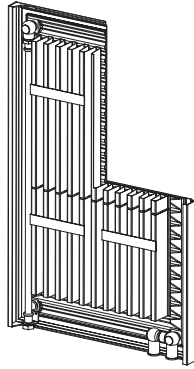


P5KV cutaway with convector fins, rear view

P5V - double

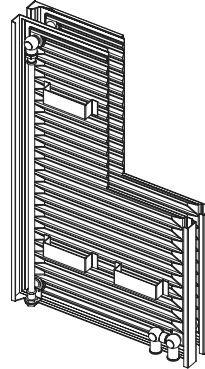


P5V-D cutaway without convector fins, rear view

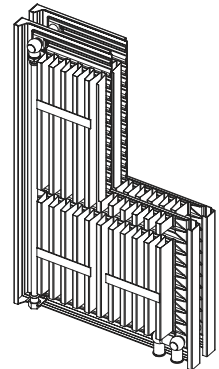


P5KV-D cutaway with convector fins, rear view

P5V - single and double


Height and length




Bracket BP10/30




Spacer for bracket




P5V, profile



P5KV, profile



P5V-D, profile





P5KV-D, profile



P5V - single and double with built-in valve

Built-in valve format 1



Built-in valve format 1:
Sensor head through front plate and 1/2" downward facing tappings

Other options, please contact Hudevad

Length	P5V/P5KV and P5V-D/P5KV-D: 300, 400, 500, 600, 700 and 1000 mm
Height	P5V/P5KV and P5V-D/P5KV-D: 800-2500 mm, with sections in increments of 33.33 mm Heights between 2500 and 4000 mm are available Radiators above 2500 mm are with open ends at top and bottom
Depth	P5V: 40 mm, P5KV: 58 mm P5V-D: 105 mm, P5KV-D: 123 mm
Tappings	1/2" standard, adapter for 3/8" and 3/4"

Mounting	Wall mounted Brackets are included Air vent is included
Colour	Powder coated in white RAL 9010 Option: Painted in other standard RAL and BS colours
Options	- Model UR-flex - Towel rails/towel pegs



Output - single

Output for radiator height 1000 mm

P5V Length mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	328	413	0.8	8.1
400	438	550	1.1	10.8
500	547	688	1.4	13.5
600	657	825	1.6	16.1
700	766	963	1.9	18.8
1000	1095	1375	2.7	26.9

P5KV Length mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	406	510	0.8	10.8
400	541	679	1.1	14.4
500	676	849	1.4	18.0
600	811	1019	1.6	21.6
700	947	1189	1.9	25.2
1000	1352	1699	2.7	36.0

Output - double


Output for radiator height 1000 mm

P5V-D Length mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	545	686	1.6	16.1
400	727	915	2.2	21.5
500	909	1144	2.7	26.9
600	1091	1372	3.2	32.3
700	1273	1601	3.8	37.7
1000	1818	2287	5.4	53.8


P5KV-D Length mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	731	923	1.6	21.6
400	975	1231	2.2	28.8
500	1218	1539	2.7	36.0
600	1462	1847	3.2	43.2
700	1706	2154	3.8	50.4
1000	2437	3078	5.4	72.0

Build-in dimensions - single

P5V, profile

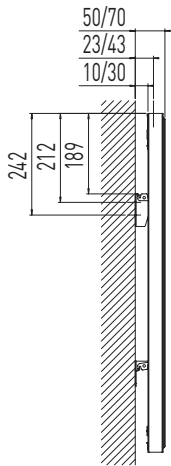


P5KV, profile

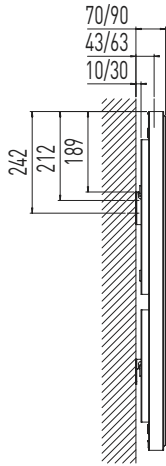


Build-in dimensions - double

P5V-D, profile

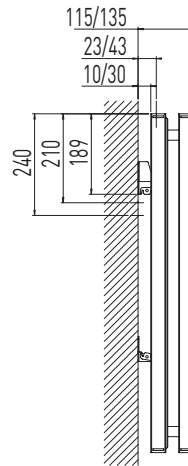

P5KV-D, profile

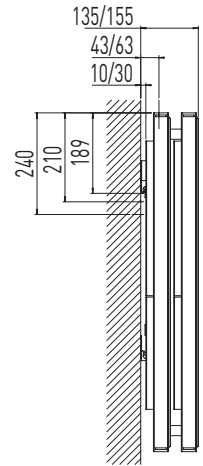

Tapping designation - single and double


G or Gp H or Hp



E or Ep F or Fp

Tapping designation, flow and return

Tapping designation - single and double with built-in valve

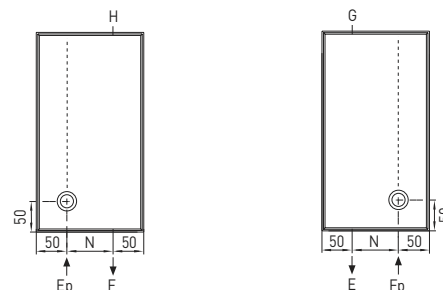

Built-in valve formats 1 and 3 can be delivered as follows:

- Downward facing tappings, 2E (left) or 2F (right)
- Downward facing tappings, EF
- Other options, please contact Hudevad