

Digital Migration Radio PD505LF

DMR standard radio, light design,
2 timeslots in DMO, cost effective.



Features

Small, Sleek, Light

The size is 115 X 54 X 27mm, dual-color injection, weight is 260g.

Long Battery Life

In digital mode, PD505LF operates at least 16 hours under a duty cycle of 5-5-90.

Rugged & Reliable

It is compliant with MIL-STD-810 C/D/E/F/G standards.

One Touch Call/Text

Supports One Touch features that comprise of Preprogrammed Text Messages, Voice Calls and Supplementary Features.

Supplementary Features (optional)

PD505LF can decode radio enable, radio disable, and remote monitor, as well as Priority Interrupt.

Dual Mode (Analog & Digital)

Dual modes (analog & digital) operation ensures a smooth analog to digital migration.

Secure Communication

Provides basic digital encryption and Scrambler feature in analog mode.

Advanced Signaling


Supports multiple advanced analog signaling modes, including HDC1200, 2-Tone and 5-Tone, providing better integration into existing analog radio fleets.

DMRA Data Service

The data protocol is fully compliant to DMRA standard.


Pseudo Trunk

This virtual trunking feature allocates a free timeslot for urgent communications. This effectively enhances frequency efficiency and allows you to communicate in a timely manner in emergency situations.

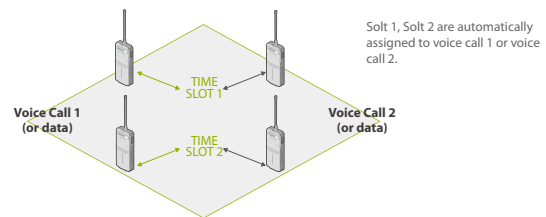

DMO True 2-Slot

In DMO Hytera can provide 2-slot communication, which allows for 2 talk paths on 1 frequency.

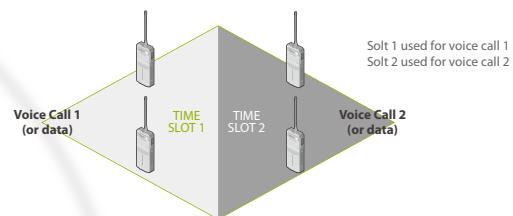

Highlights

- Ergonomic User-Friendly Design
- Light & Durable
- Compact Size & Clear Voice
- Affordable



Target Markets



Retail

Shopping Malls with high noise level require radios with good noise reduction.



Education

PD505LF has compact size for easy use that is capable of reaching long communication distance of a school or university campus.



Security

Enriched with several encryption types PD505LF will make your communication more private.



Warehouse

A durable battery allows for full shifts without the need to recharge.



Hotel

Heavy communication traffic require more effective use of frequency resources.



Rent

The rent function is necessary for rent industry.

Accessories

Versatile Accessories for Specific Tasks



Adapter PS1026

Strap RO03

BL2010 Li-ion Battery (2000mAh)

EHM15 D-earset with In-line Microphone

SM08M3 Remote Speaker Microphone

PC63 Data Cable (USB Port)

NCN011 Nylon Carrying Case (half-folded) (non-swivel) (black)

Pictures above are for reference only and may vary from actual products.

Specifications

General	
Frequency Range	446MHz
Channel Capacity	16
Zone Capacity	3
Channel Spacing	12.5KHz
Operating Voltage	7.4V
Battery	1500mAh (Li-Ion)
Battery Life (5/5/90)	Analog: about 11 Hours Digital: about 16 Hours
Weight	260g
Dimensions	115 x 54 x 27mm
Frequency Stability	±0.5ppm
Antenna Impedance	50Ω
Transmitter	
RF Power Output	0.5W
FM Modulation	11K0F3E
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm <1GHz, -30dBm >1GHz
Modulation Limiting	±2.5KHz
FM Hum & Noise	40dB
Adjacent Channel Power	60dB
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE++
Digital Protocol	ETSI-TS102 361-1,-2,-3

Receiver		
Sensitivity (Digital)		0.22μV / BER 5%
Sensitivity (Analog)		0.22μV (Typical) (12dB SIN AD) 0.4μV (20dB SIN AD) 0.22μV (12dB SIN AD)
Adjacent Selectivity	TIA-603 ETSI	60dB 60dB
Spurious Response Rejection	TIA-603 ETSI	70dB 70dB
Inter-modulation	TIA-603 ETSI	70dB 65dB
Hum & Noise		40dB
Rated Audio Power Output		0.5W
Rated Audio Distortion		≤3%
Audio Response		+1 ~ -3dB
Conducted Spurious Emission		<-57dBm
Environmental		
Operating Temperature		-30°C~ +60°C
Storage Temperature		-40°C~ +85°C
ESD		IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
Dustproof & Waterproof		IP54 Standard
Humidity		Per MIL-STD-810 C/D/E/F/G Standard
Shock & Vibration		Per MIL-STD-810 C/D/E/F/G Standard

All specifications are subject to change without notice due to continuous development.

Apex Radio Systems Ltd.
102 Tantobie Road
Denton Burn
Newcastle upon Tyne
NE15 7DQ

Tel 0191 228 0466
Fax 0191 228 0467
Email info@apexradio.com



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http://www.hytera.com Stock Code: 002583.SZ

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Co., Ltd.

© 2013 Hytera Communications Co., Ltd. All Rights Reserved.