

Applicable MIL-STD-810C/D/E/F

Applicable MIL-STD	810C Methods Procedures	810D Methods Procedures	810E Methods Procedures	810F Methods Procedures
Low Pressure	500.1 1	500.2 1,2	500.3 1,2	500.4 1
High Temperature	501.1 1,2	501.2 1,2	501.3 1,2	501.4 1,2
Low Temperature	502.1 1	502.2 1,2	502.3 1,2	502.4 1,2
Temp. Shock	503.1 1	503.2 1	503.3 1	503.4 1
Solar Radiation	505.1 1	505.2 1	505.3 1	505.4 1,2
Rain	506.1 2	506.2 2	506.3 1,2	506.4 1,2
Humidity	507.1 2	507.2 2,3	507.3 2,3	507.4 1
Salt Fog	509.1 1	509.2 1	509.3 1	509.4 1
Dust	510.1 1	510.2 1	510.3 1	510.4 1
Vibration	514.2 8,10	514.3 1	514.4 1	514.5 1
Shock	516.2 1,2,5	516.3 1,4	516.4 1,4	516.5 1,4

General

Frequency Range(MHz)	VHF: 136-174 UHF: 400-420 440-470 450-470 350-390
Channel Capacity	16
Channel Spacing(KHz)	25 /12.5
Operating Voltage(V)	7.4
Battery	1200mAh (Li-ion)
Battery Life (5-5-90 Duty Cycle)	More than 9 hours
1200mAh Li-Ion battery	More than 9 hours
1300mAh Ni-MH battery	More than 14 hours
2000mAh Li-Ion battery	
Frequency Stability(ppm)	± 2.5
Operating Temperature(°C)	-20~+50
Antenna Impedance(Ω)	50
Dimensions (H×W×D)(with battery, without antenna)(mm)	119×55×33
Weight (with antenna & battery)(g)	270g (TC-610) 275g (TC-610P)

Transmitter

RF Power Output	5W/2W(VHF) 5W/2W(UHF)
Modulation	F3E
Spurious and Harmonics	-36dBm<1GHz -30dBm>1GHz
FM Noise	40/35dB
Audio Distortion	≤5%

All Specifications are tested according to TIA/EIA-603, and subject to change without notice due to continuous development.

Receiver

Sensitivity	0.25/0.28 μV
Selectivity	70/60dB
Intermodulation	≥65dB
Spurious Response Rejection	≥70dB
S/N	45/40dB
Rated Audio Power Output	800mW
Rated Audio Distortion	≤5%

HYT
Two-way Radio

TC-610/610P

Cost Effective
Professional Radio



- Dust/Water Protection Class IP66
- Powerful Audio and Wide Communication Range
- LED Battery Gauge
- The Patent Structural Design

www.hytera.com

Hytera Communications Corporation Limited



Hytera
Respond & Achieve

Hytera Communications Corporation Limited

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057
Http: //www.hytera.com

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2011 Hytera Co., Ltd. All Rights Reserved.

Your Local Dealer

Apex Radio Systems Ltd.
102 Tantobie Road
Denton Burn
Newcastle upon Tyne
NE15 7DQ

Tel 0191 228 0466
Fax 0191 228 0467
Email info@apexradio.com



EN0120002A

A Rugged Radio for Harsh Environments

HYT TC-610P with pin-touched connection interface are IP66-excellent dust-tight and protected against powerful water jets.

Harsh, noisy and dusty working conditions in mega-project and construction sites may lower your efficiency and productivity by smudging the radio or shadowing the talk. HYT TC-610P portable radios are the option customized for users in these industries. Thanks to their robust construction and the IP66 protection they can withstand even the harshest conditions.

TC-610/610P

Professional Two-way Radio

Super Features

Dust/Water Protection Class IP66

In harsh, noisy, dusty and wet working conditions such as construction sites, generally your radio is apt to be smudged. But the TC-610P series will bring you reliable communication and high productivity in these working conditions, and the IP66-excellent protection with pin-touched connection interface allows you to wash off mud and dust on your radio. Other radios with poor waterproof performance may not work after you expose them to water.

Double Injection Molding

The TC-610P series employ double injection molding, which is a technique with high difficulty coefficient and high risk. Owing to this superior technique, the radio is comfortable to handle, rugged and durable.

Powerful Audio and Wide Communication Range

A powerful speaker with a diameter of 45mm (36mm for speakers of common radios) ensures superb clear, crisp sound, even in noisy environments. High transmit power (5W for UHF frequency band) accommodates wide communication coverage.


LED Battery Gauge

Non-display radios generally have no battery power indicator. The TC-610P series allow you to simply press one button to illuminate the tri-color LED battery gauge, which indicates battery strength levels for more effective power management.

Proprietary Structural Design

The battery latch structure of TC-610P series radios is another patent owned by HYT. It delivers secure connection between the battery and the radio, as well as simple operation.

The IP Code is a designation that indicates the level or amount of protection. The IP Code designation consists of the letters IP (International Protection) followed by two numerals – example:

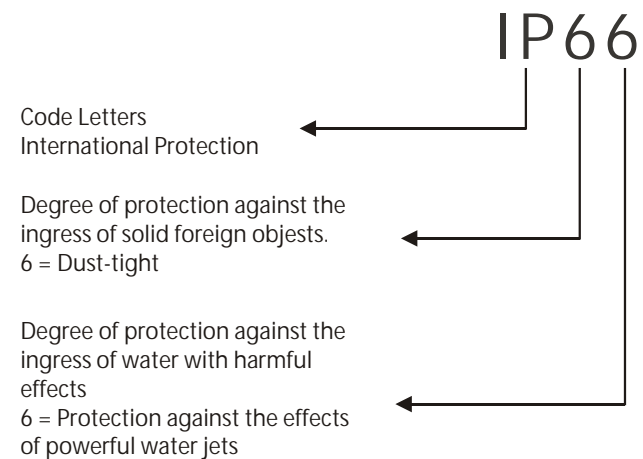

• IP66 water protection ensures the radio to be protected against a water jet for one minute. The diameter of the water jet is 40 mm.

Main Features

High/Low Power Switchable

By simple pressing one button, users can switch to low power when communicating within limited range coverage or switch to high power when further distance is required. High transmit power optimizes range coverage while low transmit power conserves battery consumption, all at the user's control.

Programmable 12.5kHz/25kHz Channel Spacing

The feature enables flexibility and easy migration of channel spacing requirements when the need arises, with no need to buy new radios.

Monitor

Allows users to monitor the activity on the current channel. The feature is especially helpful for receiving a weak signal.

Battery Save

The Battery Save feature is automatically activated once no activity on the channel and no operation performed, for extended operation time.

Low Battery Alert

Alert users to recharge the battery should the battery level run low.

TX Admit

Prevent users from "talking over" each other by restricting the user from transmitting if activity is detected on the channel.

Time-out Timer

The feature allows for more efficient use of channels by limiting the amount of time of each transmission.

PC Programmable

You are able to customize the features of each radio for each user.

Wired Clone

Easily copy the features of one radio to another.

CTCSS/CDCSS

Set up workgroups/users with unique CTCSS/CTCSS to prevent unwanted conversations on the same frequency.

Selectable Squelch Level (1-9)

Helps minimize interference from undesired weak signals and helps weak signals be heard.

Channel Scan

The channel scan feature enables the radio to continuously scan each channel in the scan list for activity. Simply press a side function button to activate scanning. When activity is detected on a channel the scan process will stop and you will hear the transmission.



Voice Operated Transmit (VOX)

Enjoy the convenience of hands-free operation when used with optional accessories.

2-Tone Decode (for TC-610P optional)

Allows you to receive Select Call, Alert Call, and Alert Call w/Voice.

HDC1200 PTT ID (for TC-610P optional)

Enables the transmission of caller ID and allows user to identify incoming callers.

ATIS

ATIS is an automatic identification device compliant with special technology regulations. This feature may be enabled by your dealer for specific areas.

DOS (Data Operated Squelch)

Helps to eliminate noise that occurred at the receiver.

IMPORTANT

1. TC-610/610P series are NOT submersible! Never immerse the radio in water.
2. KEEP the radio's accessory jack cover attached when the speaker-microphone is not in use. Water may get into the radio when the cover is not attached.

Recommended Applications

- Construction sites
- Stocking
- Hotel
- Property management
- Ports

Accessories

Standard Accessories	Li-Ion Battery (1200mAh) BL1204 MCU Rapid-rate Charger (for Li-Ion/Ni-MH Batteries) MCA02	Switching Power (Varies from different countries and areas) CH10A03	Antenna Strap R003
----------------------	--	--	-----------------------

Optional Accessories

<p>MCU Multi-unit Rapid-rate Charger (for Li-Ion/Ni-MH Batteries) MCA02</p>	<p>Li-Ion Battery (2000mAh) BL2001 Ni-MH Battery (1300mAh) BH1303</p>	<p>Six-unit Switching Power PS7001 Vehicle Adapter CHV09</p>	<p>Universal Nylon Chest Pack (Black) LCBN13 Leather Carrying Case (non-swivel) LCBN56</p>
---	---	--	--

Audio Accessories

<p>Earbud with in-Line PTT ESN05(TC-610P) / ESM11 (TC-610) Earbud with on-MIC PTT ESN06 / ESM12(TC-610)</p>	<p>Behind-the-Head, Noise-Canceling Headset ECN09 (TC-610P) / ECM14(TC-610) Heavy Weight, Noise-Canceling Headset ECN08(TC-610P) / ECM13(TC-610)</p>	<p>Light-weight, Single-muff Headset ECN07(TC-610P) / ECM12(TC-610) Light-weight, Behind-the-head Earpiece ECN06(TC-610P) / ECM11(TC-610)</p>	<p>Earpiece with on-MIC PTT & Transparent Acoustic Tube EAN04(TC-610P) / EAM12(TC-610) 2-Wire Surveillance Earpiece with Transparent Acoustic Tube (black) EAN07(TC-610P) / EAM13(TC-610) 3-Wire Surveillance Earpiece with Transparent Acoustic Tube EAN02(TC-610Pblack) / EAN04(TC-610Pbeige) / EAM16(TC-610.black) / EAM15(TC-610.beige) 2-Wire Earpiece with Wireless Receiver and Neck Loop EWN03(TC-610P) / EWM03(TC-610)</p>
<p>Light Weight, Throat-Vibrating Earpiece ELN02(TC-610P) / ELM01(TC-610) Ear Canal Bone Induction Earpiece EBN01(TC-610P) / EBM01(TC-610)</p>	<p>Remote Speaker Microphone SM08N1(TC-610P) / SM08M3(TC-610) Receive-only Earbud (for use with remote speaker microphone) ESS07 Receive-only Earpiece with Transparent Acoustic Tube (for use with remote speaker microphone) ESS08</p>	<p>Noise-Canceling Remote Speaker Microphone (P56) SM13N5 (TC-610P) / SM13M1(TC-610) Noise-Canceling Remote Speaker Microphone (Antenna Applicable) SM13M4(TC-610P) / SM13M2(TC-610)</p>	<p>D-earset with Boom Microphone EHN08(TC-610P) / EHM16(TC-610) D-earset with in-line Microphone EHN07 / EHM15(TC-610)</p>

Programming Cable (COM port) PC18(TC-610P) / PC19(TC-610)
 Programming Cable (USB to Serial Port) PC25(TC-610P) / PC26 (TC-610)