

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



Electrical Characteristics

Dual Sensing Temperature Series

Part No.	Size (EIA)	Zero Power Resistance at 25°C (Ω)	Sensing Temperature 1 at 4.7 KΩ (°C)	Sensing Temperature 2 at 47 KΩ (°C)	Max. Voltage (V)	Operating Temperature Range(°C)
		R25	Ts1	Ts2	V _{dc}	T _L ~T _U
TPM0S541P115RT	0402	540	115±5	135±7	32	-25~+150
TPM1S471P065RT	0603	470	65±5	80±7	32	-25~+90

Part No.	Size (EIA)	Zero Power Resistance at 25°C (Ω)	Sensing Temperature 1 at 10 KΩ (°C)	Sensing Temperature 2 at 100 KΩ (°C)	Max. Voltage (V)	Operating Temperature Range(°C)
		R25	Ts1	Ts2	V _{dc}	T _L ~T _U
TPM0S102P115RT	0402	1000	115±5	130±3	32	-40~+140
TPM0S102P125RT			125±5	140±3		-40~+150

Single Sensing Temperature Series

Part No.	Size (EIA)	Sensing Temperature (℃)	Resistance (Ω)			Max. Voltage (V)	Operating Temperature Range(℃)	Safety Approvals	
		Ts	25℃	Ts - 5℃	Ts + 5℃	V _{dc}	T _L ~T _U	UL/ cUL	TUV
TPM0S471P105R	0402	105±5	470	≤4.7K	≥4.7K	32	-25~+120	√	√
TPM0S471P115R		115±5					-25~+130	√	√
TPM0S471P125R		125±5					-25~+140	√	√
TPM0S103P130R		130±5	10K	≤4.7M	≥4.7M		-25~+145		
TPM1S101N130R	0603	130±7	100	≤1K	≥1K	24	-25~+145		
TPM1S221N105R		105±7	220	≤2.2K	≥2.2K		-25~+120		
TPM1S471P065R		65±5	470	≤4.7K	≥4.7K	32	-25~+80	√	√
TPM1S471P075R		75±5					-25~+90	√	√
TPM1S471P085R		85±5					-25~+100	√	√
TPM1S471P095R		95±5					-25~+110	√	√
TPM1S471P105R		105±5					-25~+120	√	√
TPM1S471P115R		115±5					-25~+130	√	√
TPM1S471P125R		125±5					-25~+140	√	√
TPM1S471P135R		135±5					-25~+150	√	√
TPM1S472P105R		105±5	4.7K	≤47K	≥47K		-25~+120		
TPM1S103P110R		110±5	10K	≤4.7M	≥4.7M		-25~+125	√	√
TPM1S103P120R		120±5					-25~+135	√	√
TPM1S103P130R		130±5					-25~+145	√	√
TPM1S473P130R		130±5					47K	≤4.7M	≥4.7M

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing




Part No.	Size (EIA)	Sensing Temperature (°C)	Resistance (Ω)			Max. Voltage (V)	Operating Temperature Range(°C)	Safety Approvals	
		Ts	25°C	Ts - 5°C	Ts + 5°C	V _{dc}	T _L ~T _U	UL/ cUL	TUV
TPM2S101N110R	0805	110±7	100	≤1K	≥1K	24	-25~+125		
TPM2S101N115R		115±7					-25~+130		
TPM2S101N130R		130±7					-25~+145		
TPM2S471P065R		65±5	470	≤4.7K	≥4.7K	32	-25~+80	√	√
TPM2S471P075R		75±5					-25~+90	√	√
TPM2S471P085R		85±5					-25~+100	√	√
TPM2S471P095R		95±5					-25~+110	√	√
TPM2S471P105R		105±5					-25~+120	√	√
TPM2S471P115R		115±5					-25~+130	√	√
TPM2S471P125R		125±5					-25~+140	√	√
TPM2S471P135R		135±5					-25~+150	√	√
TPM2S103P130R		130±5	10K	≤4.7M	≥4.7M		-25~+145		

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing





■ Resistance-Temperature Characteristics (Typical) Dual Sensing Temperature Series

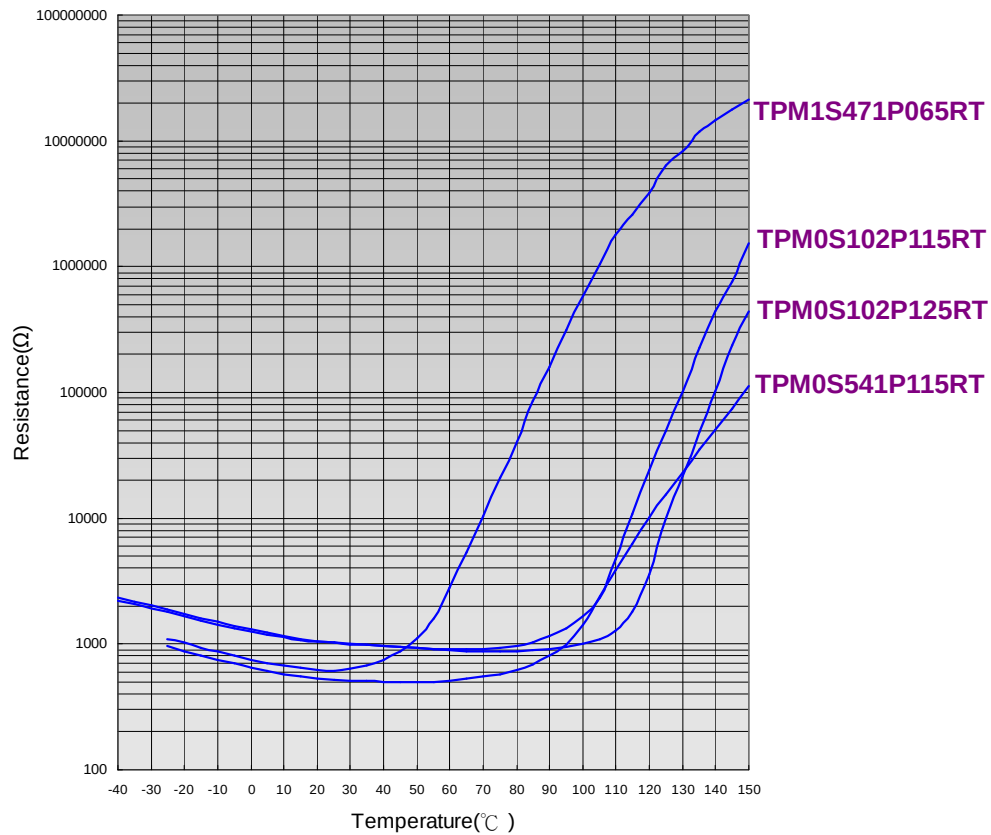

Single Sensing Temperature Series

● 0402 Series



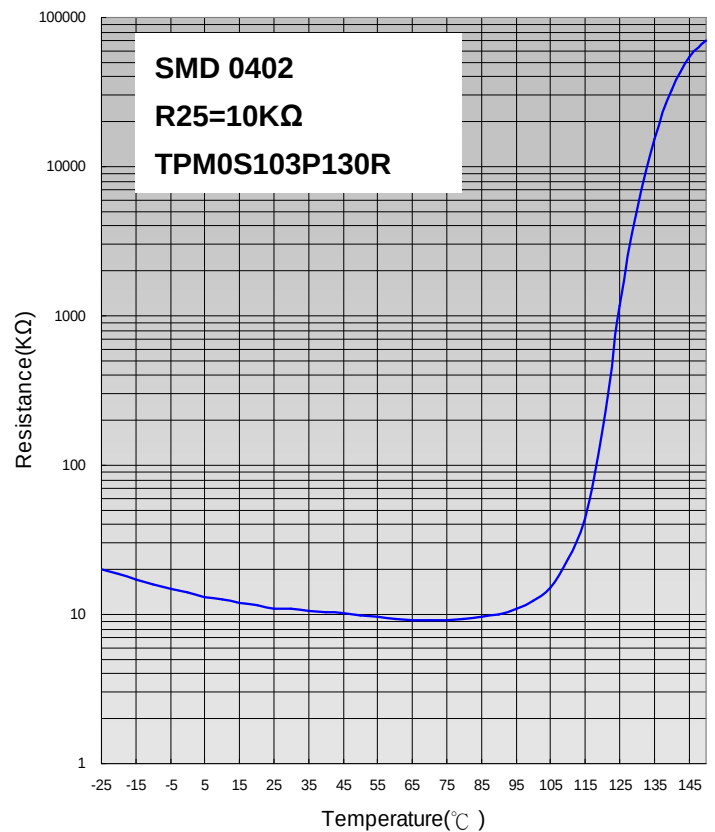
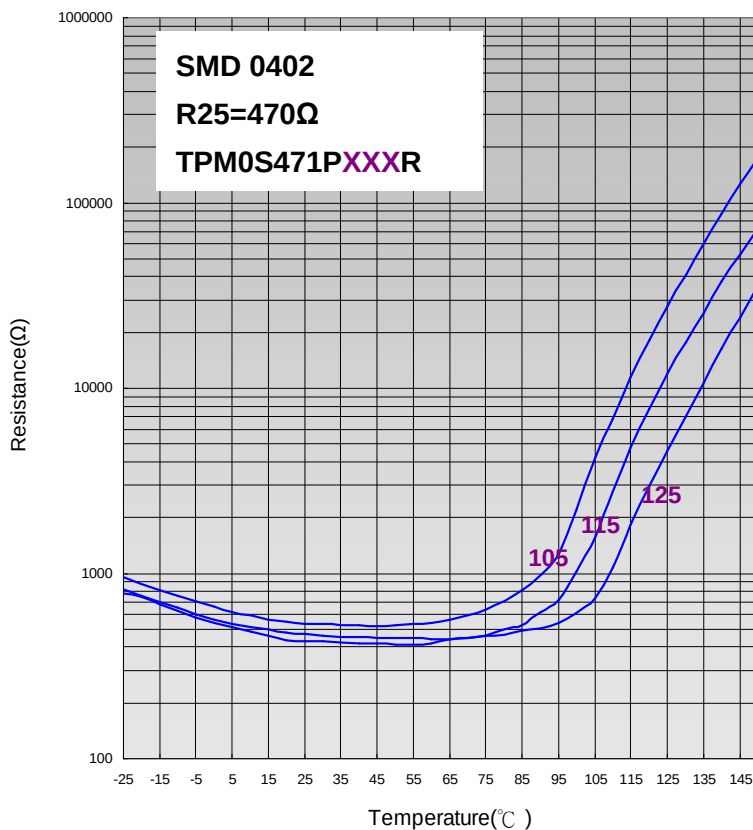


PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



● 0603 Series

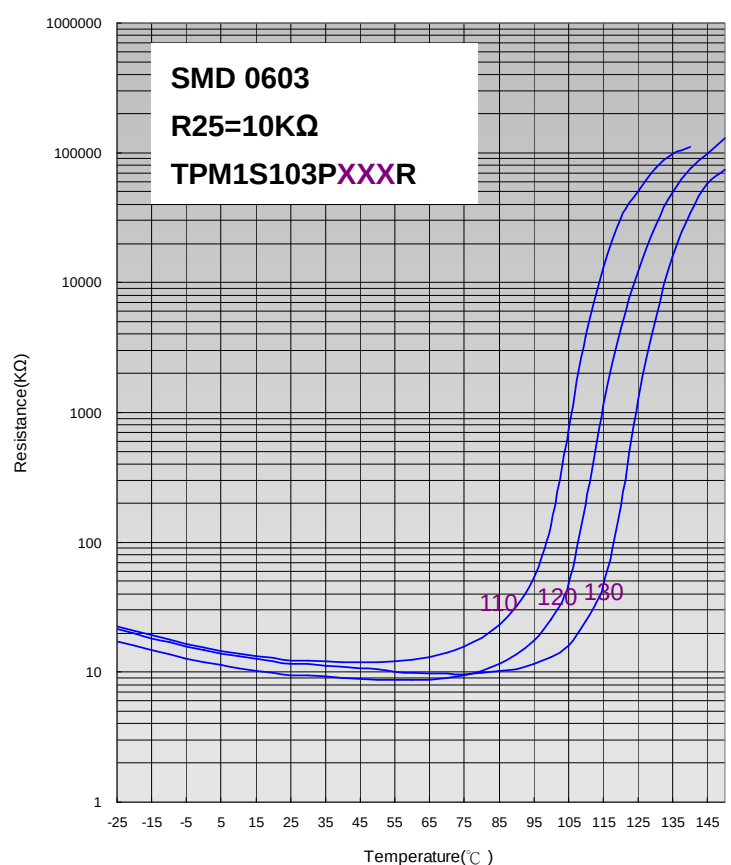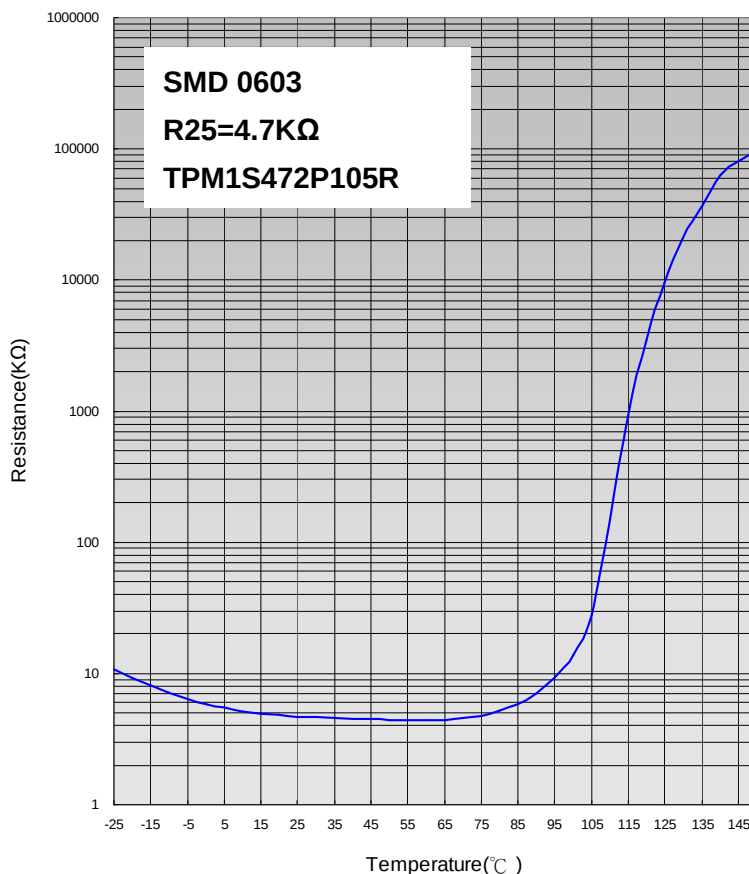
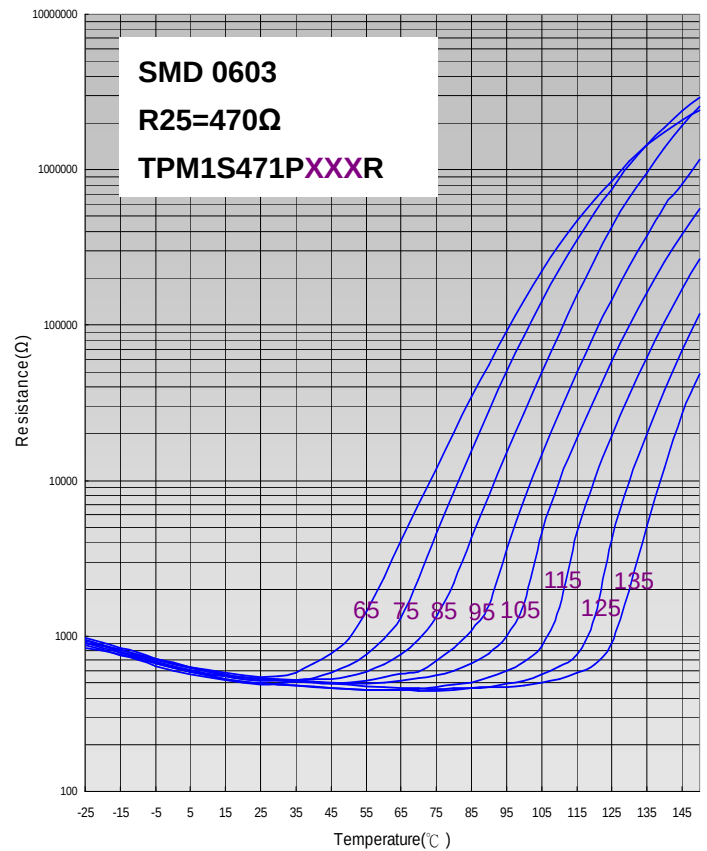
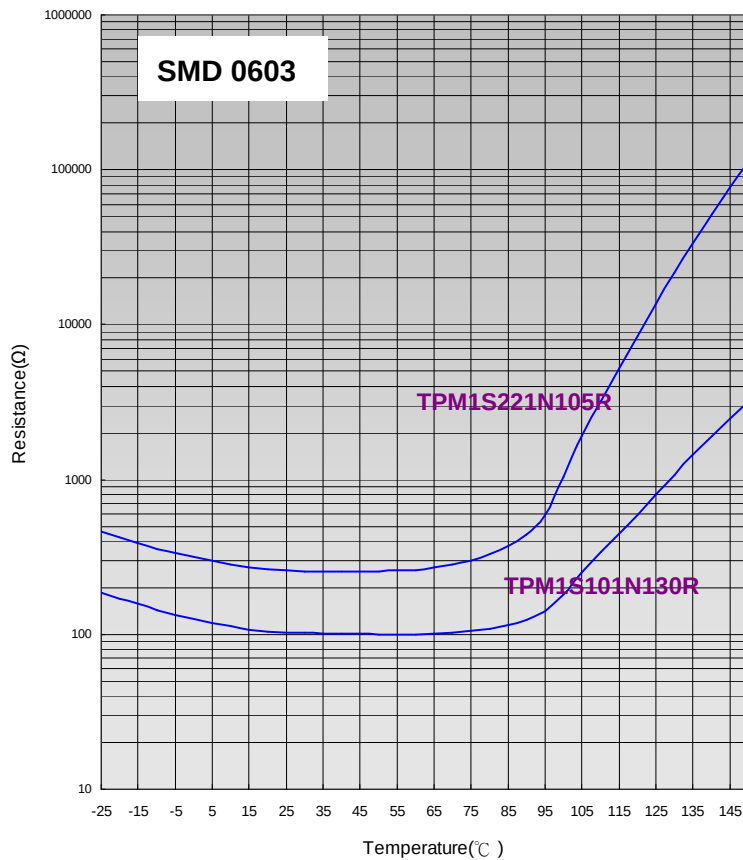


PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



● 0805 Series

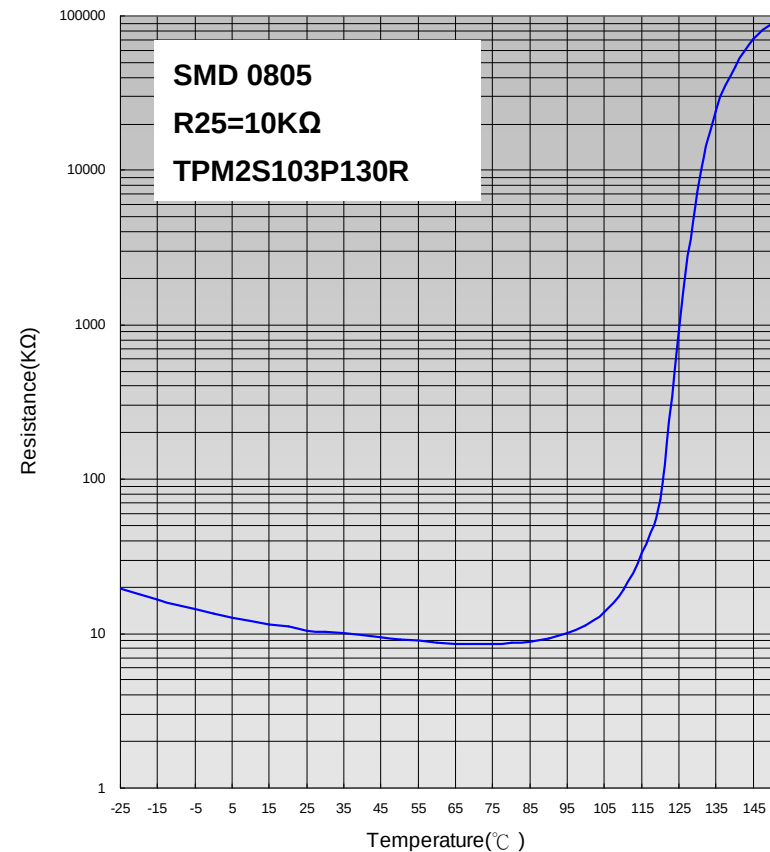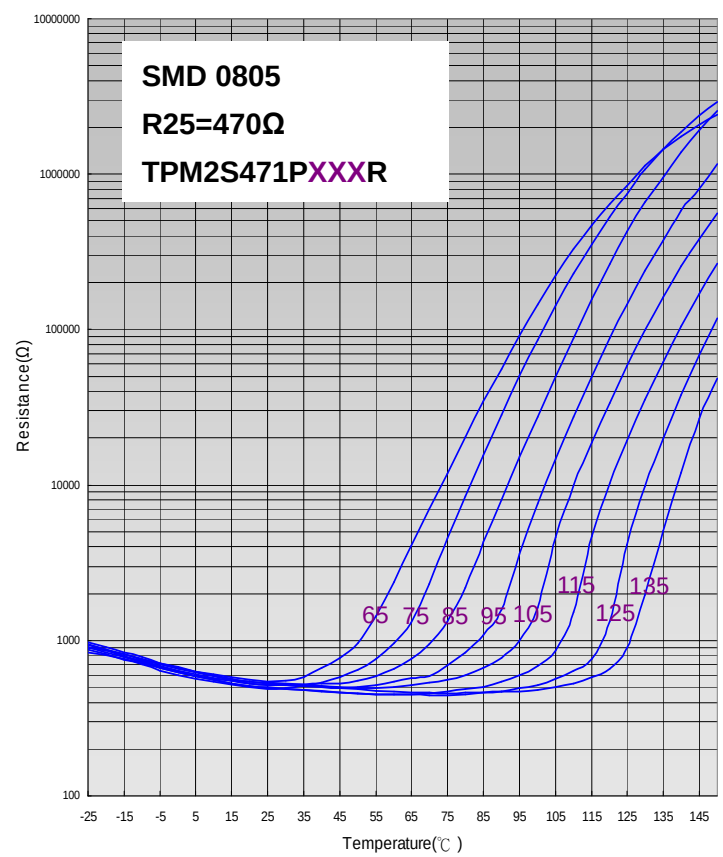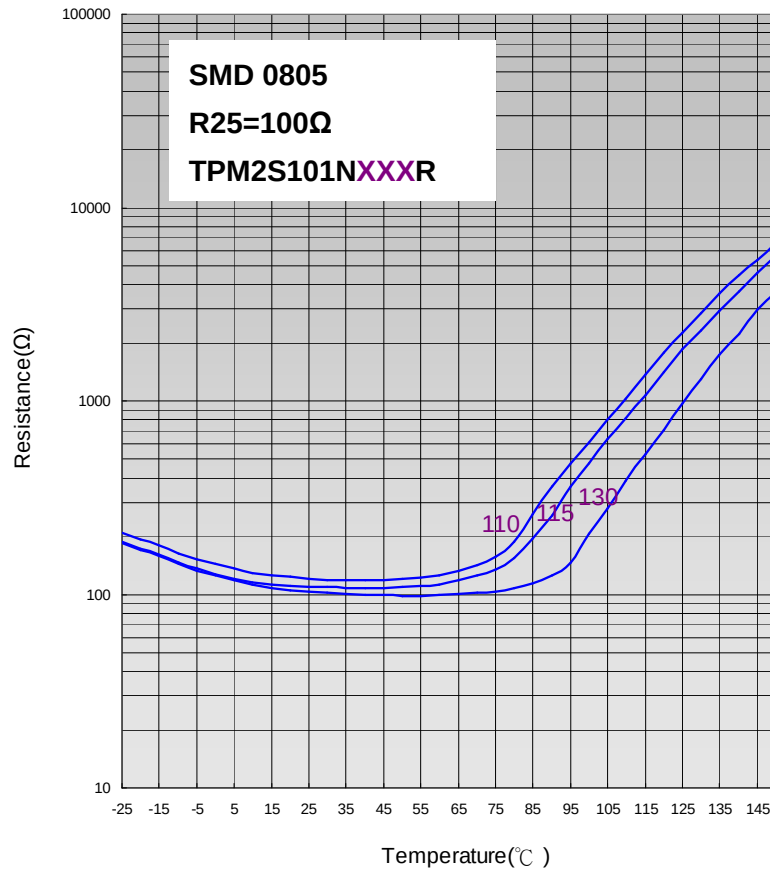

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Typical Application Circuit

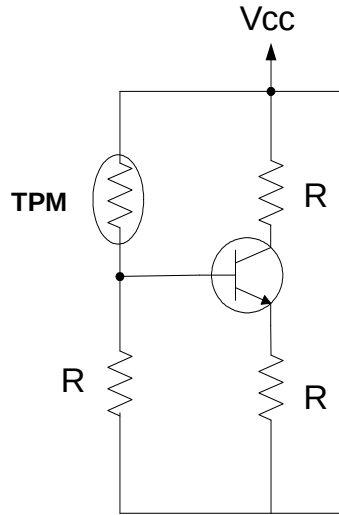


Fig 1. Overheat Protection

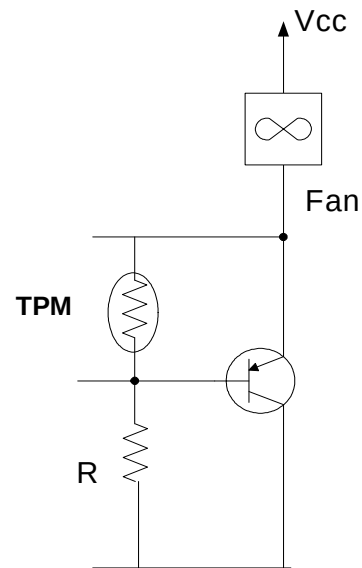


Fig 2. Temp. Sensing and Control

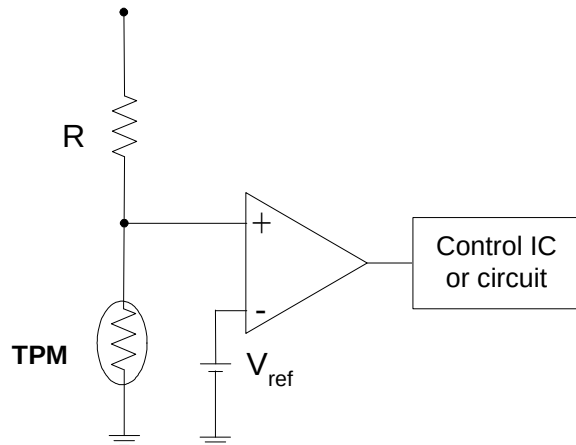


Fig 3. Comparator Circuit


PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Soldering Recommendation

● IR-Reflow Soldering Profile

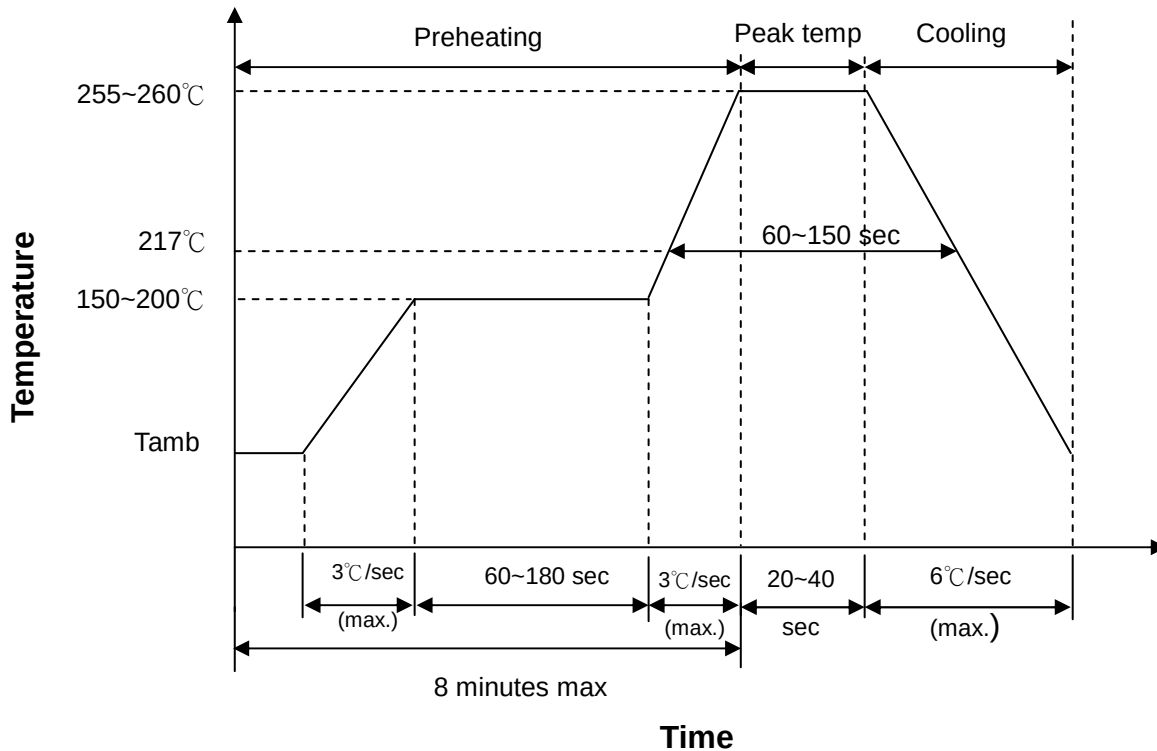

● Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	360°C (max.)
Soldering Time	3 sec (max.)
Diameter of Soldering Iron-tip	Φ3mm (max.)


Caution: Please do not touch the component surface with soldering iron directly to avoid its damage.

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing



■ Recommended Pad Dimensions

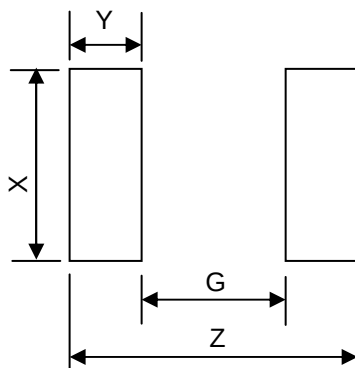

Size	Z (mm)	G (mm)	X (mm)	Y (mm)
0402	1.7	0.5	0.6	0.6
0603	3.0	1.0	1.0	1.0
0805	3.4	1.0	1.4	1.2

■ Reliability

Item	Standard	Test Conditions / Methods	Specifications															
Bending Strength	IEC-60068-2-21	Warp 2mm Speed < 0.5mm/sec. Duration: 10 sec on PCB. 	No visible damage ΔR ₂₅ /R ₂₅ ≤ 10 %															
Damp Heat, Steady State	IEC 60068-2-3	40 ± 2 °C , 90 ~ 95% RH , 1000± 24 HRS	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 % (ΔR ₂₅ /R ₂₅ ≤ 30 % ^{*1)}															
High Temp. Storage	IEC 60738-1 IEC 60068-2-2	Tu. ± 5 °C , 1000 ± 24 HRS	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 % (ΔR ₂₅ /R ₂₅ ≤ 30 % ^{*1)}															
Rapid Change of Temperature	IEC 60068-2-14	The conditions shown below shall be repeated 5 cycles on PCB <table><tr><th>Step</th><th>Temperature (°C)</th><th>Period (minutes)</th></tr><tr><td>1</td><td>-25 ± 5</td><td>30 ± 3</td></tr><tr><td>2</td><td>Room temperature</td><td>5 ± 3</td></tr><tr><td>3</td><td>150 ± 5</td><td>30 ± 3</td></tr><tr><td>4</td><td>Room temperature</td><td>5 ± 3</td></tr></table>	Step	Temperature (°C)	Period (minutes)	1	-25 ± 5	30 ± 3	2	Room temperature	5 ± 3	3	150 ± 5	30 ± 3	4	Room temperature	5 ± 3	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 % (ΔR ₂₅ /R ₂₅ ≤ 30 % ^{*1)}
Step	Temperature (°C)	Period (minutes)																
1	-25 ± 5	30 ± 3																
2	Room temperature	5 ± 3																
3	150 ± 5	30 ± 3																
4	Room temperature	5 ± 3																
High Temp. Load	IEC 60738-1	85 ± 5 °C Vmax. , 1000 ± 24 HRS	No visible damage ΔR ₂₅ /R ₂₅ ≤ 20 % (ΔR ₂₅ /R ₂₅ ≤ 30 % ^{*1)}															

PTC Thermistor : TPM-S Series

SMD PTC Thermistor for Temperature Sensing




Item	Standard	Test Conditions / Methods	Specifications
Climatic Sequence	IEC 60738-1	a. Tu. x 16 HRS b. 1st cycle : 40 °C 95 %RH x 24 HRS c. -25 °C x 2 HRS d. 5 cycles : 40°C 95% RH x 24 HRS / Cycle	No visible damage $ \Delta R_{25}/R_{25} \leq 20\%$ ($ \Delta R_{25}/R_{25} \leq 30\%$ ^{*1})
Solderability	IEC 60068-2-58	245 ± 5 °C , 3 ± 0.3 sec	At least 95% of terminal electrode is covered by new solder
Resistance to Soldering Heat	IEC 60068-2-58	260 ± 5 °C , 10 ± 1 sec	No visible damage $ \Delta R_{25}/R_{25} \leq 20\%$ ($ \Delta R_{25}/R_{25} \leq 30\%$ ^{*1})
Low Temp. Storage	Specification Standard	TL ± 3 °C , 1000 ± 24 HRS	No visible damage $ \Delta R_{25}/R_{25} \leq 30\%$

*1 : Apply for TPM1S472P105R, TPM1S103P110R, TPM1S103P120R, TPM1S103P130R, TPM1S473P130R, TPM2S103P130R only.

■ Package

● Taping Specification

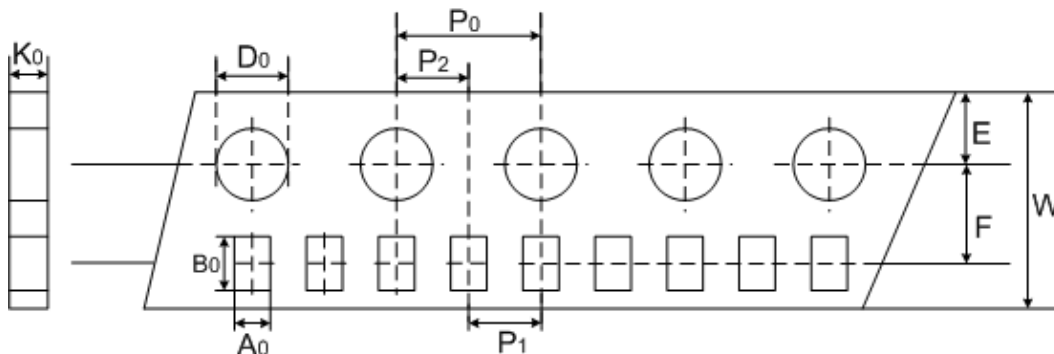


(Unit: mm)

Index Type	A ₀	B ₀	W	E	F	P ₁	P ₂	P ₀	D ₀	K ₀
0402	±0.05	±0.12	±0.2	±0.1	±0.05	±0.1	±0.05	±0.1	±0.1	±0.1
	0.62	1.12	8	1.75	3.5	2	2	4	1.55	0.60

PTC Thermistor : TPM-S Series


SMD PTC Thermistor for Temperature Sensing

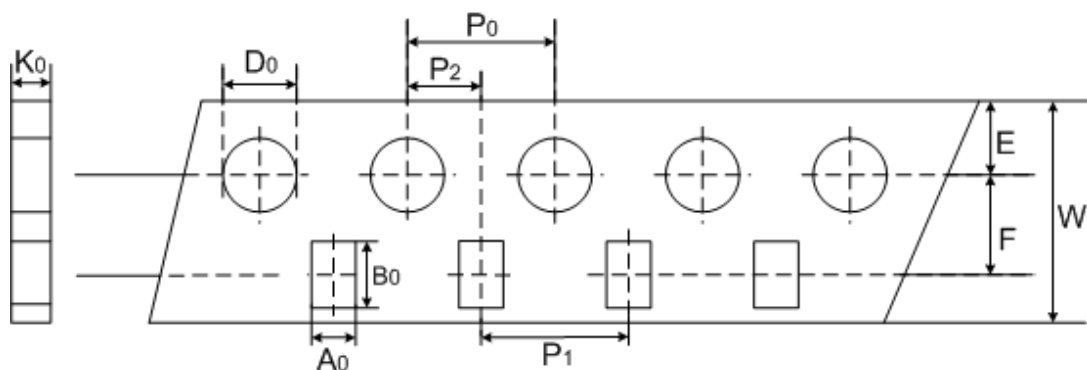

(Unit: mm)

Index Type	A ₀	B ₀	W	E	F	P ₁	P ₂	P ₀	D ₀	K ₀
0603	±0.2	±0.2	±0.2	±0.1	±0.05	±0.1	±0.05	±0.1	±0.1	±0.1
0805	1.1	1.9	8	1.75	3.5	4	2	4	1.55	0.95
0805	1.5	2.3	8	1.75	3.5	4	2	4	1.55	1.00

● Quantity

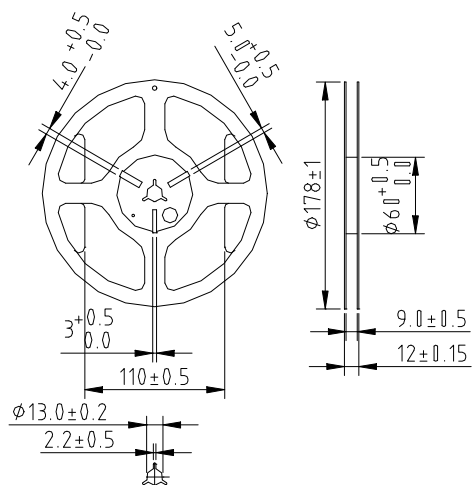

Type	Quantity(pcs/reel)
0402	10,000
0603	4,000
0805	3,500

■ Warehouse Storage Conditions of Products

● Storage Conditions :

1. Storage Temperature: -10℃~+40℃
2. Relative Humidity: ≤75%RH
3. Keep away from corrosive atmosphere and sunlight.

● Period of Storage : 1 year