



60T and 60T-B LED ringlights

Excellent performance and value ringlights.

56 LED's:  
For shadowless, bright illumination.

6 levels of brightness:  
two button, up/down control of light intensity.

Segmentable version:  
illuminate 1/4, 1/2, or 3/4 for special lighting effect.


Fits to most stereomicroscopes (clamps up to 60mm Ø).

Plug transformer keeps ringlight size to a minimum and long cable length allows equipment to be better sited for working.

- 60T LED - dimmable only
- 60T-B LED - dimmable and segmentable.



Select segments for special lighting effects

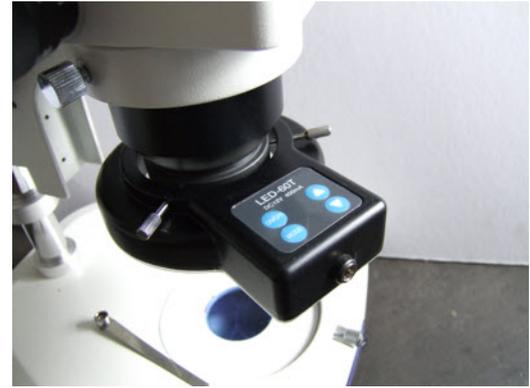

MLC-150C cold light source from Motic

150W cold light source with fully variable illumination controllable from unit or remote control box.

2500°K - 3500°K +/- 5% (3700°K with optional blue filter) with LED read out on unit.

Light output 120,000 LX, lamp life up to 2000 hours.

- Available with:
- Flex and stay 1 and 2 arm guides.
  - Fully flexible guide
  - Ringlight (up to 60mm diameter fitting).

- Bulb - 21v/150W EKE Halogen
- AC115VAC or AC230VAC switching power supply
- Fuse rating - 5A
- Remote unit cable length - 2M
- Dimensions- 192.5mm (w) x 257.3mm (d) x 117.5mm (h)
- Weight - 3kg

