

SOLARTEK NITTO INSULATION FILM

NITTO 70



HEAT REFLECTANCE (IN DURING WINTER) - 94%

GLARE REDUCTION - 22%

SUMMER HEAT REFLECTION - 51%

NITTO 80



HEAT REFLECTANCE (IN DURING WINTER) - 90%

GLARE REDUCTION - 13%

SUMMER HEAT REFLECTION - 40% Designed & manufactured in Japan Solartek are proud to bring this product to the European market where it will reduce tonnes & tonnes of CO₂ whilst saving customers thousands of pounds in energy costs.

Great solar heat & UV rejection, fade & corrosion resistant with an exclusive Manufacturers's Warranty

Turns single glazing into double glazing & double glazing into triple glazing.

High-end and spectrally selective. Elegant with a barely visible appearance.

Stay warmer during winter months & cooler throughout summer.

Reduces heating & cooling costs whilst transmitting maximum light.

ALL OF THE BENEFITS ABOVE PLUS...

REDUCES FADING

CO²
EMISSIONS

WARMERS
WINTERS
COOLER SUMMERS

At Solartek we pride ourselves on finding the best possible solution to the problems of glare, fading, unwanted heat gain, heat loss, safety, privacy, blast protection and security anywhere there is glass.

Given proper care, you will receive many years of benefit and comfort from the presence of our film on your windows.

REDUCEBILLS

SOLARTEK

*GUARANTEE

WWW.SOLARTEKFILMS.COM



SOLARTEK FILMS LTD

42b High Street Ware, Hertfordshire SG12 9BY

02071 835563

INFO@SOLARTEKFILMS.COM

DATASHEET

SOLARTEK NITTO 70

PRODUCT SPECIFICATION

RANGE: NITTO 70

VARIANT: LIGHT/MEDIUM

SHADING COEFFICIENT: 0.56

U FACTOR (SINGLE GLAZING): 3.4

U FACTOR (DOUBLE GLAZING): 2.1

EMISSIVITY: 0.06

FILM COLOUR: VIRTUALLY CLEAR

FEATURES & BENEFITS

Designed for maximum insulation in winter whilst transmitting maximum light.

High-end spectrally selective, elegant with a barely visible appearance.


Extremely low interior & external reflectivity.

Great solar heat & UV rejection, fade & corrosion resistant with an exclusive Manufacturers's Warranty

Turns single glazing into double glazing & double glazing into triple glazing.

Stay cooler by reducing excessive heat in warmer months.

% MAY CHANGE SLIGHTLY DEPENDING ON GLASS TYPE

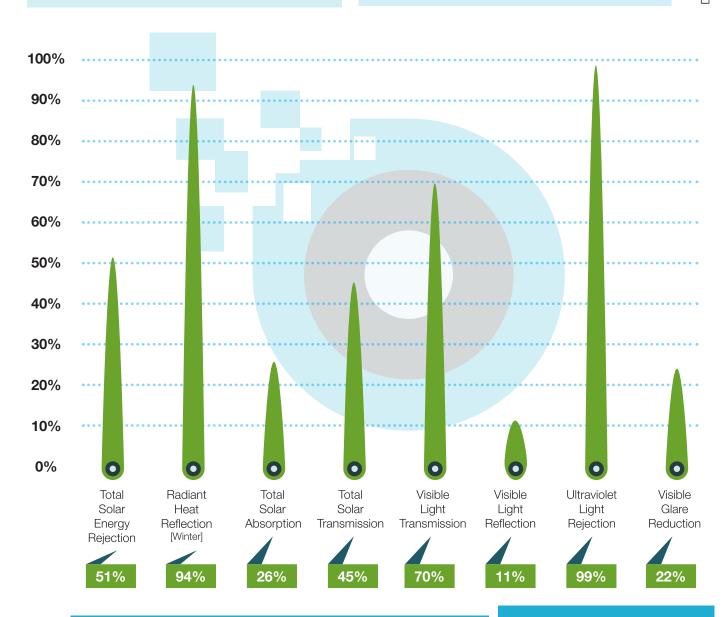

DATASHEET

SOLARTEK NITTO 80

PRODUCT SPECIFICATION

RANGE: NITTO 80

VARIANT: LIGHT

SHADING COEFFICIENT: 0.68

U FACTOR (SINGLE GLAZING): 3.48

U FACTOR (DOUBLE GLAZING): 2.2

EMISSIVITY: 0.10

FILM COLOUR: VIRTUALLY CLEAR

FEATURES & BENEFITS

Designed for maximum insulation in winter whilst transmitting maximum light.

High-end spectrally selective, elegant with a barely visible appearance.

Extremely low interior & external reflectivity.

Great solar heat & UV rejection, fade & corrosion resistant with an exclusive Manufacturers's Warranty

Turns single glazing into double glazing & double glazing into triple glazing.

Stay cooler by reducing excessive heat in warmer months.

% MAY CHANGE SLIGHTLY DEPENDING ON GLASS TYPE

