


**TECHNO RUBBER COMPANY** 

### TYPICAL INSTALLATION




Your roof is stripped and decking is checked and repaired.

Ensure deck is dry and clean.



Position Techno EPDM on the roof and allow to relax for 30-45 minutes. slightly longer in colder temperatures.



The membrane is fully adhered with a cold applied adhesive.



Attractive edge trims seal the perimeter and the site is left clean and tidy.




**TECHNO RUBBER COMPANY** 

## **TECHNO TRIM IS THE** PERFECT WAY TO FINISH YOUR RUBBER ROOF



### **Gutter Trim**

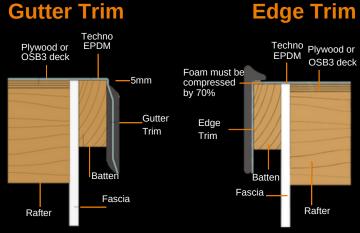



# **EASY TO INSTALL** ONE PIECE FLAT ROOFS

BROOF(t4)



www.technoepdm.co.uk

www.technoepdm.co.uk

# FUTURE PROOFING

# ONE PIECE HIGH PERFORMANCE ROOFING SYSTEM

Ideal for any residential, commercial or industrial flat roofing project, **Techno EPDM** roofing membrane is a durable, long-lasting and trouble-free system.

**Techno EPDM** is compatible with a range of substrates and comes in two thicknesses, 1.2mm or 1.52mm.



**Techno EPDM** requires no heat or naked flames to install, making it easier, faster and safer than alternatives.

### **EXCEPTIONAL DURABILITY**

**Techno EPDM** offers unmatched resistance to ozone, UV radiation, weathering and retains its physical properties over several decades.

### LOW LIFE CYCLE COST

**Techno EPDM** requires little to no maintenance and its outstanding lifespan and speedy installation results in a very low life cycle cost.









### A FULL RANGE OF ACCESSORIES AVAILABLE







- Large panel sizes
- 1.2mm Standard EPDM
- 1.52mm Heavy Duty EPDM
- CE approved
- Outstanding durability
- Low maintenance
- Puncture resistant
- Eco friendly
- BBA UK Certificate of Conformity
- ✓ Maximum roll size 12.2m x 30.5m
- Ultra violet and ozone resistant
- Unaffected by weathering
- Fully recyclable
- Full range of adhesives, tapes and primers



















