

EXPO TRUSS LED Floodlights



EXPO TRUSS Floodlights are the most powerful lights available for stand construction. With a very high light output of up to 9000 lumens, EXPO TRUSS floodlights are ideal for illuminating an entire stand from a great height. In most cases, floodlights are mounted on a truss system.

The use of floodlights in stand-building creates special requirements and safety demands. Display Lighting's floodlights are therefore fitted with a safety ring as standard.

With an easy truss clamp, you can quickly and easily mount a floodlight to a truss system. The mounting clamp is first screwed to the lamp and then screwed to the truss. With the specially developed banner pipe, the floodlight can be attached to a truss with a telescopic tube to light a banner for example.

EXPO TRUSS Floodlights are available in colour temperatures 4000K (neutral white) or 5700K (daylight white) depending on the atmosphere and appearance of the exhibition stand.



EXPO TRUSS 75

This sleek and compact 75W TRUSS Floodlight is designed specifically for lighting entire trade fair stands, it is equipped with barndoors and has a light output of up to 9000 lumens.

As standard, the 75W TRUSS Flood is equipped with a number of features that have been specially developed for stand construction.

The housing is robust, making it suitable for regular assembly and disassembly. A safety ring is fitted as standard to ensure safety when attached to a truss. Handy handles on the side make it a simple task to adjust to the correct position.

Barndoors are included to partially shield the light beam preventing visitors to the exhibition stand from looking directly into the floodlight

WHAT'S INCLUDED?

1 x EXPO TRUSS 75 LED Floodlight with 72 integrated LEDs, 4 sided adjustable barndoors and safety ring.

1 x 2m Powercon Mains Lead



Product Code/s:

- **DLFR-075-B4** - 4000K (8250lm)
- **DLFR-075-B6** - 5700K (9000lm)

Dimensions: W378 x D140mm x H235mm

Watts: 75W

Beam Angle: 90 Degrees

CRI: 80

Class: I

IP Rating: IP51

Material/s: Aluminium/Polycarbonate

Mounting Clips Available:

- **DLFR-BP** - Telescopic Mounting Arm - Black (Projection 1440mm - 1840mm)

(See Page 7)

- **DLFR-G-B** - Truss Clamp - Black (48mm - 51mm)

- **DLFR-G-S** - Truss Clamp - Silver (48mm - 51mm)

Tilt Angle: 180 Degrees

Rotation: 350 Degrees

Finish: Black

Input Power: 220-240VAC

Nett Weight: 2.8Kg

Optional Extra's:

- **DLFR-DP-75** - EXPO TRUSS 75 Opal Diffuser

(See Pages 4 & 5)

- **DLFR-S** - EXPO 100cm Safety Cable with Quick Link



EXPO TRUSS 150 TRI-COLOUR

EXPO TRUSS 150 TRI-COLOUR is a 150 Watt LED Floodlight with a high light output of up to 18000 lumens, this floodlight provides bright and powerful lighting, even in large exhibition stands. Whether you want to accentuate products, draw attention to specific elements or create a lively atmosphere, EXPO TRUSS 150 TRI-COLOUR provides the perfect lighting for a professional look. EXPO TRUSS 150 TRI-COLOUR can switch between three color temperatures: warm white (3000K), neutral white (4000K) and cold white (5700K). This allows you to create the desired atmosphere and appearance that match your stand concept. The sleek, compact and robust design makes it the ideal choice for regular construction and dismantling of exhibition stands. The spotlight is designed to withstand the challenges of a dynamic exhibition environment, where fast and efficient installation is required, you can count on durable and reliable lighting that perfectly meets the needs of your exhibition stand. To shield the LEDs and avoid dazzling visitors EXPO TRUSS 150 is equipped with adjustable barndoors. These adjustable flaps allow you to precisely control the direction and intensity of the light, creating the desired focus and spread.

WHAT'S INCLUDED?

1 x EXPO TRUSS 150 TRI-COLOUR LED Floodlight with 144 integrated LEDs, 4 sided adjustable barndoors and safety ring.
1 x 2m Powercon Mains Lead



Product Code/s: • **DLFR-150-B346** - 3000K - 4000K - 5700K (16500lm)

Dimensions: W375 x D220mm x H235mm

Watts: 150W

Beam Angle: 90 Degrees

CRI: 80

Class: I

IP Rating: IP51

Material/s: Aluminium/Polycarbonate

Mounting Clips Available: • **DLFR-BP** - Telescopic Mounting Arm - Black (Projection 1440mm - 1840mm)
(See Page 7)

• **DLFR-G-B** - Truss Clamp - Black (48mm - 51mm)

• **DLFR-G-S** - Truss Clamp - Silver (48mm - 51mm)

Tilt Angle: 180 Degrees

Rotation: 350 Degrees

Finish: Black

Input Power: 220-240VAC

Connection/s: **Built-in POWERCON input + output**

Nett Weight: 6.2Kg


Optional Extra's: • **DLFR-DP-150** - EXPO TRUSS 150 Opal Diffuser
(See Pages 4 & 5) • **DLAC-PC-500** - 5m Powercon Connection Cable
• **DLFR-S** - EXPO 100cm Safety Cable with Quick Link



EXPO TRUSS Mounting Accessories

DLFR-G-B - Truss Clamp - Black (48mm - 51mm)

DLFR-G-S - Truss Clamp - Silver (48mm - 51mm)

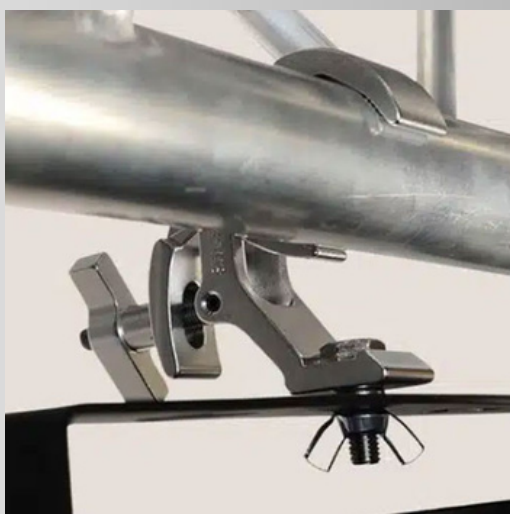

DLFR-BP

Telescopic Mounting Arm (1440mm - 1840mm)



EXPO TRUSS CONNECTION CABLES

DLAC-PC-200
2m Powercon Mains Lead



DLAC-PC-500
5m Powercon Connection Lead
EXPO 150 TRI-COLOUR ONLY



DLAC-S
30cm Steel Safety Cable

