


ZP-RZN 4404-M

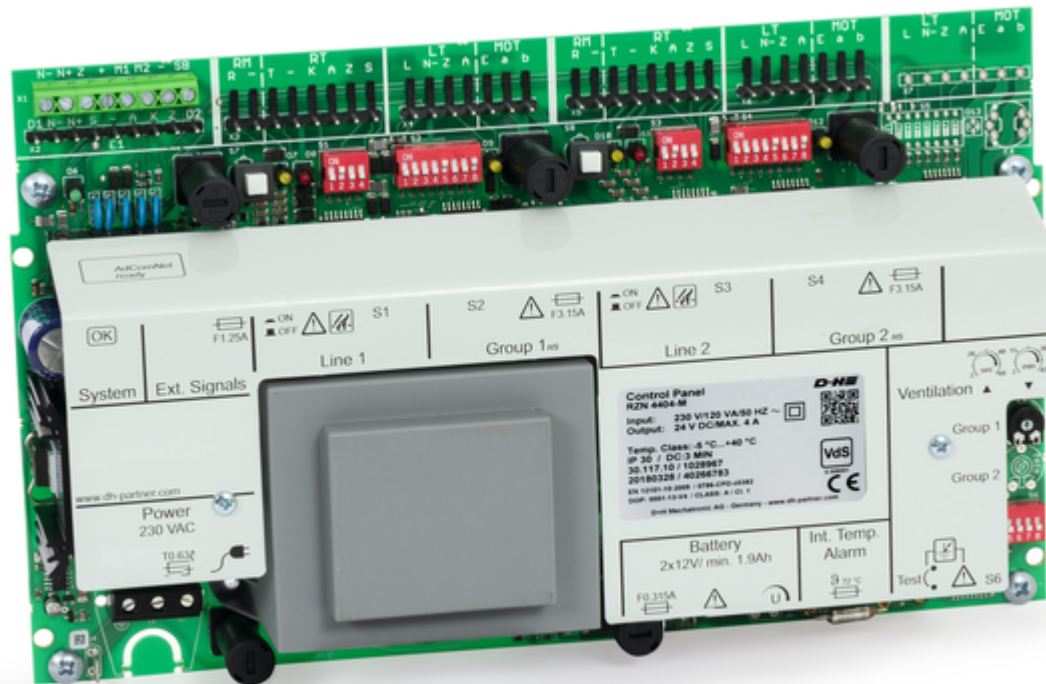

Versatile SHEV modular control panel with 4 A for small and medium-sized buildings: With 2 lines, 2 groups and an expansion slot for an additional module, the RZN 4404-M features outstanding flexibility. AdComNet ready.

Performance features

- + Compact SHEV control panel - AdComNet ready
- + Integrated comfort functions for daily natural ventilation
- + Approved by VdS in accordance with EN 12101-10 and certified according to ISO 21927-9 and fulfils the requirements of DIN 18232-9
- + Optional connection to rain detectors or wind / rain sensors without an additional module
- + Up to 4 A total drive current
- + Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- + Stabilised output voltage
- + Min. 72 hr battery backup supply
- + Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- + Option to combine SHEV / building alarm function

Approvals / Certificates

Find out about permission details from your D+H Partner.



G 506001



0786-CPR-50382

Technical data

ZP-RZN 4404-M

Supply	230 V AC / 50 Hz / 120 VA
Stand-by power	6.8 W
Output	24 V DC / 4 A
Ripple	< 2 Vss
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	2 / 2
Battery type	Typ 2 (2x)
Weight	2.7 kg
Remark	With alarm devices = Akku Typ 8 (2x)
Art. No.	30.117.10

Batteries must be ordered separately.

Example of application

