
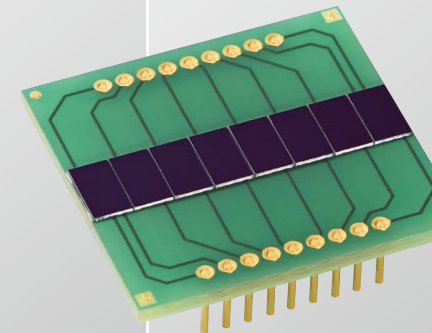
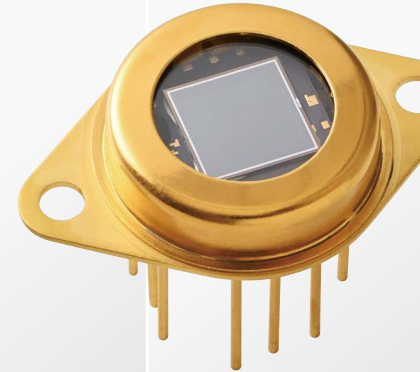
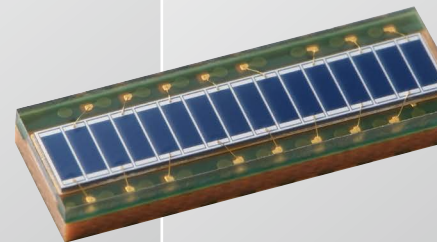


Lineup for near infrared to
ultraviolet and even to high-energy

Si photodiodes




Hamamatsu's unique semiconductor process technology achieves high speed, high sensitivity, and low noise over a wide range of wavelengths.

Hamamatsu Si photodiodes are used in a wide range of applications including medical, analytical, scientific measurements, optical communications, LiDAR, and general electronic products. These photodiodes are available in various packages such as metal, ceramic, and plastic packages, as well as in surface mount types. We also offer custom-designed devices.



Application examples


Fluorescence measurement



KAPDC0103EA

Si photodiodes are used in PCR inspection using the fluorescence method.


LCD backlight color adjustment



KSPDC0077EA

The RGB color sensor detects the white balance of LCD backlight optical waveguides and controls the light level of each RGB-LED to stabilize the LCD backlight color.


Sunlight sensors

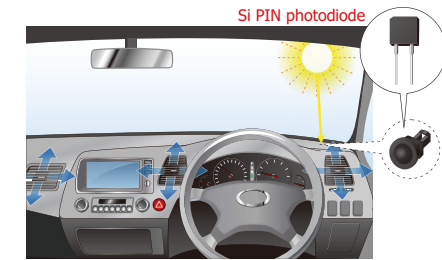

KSPDC0079EA

Si photodiodes are used to detect the amount of sunshine to control the volume of air flow for automotive air conditioners.

Reflective encoders

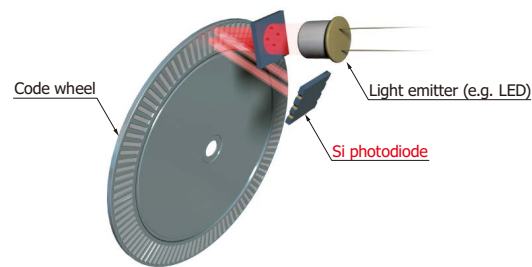

KAPDC0104EB

Si photodiode arrays are used in optical encoders.


Radiation detectors



KSPDC0081EA

Si PIN photodiodes with a scintillator are used in detectors that measure radiation levels of gamma-rays and other rays.

Baggage inspection equipment

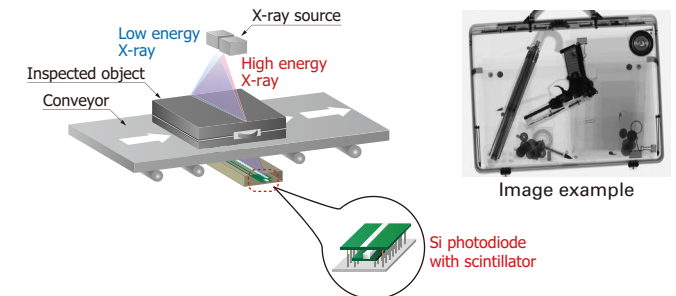

KSPDC0078EA

Si PIN photodiodes with a scintillator are used in dual energy imaging to obtain information about an object such as its type and thickness.

Package examples

Hamamatsu offers a diverse lineup of packages to meet a wide ranging market needs.


[Metal]




[Ceramic]



[Plastic]

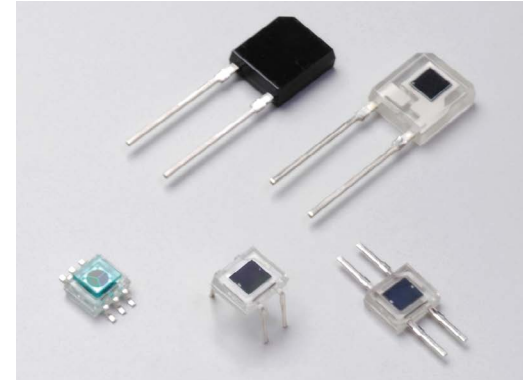


[Glass epoxy]

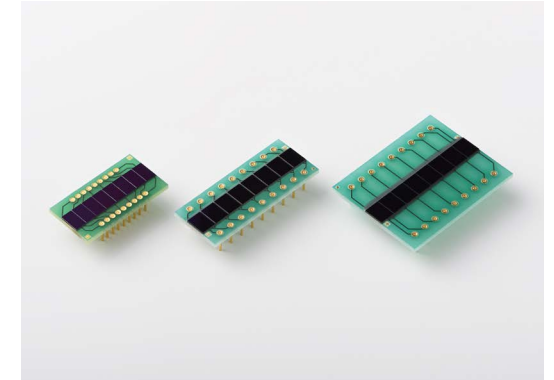


[With BNC connector]




[Surface mount type]

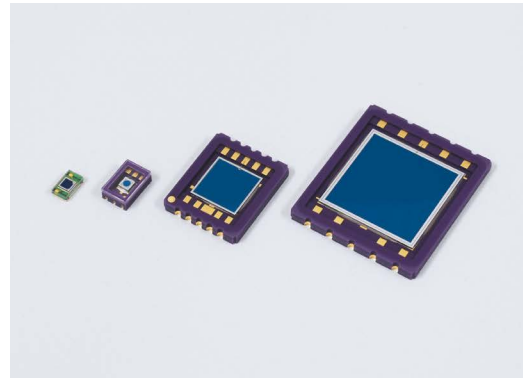

[With scintillator]

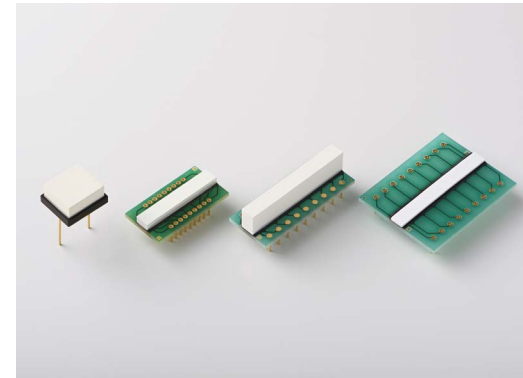

[CSP (chip size package)]

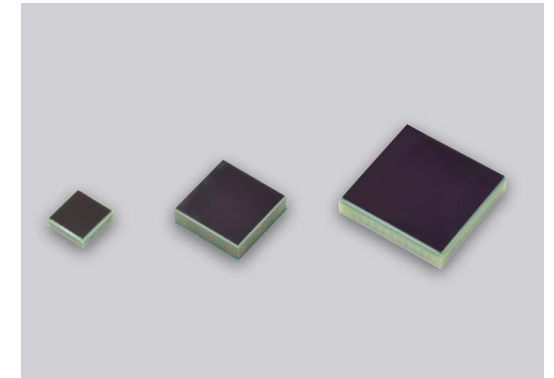


Mounting technology


We have realized mounting technology for miniaturization of elements and for direct coupling of a photodiode to ASIC, amplifier chip, etc.

Flip-chip bonding


(a) Mounting to a board

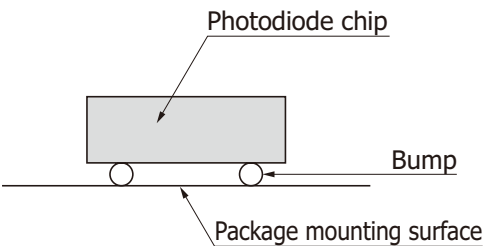


(b) Mounting to an amplifier

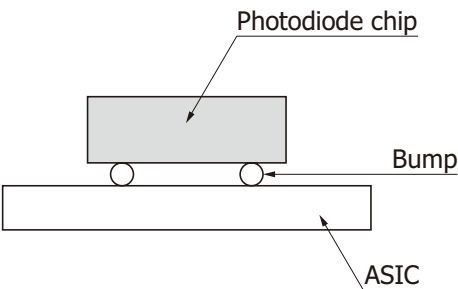

(c) Mounting an amplifier to a photodiode chip

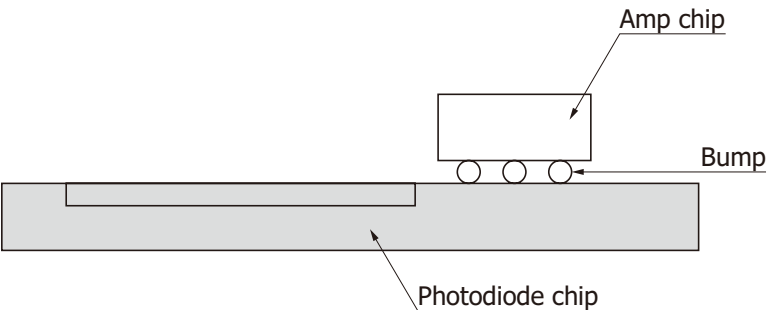

CSP (chip size package)

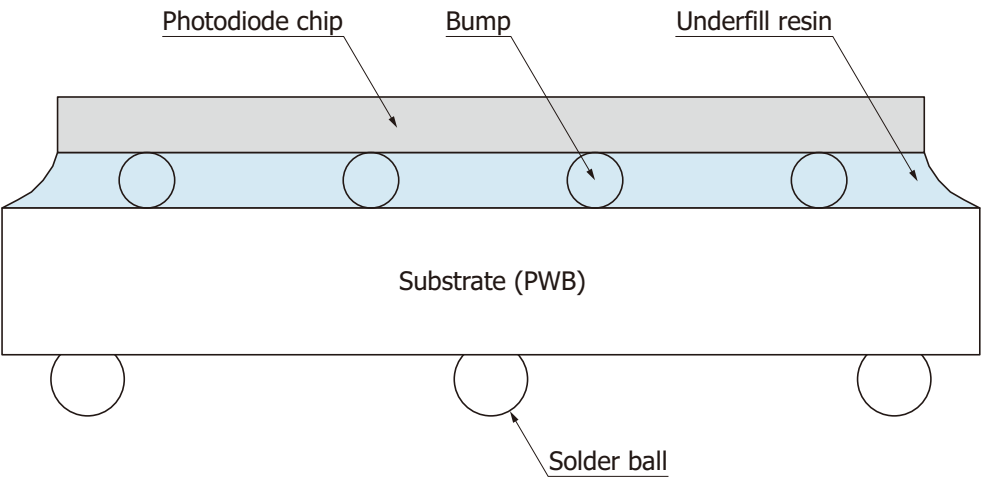


Lineup

	Type	Features
For precision photometry	· For UV to near IR range · For UV monitor · For UV to near IR range (IR sensitivity suppressed type) · For visible to near IR range	Low-light-level detection with high sensitivity and low noise
For general photometry/ visible range	· For visible range · For visible to near IR range	Low-light-level detection with high sensitivity and low noise It is also available with a visual-sensitive compensation filter.
High-speed response Si PIN photodiode	· Cutoff frequency: 1 GHz or more · Cutoff frequency: 100 MHz to less than 1 GHz · Cutoff frequency: 10 MHz to less than 100 MHz	Achieves excellent response characteristics by applying reverse voltage. Products suitable for optical fiber communications and optical pickups
Multi-element	· Segmented type Si PIN photodiodes · One-dimensional photodiode arrays · Segmented type Si photodiode	Products with multiple photosensitive areas suitable for light position detection, spectrophotometers, etc.
Surface mount type	· High-speed response Si PIN photodiodes · Small plastic package Si photodiodes · Segmented type Si photodiodes · Small plastic package Si PIN photodiodes	Surface mountable chip carrier package or plastic package type
With preamp	· Si photodiodes with preamp	Built-in preamplifier is resistant to external noise and enables compact circuit design.
TE-cooled type	· TE-cooled type Si photodiodes	Achieves excellent S/N due to built-in TE-cooler
For X-ray detection	· Si photodiodes with scintillator · Large-area Si PIN photodiodes for direct radiation detection · Large-area Si PIN photodiodes	Products combining a Si photodiode with a scintillator, suitable for X-ray baggage inspection and non-destructive inspection
Special applications	· RGB color sensors · For vacuum ultraviolet (VUV) · For YAG laser detection · PWB package type with leads · 6-element array for encoder · Violet and blue sensitivity enhanced type · For monochromatic light detection · For electron beam detection · CSP type	Photodiodes suitable for specific applications

For UV to near IR range


They are suitable for low-light-level detection in analysis and the like.

(Typ. Ta=25 °C)


Type no.	Spectral response range (nm)	Photosensitivity (A/W)		Dark current VR=10 mV max. (pA)	Terminal capacitance VR=0 V, f=10 kHz (pF)	Photosensitive area (mm)	Package	Photo
		λ=200 nm	λ=960 nm					
S1336-18BQ*	190 to 1100	0.12	0.5	20	20	1.1 × 1.1	TO-18	
S1336-18BK	320 to 1100	-		30	65	2.4 × 2.4	TO-5	
S1336-5BQ*	190 to 1100	0.12						
S1336-5BK	320 to 1100	-						
S1336-44BQ*	190 to 1100	0.12		50	150	3.6 × 3.6	TO-8	
S1336-44BK	320 to 1100	-						
S1336-8BQ*	190 to 1100	0.12		100	380	5.8 × 5.8	Ceramic	
S1336-8BK	320 to 1100	-						
S1337-16BQ*	190 to 1100	0.12	0.5	50	65	1.1 × 5.9		
S1337-16BR	340 to 1100	-	0.62			2.4 × 2.4		
S1337-33BQ*	190 to 1100	0.12	0.5	30	380	5.8 × 5.8		
S1337-33BR	340 to 1100	-	0.62					
S1337-66BQ*	190 to 1100	0.12	0.5	100	1100	10 × 10		
S1337-66BR	340 to 1100	-	0.62					
S1337-1010BQ*	190 to 1100	0.12	0.5	200	1100	10 × 10		
S1337-1010BR	340 to 1100	-	0.62					

* Refer to "Precautions against UV light exposure (P.45)."

Spectral response [S1336-BQ, S1337-BQ]

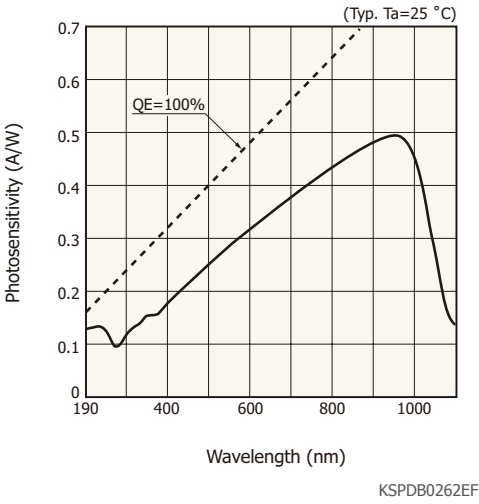


Spectral response [S1336-BK, S1337-BR]

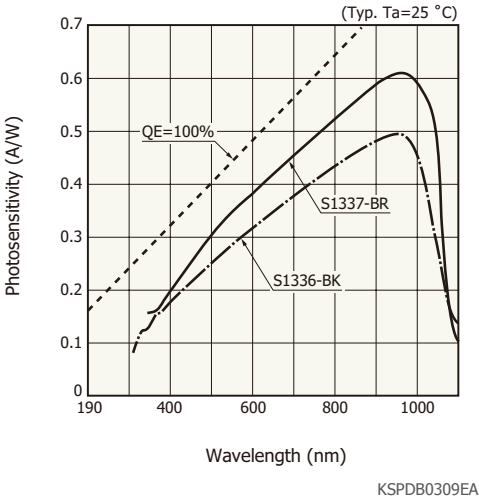

For UV to near IR range


They are suitable for low-light-level detection in analysis and the like.

(Typ. Ta=25 °C)


Type no.	Spectral response range (nm)	Photosensitivity (A/W)		Dark current VR=10 mV max. (pA)	Terminal capacitance VR=0 V, f=10 kHz (pF)	Photosensitive area (mm)	Package	Photo
		λ=200 nm	λ=960 nm					
S1337-21 *1	190 to 1100	0.13	0.52	500	4000	18 × 18	Ceramic (unsealed)	
S2281 *1 *2	190 to 1100	0.12	0.5	500	1300	φ11.3	With BNC connector	
S2281-04 *1 *2						φ7.98		

*1: Refer to “Precautions against UV light exposure (P.45).”
*2: Weak photocurrent can be amplified with low noise by connecting to the photosensor amplifier C9329-01 (using BNC-BNC coaxial cable E2573).

Spectral response [S1337-21]

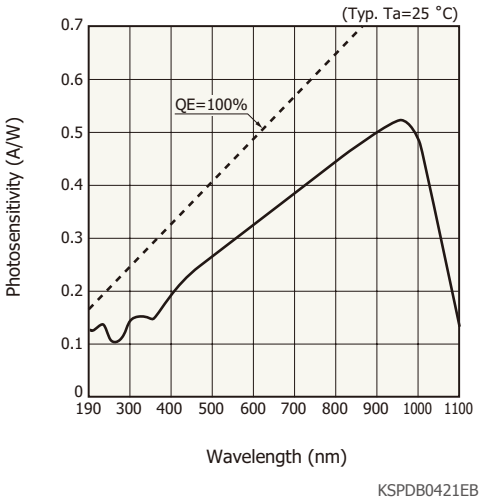

[S2281 series]

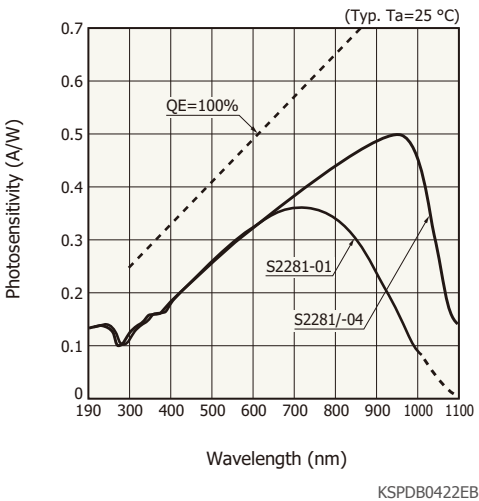


For UV to near IR range


IR sensitivity suppressed type

These Si photodiodes have suppressed sensitivity in the infrared range and are suitable for low-light-level detection in analysis and the like.

(Typ. Ta=25 °C)

Type no.	Spectral response range (nm)	Photosensitivity (A/W)		Dark current VR=10 mV max. (pA)	Terminal capacitance VR=0 V, f=10 kHz (pF)	Photosensitive area (mm)	Package	Photo	
		λ=200 nm	λ=720 nm						
S1226-18BQ*	190 to 1000	0.12	0.36	2	35	1.1 × 1.1	TO-18		
S1226-18BK	320 to 1000	-		5	160	2.4 × 2.4	TO-5		
S1226-5BQ*	190 to 1000	0.12							
S1226-5BK	320 to 1000	-							
S1226-44BQ*	190 to 1000	0.12		10	500	3.6 × 3.6	TO-8		
S1226-44BK	320 to 1000	-							
S1226-8BQ*	190 to 1000	0.12		20	1200	5.8 × 5.8	TO-8		
S1226-8BK	320 to 1000	-							
S1227-16BQ*	190 to 1000	0.12	0.36	5	170	1.1 × 5.9	Ceramic		
S1227-16BR	340 to 1000	-	0.43		160	2.4 × 2.4			
S1227-33BQ*	190 to 1000	0.12	0.36						
S1227-33BR	340 to 1000	-	0.43						
S1227-66BQ*	190 to 1000	0.12	0.36	20	950	5.8 × 5.8			
S1227-66BR	340 to 1000	-	0.43						
S1227-1010BQ*	190 to 1000	0.12	0.36	50	3000	10 × 10			
S1227-1010BR	340 to 1000	-	0.43						
S2281-01*	190 to 1000	0.12	0.36	300	3200	φ11.3	With BNC connector		

* Refer to "Precautions against UV light exposure (P.45)."

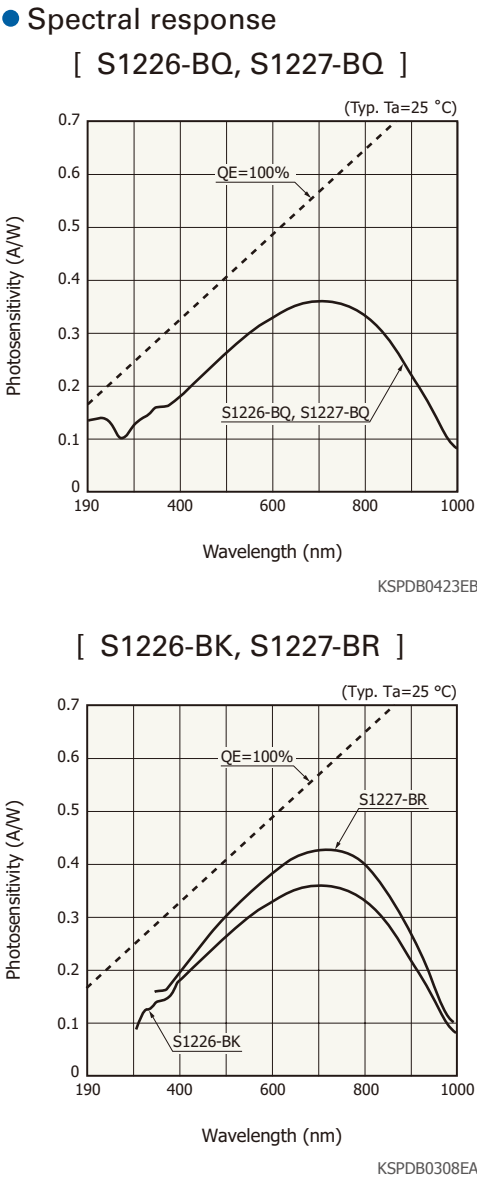

For UV monitor

The S12698 series have a structure that does not use resin and are types that have achieved high reliability against UV light. The S15289-33 is a back-illuminated type photodiode designed to minimize dead space around the product. Multiple units can be arranged in a tile format. High-speed response S16586 is also available.

(Typ. Ta=25 °C)

Type no.	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=10\text{ mV}$ max. (pA)	Photosensitive area (mm)	Package	Photo
S12698 *1 *2	0.38	10	1.1 × 1.1	TO-18	
S12698-01 *1 *2		30	2.4 × 2.4	TO-5	
S12698-04 *1		50	3.6 × 3.6		
S12698-02 *1		100	5.8 × 5.8	TO-8	
S15289-33	0.54	300	2.5 × 2.5	Glass epoxy	

*1: Refer to “Precautions against UV light exposure ① (P.45).”

*2: 3-pin type is available.


High-speed response type

(Typ. Ta=25 °C)


Type no.	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=10\text{ V}$ max. (pA)	Cutoff frequency $V_R=10\text{ V}$ (MHz)	Terminal capacitance $V_R=10\text{ V}, f=1\text{ MHz}$ (pF)	Photosensitive area (mm)	Package	Photo
S16586 *3	0.38	500	300	3.5	φ0.8	TO-18	

*3: Refer to “Precautions against UV light exposure ① (P.45).”

Spectral response

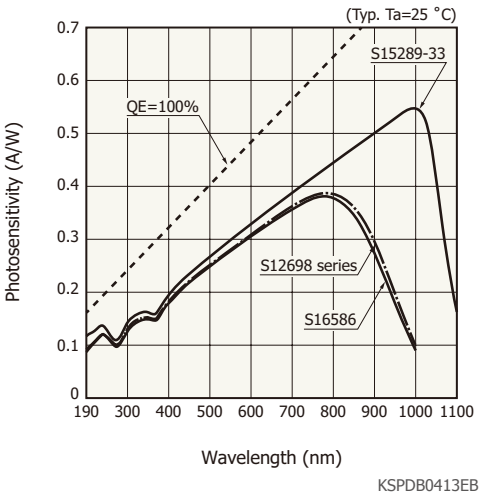

Change in spectral response due to UV irradiation

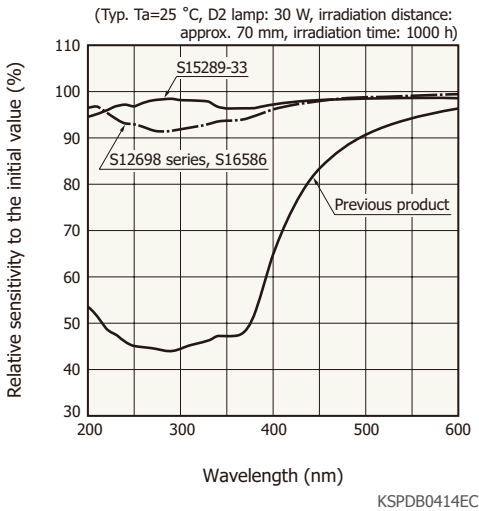


For visible to near IR range

These have sensitivity in the visible to infrared region, and achieve high sensitivity in the near infrared region.

(Typ. Ta=25 °C)

Type no.	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Dark current VR=10 mV max. (pA)	Terminal capacitance VR=0 V, f=10 kHz (pF)	Photosensitive area (mm)	Package	Photo
S2386-18K	320 to 1100	0.6	2	140	1.1 × 1.1	TO-18	
S2386-18L							
S2386-5K			5	730	2.4 × 2.4	TO-5	
S2386-44K							
S2386-45K							
S2386-8K							
			20	1600	3.6 × 3.6	TO-5	
			30	2300	3.9 × 4.6		
			50	4300	5.8 × 5.8	TO-8	

● Spectral response

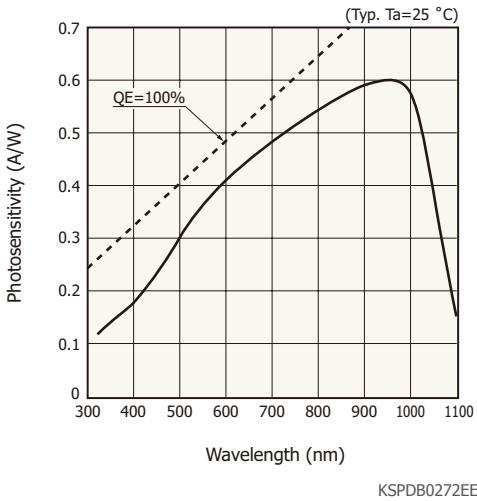


For visible to near IR range

These have sensitivity in the visible to infrared region, and achieve high sensitivity in the near infrared region.


(Typ. Ta=25 °C)

Type no.	Spectral response range (nm)	Photosensitivity $\lambda=960\text{ nm}$ (A/W)	Dark current $V_R=10\text{ mV max.}$ (pA)	Terminal capacitance $V_R=0\text{ V, f}=10\text{ kHz}$ (pF)	Photosensitive area (mm)	Package	Photo
S12915-16R	340 to 1100	0.64	5	740	1.0 × 6.0	Ceramic	
S12915-33R				680	2.4 × 2.4		
S12915-66R			50	4000	5.8 × 5.8		
S12915-1010R				13000	10 × 10		
S16008-33	380 to 1100	0.64	5	700	2.4 × 2.4	Glass epoxy	
S16008-66			50	4000	5.87 × 5.87		
S16008-1010			200	14000	10 × 10		

● Spectral response
[S12915 series]

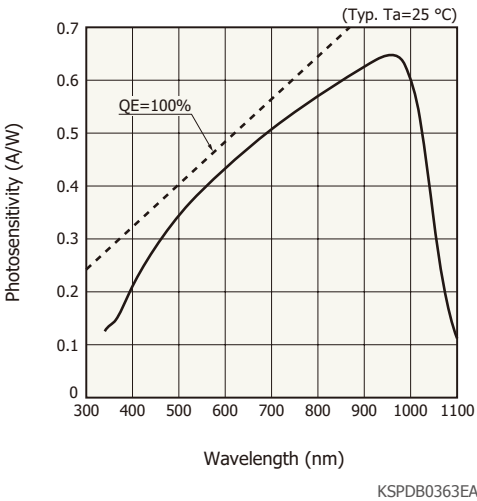

[S16008 series]

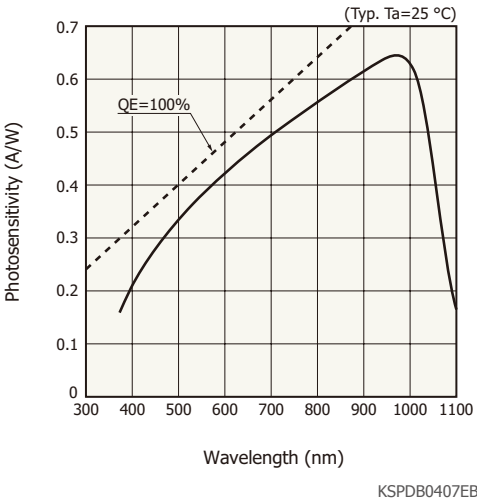


For visible range

With visual-sensitive compensation filter

(Typ. Ta=25 °C)


Type no.	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=1\text{ V}$ max. (pA)	Photosensitive area (mm)	Package	Photo
S1787-04	320 to 730	560	0.3	10	2.4 × 2.8	Plastic	
S16838-01MS	320 to 730	560	0.58	10	2.4 × 2.8	Plastic	

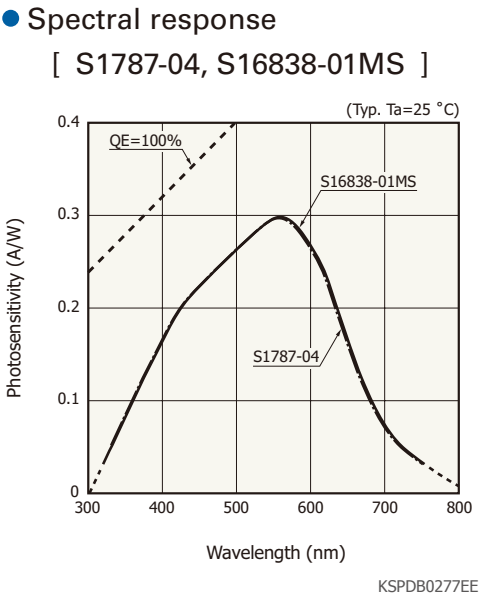

With CIE spectral luminous efficiency approximation filter

(Typ. Ta=25 °C)


Type no.	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=1\text{ V}$ max. (pA)	Photosensitive area (mm)	Package	Photo
S9219	380 to 780	550	0.24	500 ($V_R=10\text{ mV}$)	$\phi 11.3$	With BNC connector	
S9219-01			0.22	50 ($V_R=10\text{ mV}$)	3.6 × 3.6	TO-5	
S16839-01MS	480 to 660		0.38	20	2.4 × 2.8	Plastic	

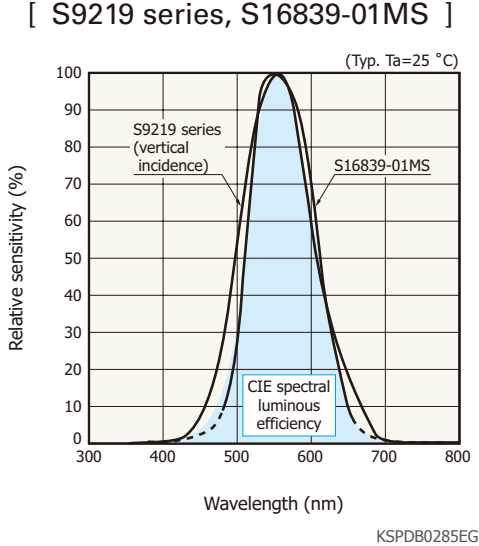


For visible to near IR range

These photodiodes have sensitivity in the visible to near infrared range.

(Typ. Ta=25 °C)

Type no.	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=1\text{ V}$ max. (pA)	Photosensitive area (mm)	Package	Photo
S1787-12	320 to 1000	650	0.35	20	2.4 × 2.8	Plastic	
S4797-01		720	0.4		1.3 × 1.3		
S4011-06DS	320 to 1100	960	0.58	10	1.3 × 1.3	Plastic	
S1787-08					2.4 × 2.8		
S2833-01							
S2833-04	320 to 1100	960	0.58	10	2.4 × 2.8	Plastic	
S16765-01MS	320 to 1000	720	0.4	20	2.4 × 2.8	Plastic	
S16838-02MS	320 to 1100	960	0.58	10	2.4 × 2.8	Plastic	
S16840-02MS	320 to 1100	960	0.58	10	1.3 × 1.3	Plastic	

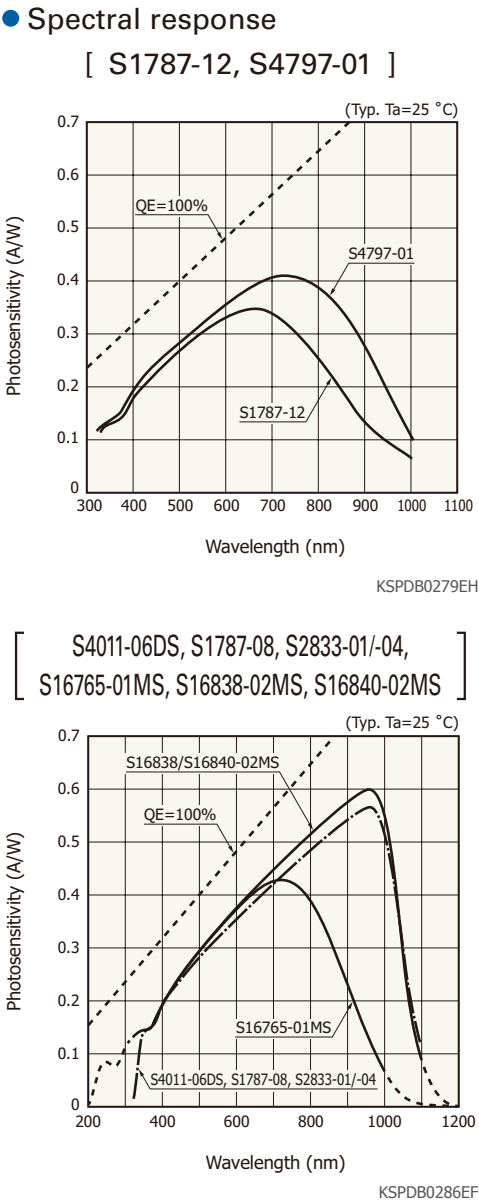

Cutoff frequency


From 1 GHz or more

These Si PIN photodiodes deliver a wide bandwidth even with a low bias, making them suitable for optical communications and high-speed photometry.

(Typ. Ta=25 °C)

Type no.	Cutoff frequency (GHz)	Photosensitive area (mm)	Photosensitivity (A/W)		Terminal capacitance f=1 MHz (pF)	Package	Photo
			λ=780 nm	λ=830 nm			
S5973	1 (VR=3.3 V)	φ0.4	0.51	0.47	1.6 (VR=3.3 V)	TO-18	
S5973-01							
S9055	1.5 (VR=2 V)	φ0.2	0.35	0.25	0.8 (VR=2 V)		
S9055-01	2 (VR=2 V)	φ0.1			0.5 (VR=2 V)		

● Spectral response

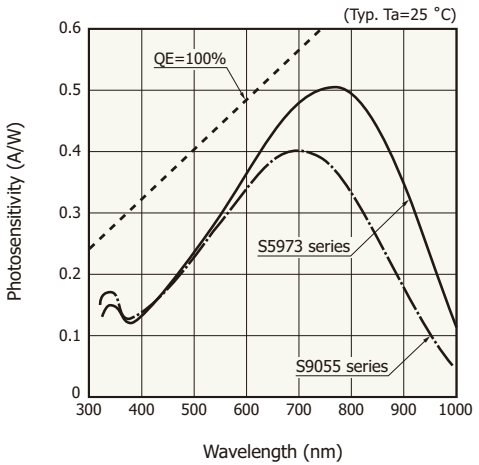

KPINB0326EB

Cutoff frequency


100 MHz to less than 1 GHz

These Si PIN photodiodes have a large photosensitive area ($\phi 0.79$ to $\phi 3$ mm) yet deliver excellent frequency response characteristics.


Type no.	Cutoff frequency (MHz)	Photosensitive area (mm)	Photosensitivity (A/W)		Terminal capacitance f=1 MHz (pF)	Package	Photo
			$\lambda=660$ nm	$\lambda=780$ nm			
S5971	100 (VR=10 V)	$\phi 1.2$	0.44	0.55	3 (VR=10 V)	TO-18	
S3399		$\phi 3$	0.45	0.58	20 (VR=10 V)	TO-5	
S3883	300 (VR=20 V)	$\phi 1.5$			6 (VR=20 V)		
S10783	300 (VR=2.5 V)	$\phi 0.8$	0.46	0.52	4.5 (VR=2.5 V)	Plastic	
S10784		$\phi 3$ (lens diameter)	0.45	0.51		Plastic with lens	
S11062-35GT NEW		$\phi 0.79$	0.46	0.52		Glass epoxy	
S5972	500 (VR=10 V)	$\phi 0.8$	0.44	0.55	3 (VR=10 V)	TO-18	
S13337-01						Ceramic	

Spectral response

[S5971, S5972, S3399, S3883, S13337-01]

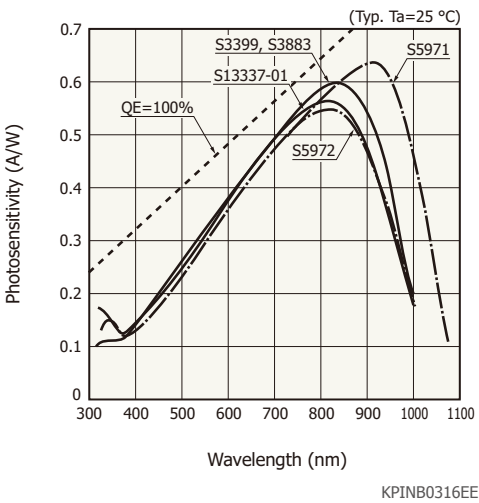

[S10783, S10784, S11062-35GT]

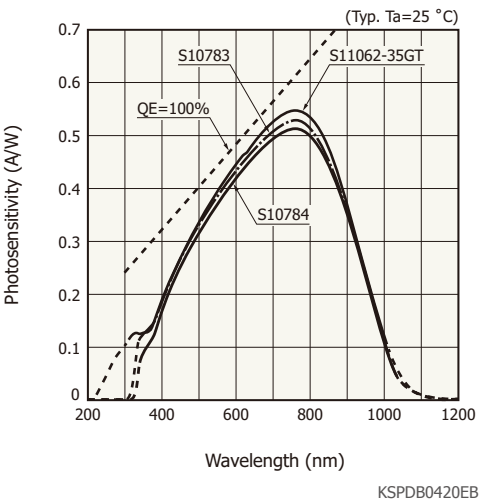

Cutoff frequency

10 MHz to less than 100 MHz




A wide variety of types are provided including a low-cost plastic package type and a visible-cut type.

(Typ. Ta=25 °C)

Type no.	Cutoff frequency (MHz)	Photosensitive area (mm)	Photosensitivity (A/W)		Terminal capacitance f=1 MHz (pF)	Package	Photo
			λ=660 nm	λ=780 nm			
S6775	15 (VR=10 V)	5.5 × 4.8	0.45	0.55	40 (VR=10 V)	Plastic	
S6967	50 (VR=10 V)				50 (VR=10 V)		
S6775-01	15 (VR=10 V)		0.54 (λ=830 nm)	0.68 (λ=λp)	40 (VR=10 V)	Plastic (visible-cut type)	
S6967-01	50 (VR=10 V)			0.63 (λ=λp)	50 (VR=10 V)		
S8385	25 (VR=5 V)	2 × 2	0.4	0.48	12 (VR=5 V)	Plastic	
S8729		2 × 3.3	0.45	0.55	16 (VR=5 V)		
S8729-04			0.52 (λ=830 nm)	0.68 (λ=λp)		Plastic (visible-cut type)	
S8729-10			0.45	0.55		Plastic	
S2506-02	25 (VR=12 V)	2.77 × 2.77	0.4	0.48	15 (VR=12 V)	Plastic (visible-cut type)	
S2506-04			0.25 (λ=830 nm)	0.56 (λ=λp)			
S4707-01	20 (VR=10 V)	2.4 × 2.8	0.4	0.48	14 (VR=10 V)	Plastic	

Spectral response

[S6775/S6967 series]

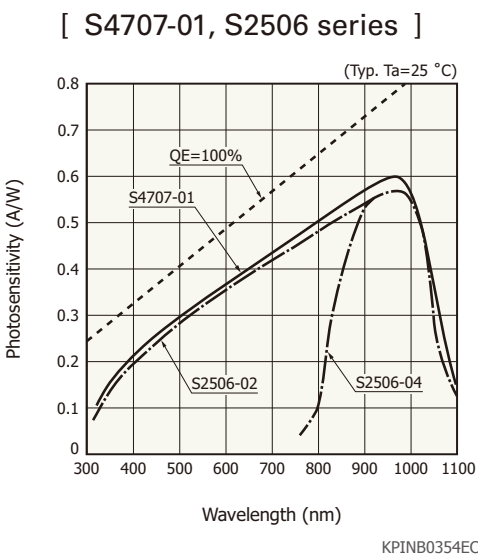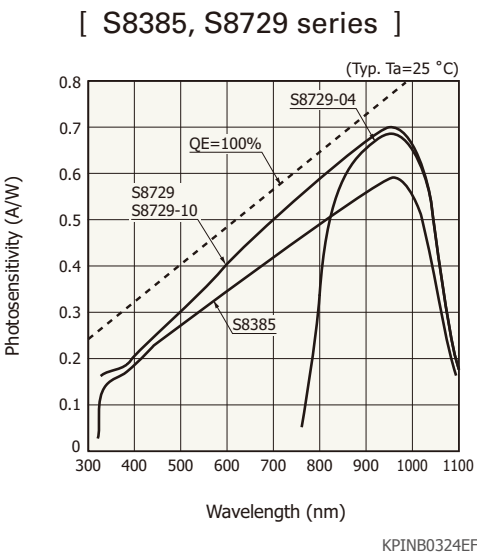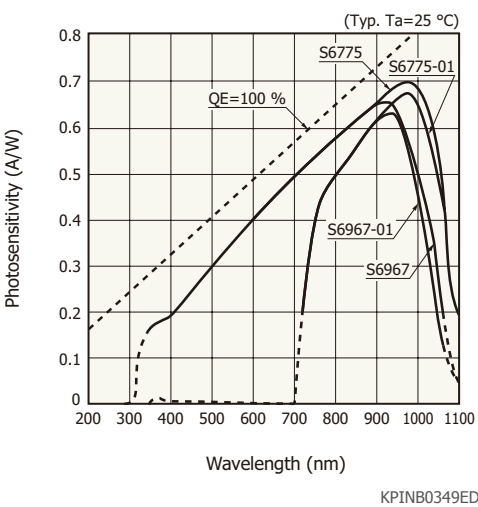

Cutoff frequency

10 MHz to less than 100 MHz


These are Si PIN photodiodes in a plastic package with a lens. A visible-cut type is available.

(Typ. Ta=25 °C)

Type no.	Cutoff frequency VR=10 V (MHz)	Photosensitive area λ=850 nm (mm)	Photosensitivity (A/W)	Terminal capacitance f=1 MHz, VR=10 V (pF)	Package	Photo
			λ=850 nm			
S6036	25*	φ7 (lens diameter)	0.56 (λ=λp)	15*	Plastic with lens	
S6036-01					Plastic with lens (visible-cut type)	
S6801	50	φ14 (lens diameter)	0.63	40	Plastic with lens	
S6968			0.63	50		
S6801-01	15		0.55	40	Plastic with lens (visible-cut type)	
S6968-01						

* VR=12 V

• Spectral response

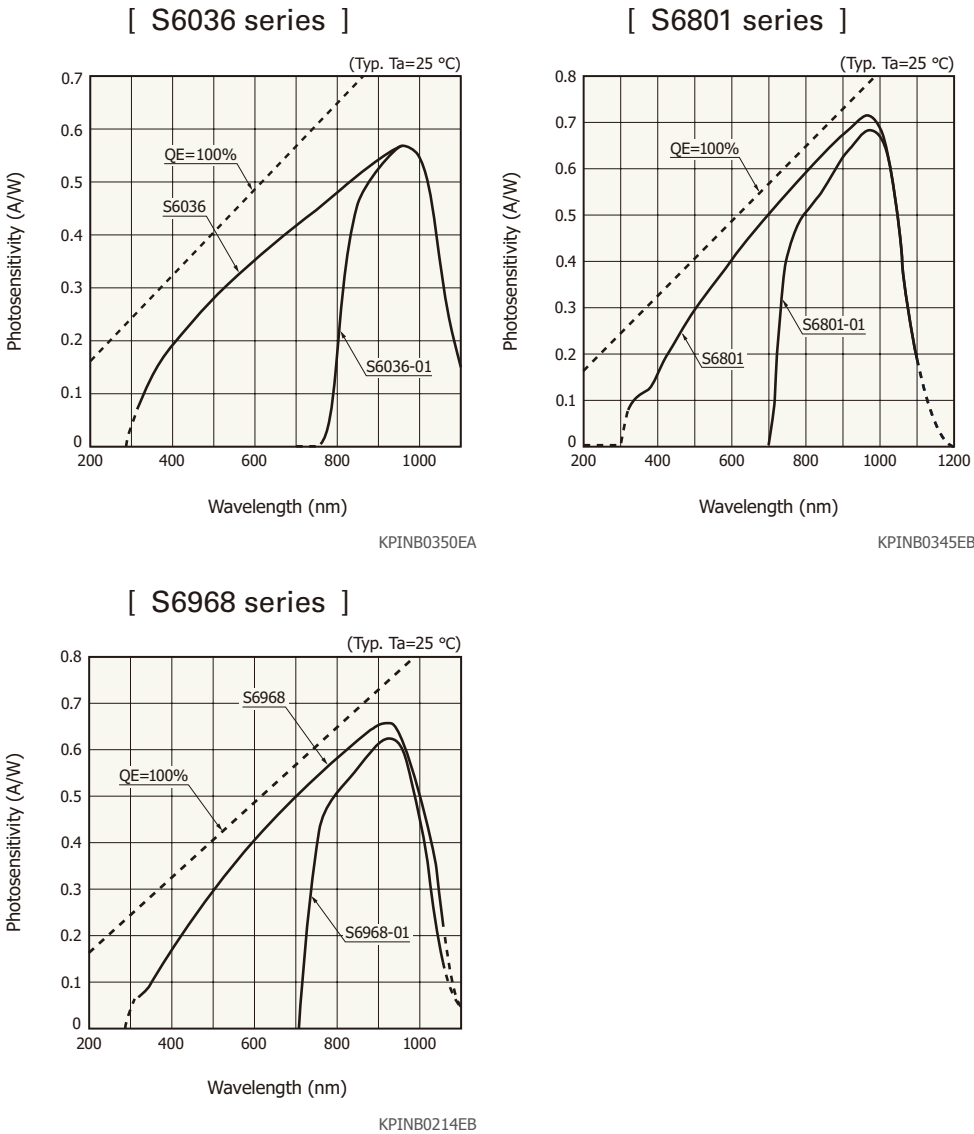

Cutoff frequency

10 MHz to less than 100 MHz





Metal package types are available.

Type no.	Cutoff frequency (MHz)	Photosensitive area (mm)	Photosensitivity (A/W)		Terminal capacitance f=1 MHz (pF)	Package	Photo	
			λ=660 nm	λ=780 nm				
S5821	25 (VR=10 V)	φ1.2	0.45	0.52	3 (VR=10 V)	TO-18		
S5821-02								
S5821-01		φ4.65 (lens diameter)						
S5821-03								
S9119-01	80 (VR=10 V)	0.88 × 0.88	0.63 (λ=870 nm)		5 (VR=10 V)	TO-18		
S1223	30 (VR=20 V)	2.4 × 2.8	0.45	0.52	10 (VR=20 V)	TO-5		
S1223-01	20 (VR=20 V)	3.6 × 3.6			20 (VR=20 V)			
S3072	45 (VR=24 V)	φ3	0.47	0.54	7 (VR=24 V)	TO-8		
S3071	40 (VR=24 V)	φ5			18 (VR=24 V)			
S12271*	60 (VR=100 V)	φ4.1			10 (VR=100 V)			

* Refer to “Precautions against UV light exposure (P.45).”


Spectral response

[S5821 series, S3071, S3072]

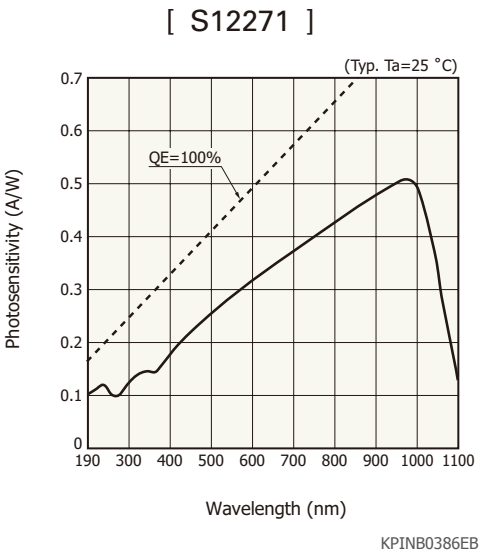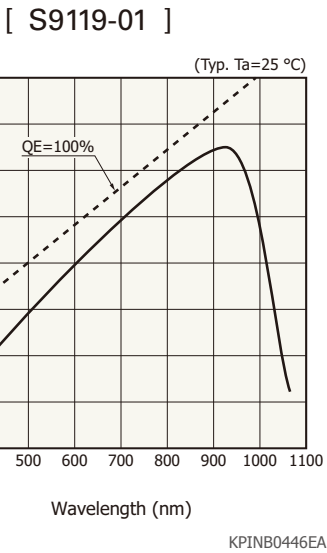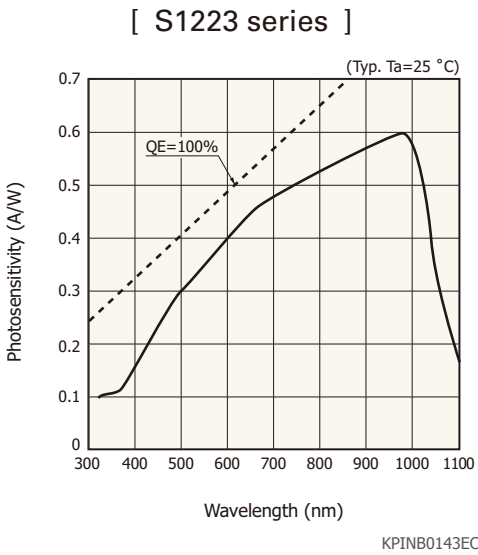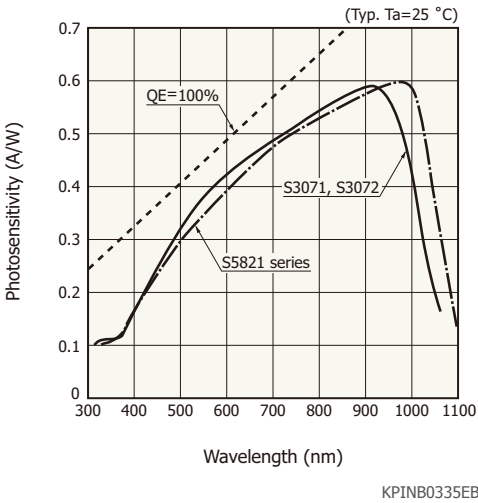


Segmented type Si PIN photodiodes

These Si PIN photodiodes consist of 2 or 4 elements having sensitivity in the UV to near infrared range.

Type no.	Number of elements	Photosensitive area (mm)	Photosensitivity (A/W)	Cutoff frequency VR=10 V, RL=50 Ω (MHz)	Dark current VR=10 V max. (nA)	Terminal capacitance VR=10 V, f=1 MHz (pF)	Package	Photo
S3096-02	2	1.2 × 3 /2-segment	0.39 (λ=650 nm)	25	0.5*1	5	Plastic	
S4204		1 × 2 /2-segment	0.45 (λ=650 nm)	30	1*1	3		
S9345		1.5 × 1.5 + 1.5 × 4.1	0.45 (λ=650 nm)	15	5*1	4 Photodiode A 10 Photodiode B		
S4349 *2	4	3 × 3 /4-segment	0.45 (λ=720 nm)	20 (VR=5 V)	0.2 (VR=5 V)	25 (VR=5 V)	TO-5	


*1: Total value of all elements
*2: Refer to “Precautions against UV light exposure ([P.45](#)).”

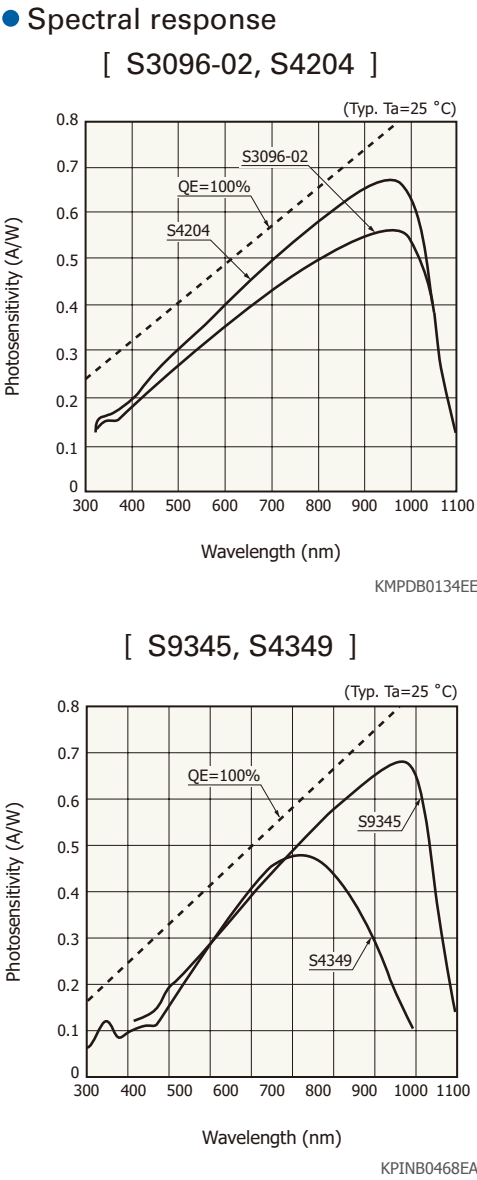


Segmented type Si photodiodes

The S10359 is a quadrant Si photodiode that has achieved high reliability for ultraviolet light.

(Typ. Ta=25 °C)

Type no.	Number of elements	Photosensitive area (mm)		Photosensitivity (A/W)	Rise time VR=0 V RL=1 kΩ (μs)	Dark current VR=10 V max. (nA)	Terminal capacitance VR=10 V, f=1 MHz (pF)	Package	Photo
S10359	4	10 × 10 /4-segment		0.06 (λ=193 nm)	1	0.02 (VR=10 mV)	500 (VR=0 V, f=10 kHz)	Metal	







● Spectral response

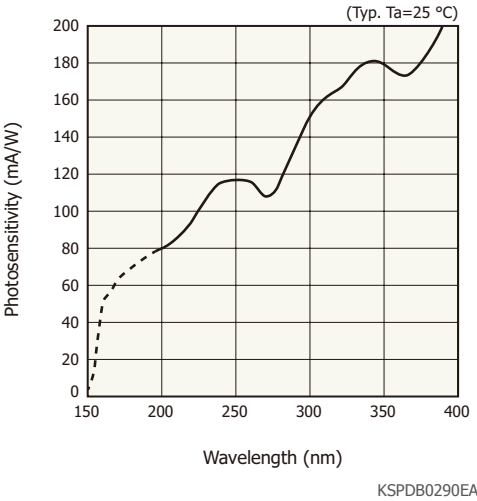


One-dimensional photodiode arrays

These one-dimensional photodiode arrays have rectangular photosensors equally spaced at a pitch of about 1 mm.

(Typ. Ta=25 °C)

Type no.	Number of elements	Element pitch (mm)	Element size W × H (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Dark current VR=10 mV max. (pA)	Terminal capacitance VR=0 V, f=10 kHz (pF)	Package	Photo	
S4111-16Q*	16	1.0	0.9 × 1.45	190 to 1100	0.58	5	200	Ceramic		
S4111-16R				340 to 1100						
S4111-35Q*	35		0.9 × 4.4	190 to 1100		10	550			
S4111-46Q*	46			190 to 1000	0.50 (λ=800 nm)					60
S4114-35Q*	35									
S4114-46Q*	46									
S12858-021	16	1.17	0.77 × 2.5	340 to 1100	0.61 (λ=920 nm)	30		30	Glass epoxy (unsealed)	
S12859-021							1.575			
S11299-021		50	75							
S11212-021										
S12362-021		2.5	2.2 × 2.7							
S12363-021										

* Refer to “Precautions against UV light exposure (P.45).”

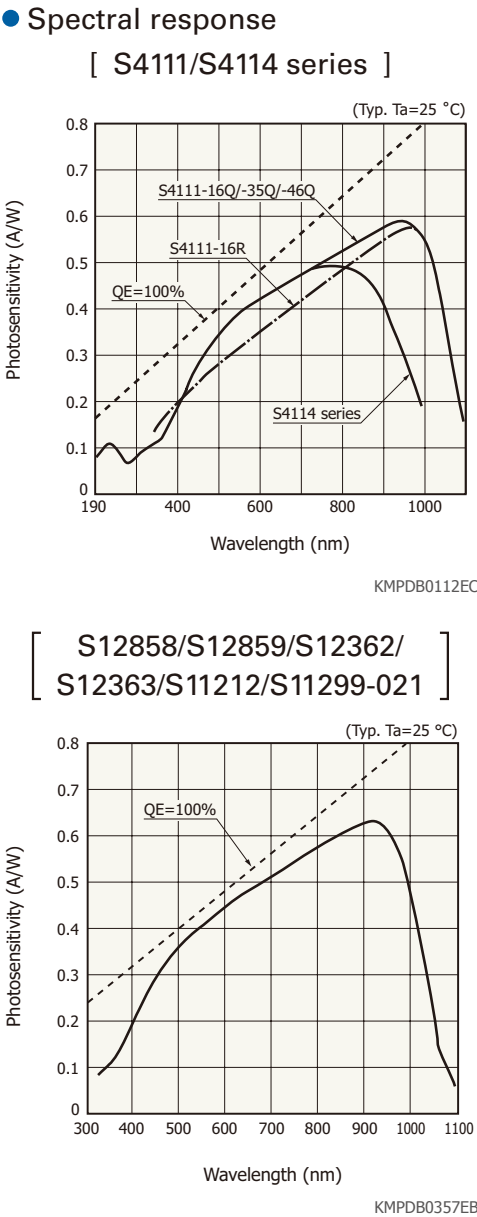


High-speed response Si PIN photodiodes

These are photodiodes sealed in a chip carrier package suitable for surface mounting and allowed solder reflow mounting on PC boards for automated processes.

(Typ. Ta=25 °C)






Type no.	Cutoff frequency VR=10 V (MHz)	Photosensitive area (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Terminal capacitance VR=10 V, f=1 MHz (pF)	Package	Photo
S5106	20	5 × 5	320 to 1100	0.72	40	Ceramic	
S5107	10	10 × 10			150		
S7509	20	2 × 10			40		
S7510	15	6 × 11			80		
S7478	20	5 × 5			40	Plastic	
S15152 	20	5 × 5	380 to 1100	0.69	43 (f=10 kHz)	Plastic	

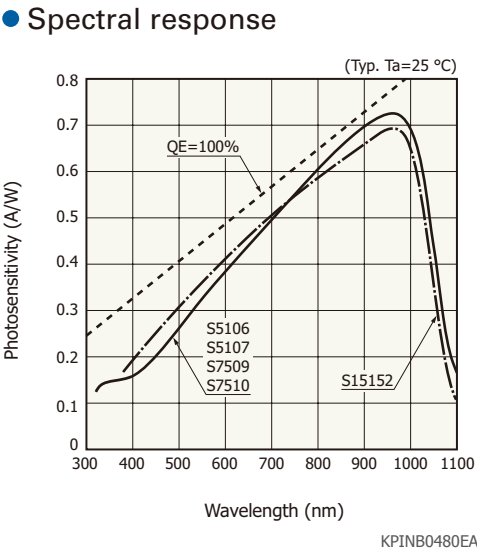


Segment type Si photodiodes

These Si PIN photodiodes consist of 2, 4 or 16 segments and are sealed in a chip carrier package suitable for surface mounting. They can be mounted using solder reflow, which facilitates automation.

(Typ. Ta=25 °C)

Type no.	Number of elements	Photosensitive area (mm)		Spectral response range (nm)	Photosensitivity $\lambda=960\text{ nm}$ (A/W)	Cutoff frequency $V_R=10\text{ V}$ (MHz)	Terminal capacitance $V_R=10\text{ V}$, $f=1\text{ MHz}$ (pF)	Package	Photo
S5980	4	5 × 5 /4-segment		320 to 1100	0.72	25	10	Ceramic	
S5981		10 × 10 /4-segment				20	35		
S5870	2	10 × 10 /2-segment				10	50		
S8558	16	2 × 12.7 /16-segment				380 to 1100	0.63		25
S15158					60 (total value of all elements)				

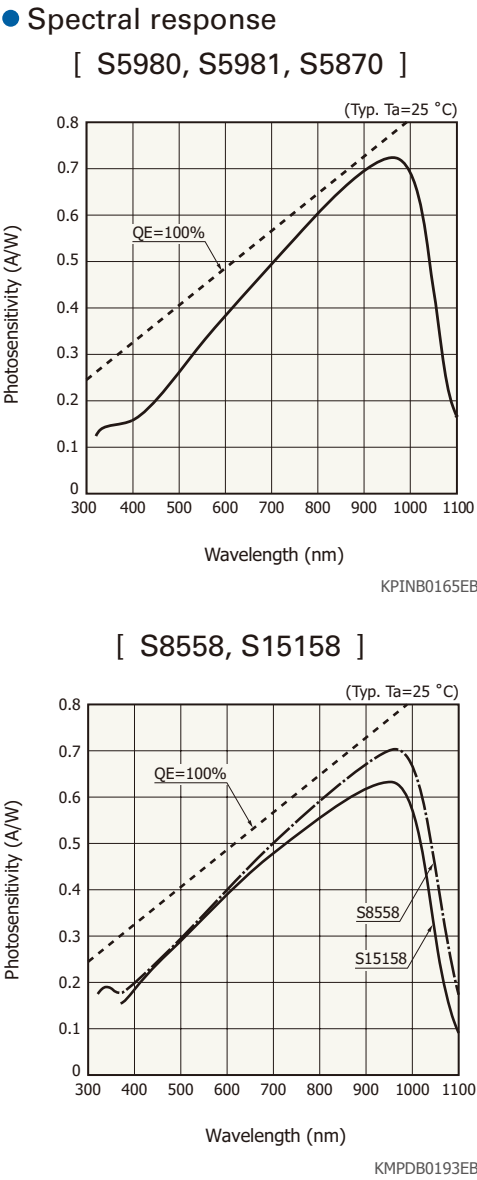

Small plastic package



Si photodiodes

These surface mount type Si photodiodes are mounted on small plastic packages. They can be mounted with solder reflow, and are easily automated because they are tape packaged.

(Typ. Ta=25 °C)						
Type no.	Photosensitive area (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Terminal capacitance VR=0 V f=10 kHz (nF)	Package	Photo
S9674	2 × 2	320 to 1100	0.7	0.5	Glass epoxy	
S9981-01CT	1.3 × 1.3		0.65	0.2		
S10625-01CT			0.54 (λ=940 nm)			
S16008-33	2.4 × 2.4	380 to 1100	0.64	0.7 (f=1 MHz)		
S16008-66	5.8 × 5.8			4 (f=1 MHz)		
S16008-1010	10 × 10			13 (f=1 MHz)		

Spectral response

[S9674, S9981-01CT, S10625-01CT]

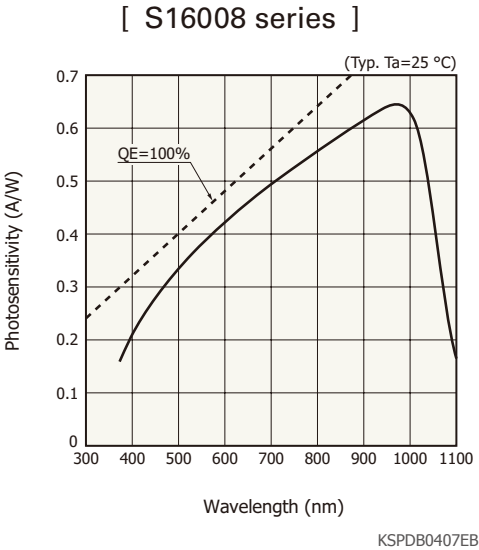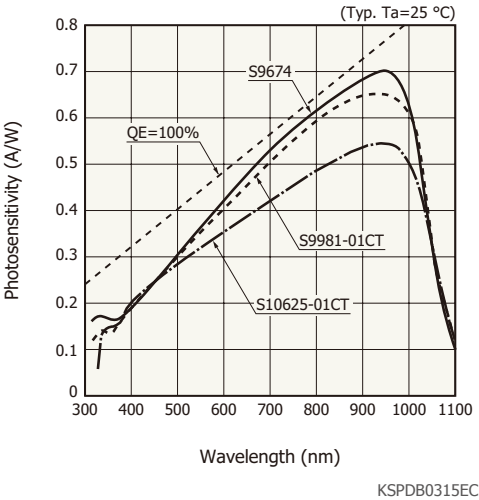

Small plastic package

Si PIN photodiodes



These surface mount type Si PIN photodiodes are mounted on small plastic packages. They can be mounted with solder reflow, and are easily automated because they are tape packaged.

(Typ. Ta=25 °C)

Type no.	Photosensitive area (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Terminal capacitance f=1 MHz (pF)	Package	Photo
S13773	φ0.8	380 to 1000	0.54 (λ=800 nm)	3 (VR=10 V)	Glass epoxy	
S15193			0.64 (λ=920 nm)	2 (VR=10 V)		
S10993-02CT	1.06 × 1.06	380 to 1100	0.6	6 (VR=2.5 V)		
S13954-01CT	φ1.5	320 to 1000	0.5 (λ=780 nm)	13 (VR=3 V)		
S14016-01DT	2.1 × 1.8	320 to 1100	0.7	12 (VR=5 V)	Plastic	
S16392-01CT	2.77 × 2.77	320 to 1100	0.7	15 (VR=12 V)	Glass epoxy	
S11062-35GT	φ0.79	330 to 1000	0.52 (λ=780 nm)	45 (VR=2.5 V)		

● Spectral response


S13773, S15193, S10993-02CT,
S13954-01CT, S14016-01DT, S16392-01CT

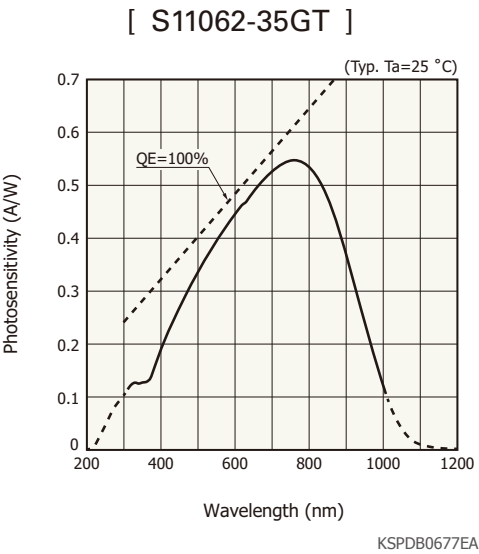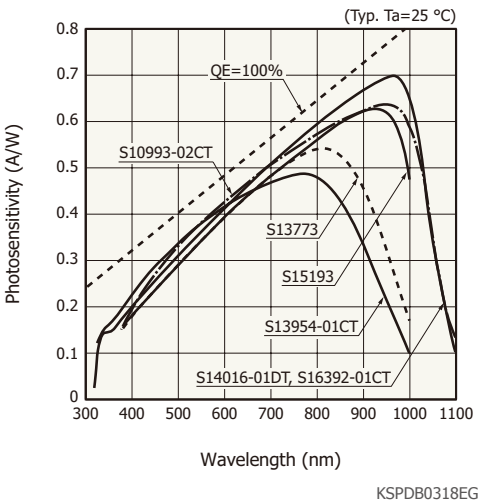

Si photodiodes with preamp


These are low noise photosensors incorporating a large area Si photodiode, preamp and feedback capacitor.

(Typ. Ta=25 °C)


Type no.	Cooling temperature ΔT (°C)	Photosensitive area (mm)	Spectral response range (nm)	Photosensitivity (V/nW)		Noise equivalent power $\lambda=\lambda_p$, $f=10\text{ Hz}$ (fW/Hz ^{1/2})	Built-in feedback resistance (GΩ)	Package	Photo
				$\lambda=200\text{ nm}$	$\lambda=960\text{ nm}$				
S8745-01*	Non-cooled	2.4 × 2.4	190 to 1100	0.12	0.52	11	1	TO-5	
S8745-06			340 to 1100	-	0.6	8			
S8746-01*		5.8 × 5.8	190 to 1100	0.12	0.52	15		TO-8	
S9295*	50	10 × 10	190 to 1100	0.9	5.1	4	10	Metal	
S9295-01*	30					5			

* Refer to "Precautions against UV light exposure ([P.45](#))."


● Noise equivalent power vs. frequency [S8745-01]

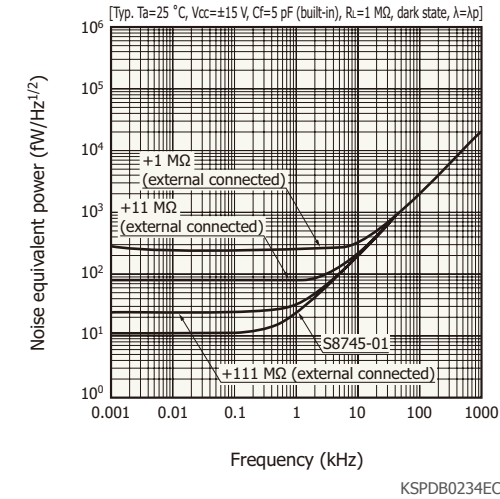


[S8745-06]

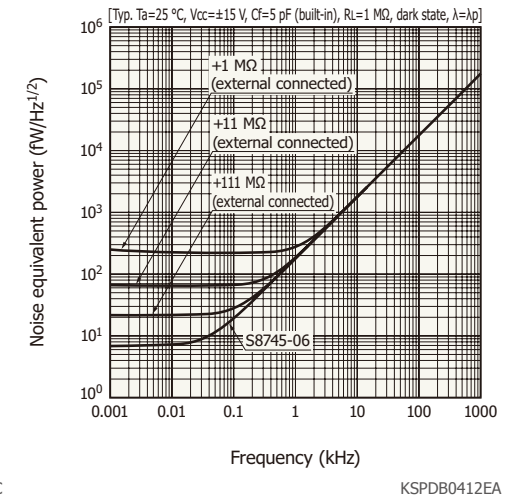

[S8746-01]

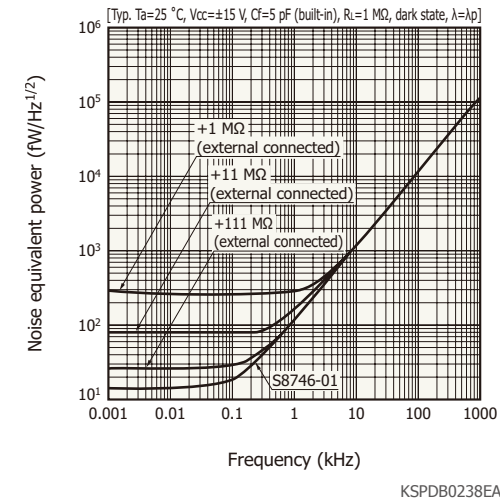


[S9295 series]

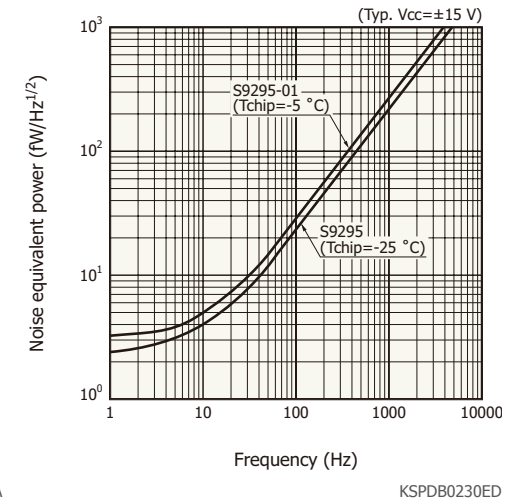

TE-cooled type Si photodiodes


These photosensors combine a UV to near infrared Si photodiode with a TE-cooler and deliver low dark current.

(Typ. Ta=25 °C)

Type no.	Cooling temperature ΔT (°C)	Photosensitive area (mm)	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Dark current VR=10 mV (pA)	Noise equivalent power (W/Hz ^{1/2})	Package	Photo
S2592-03*	35	2.4 × 2.4	190 to 1100	960	10	8.1×10^{-15}	TO-8	
S2592-04*		5.8 × 5.8			25	1.3×10^{-14}		

* Refer to “Precautions against UV light exposure ([P.45](#)).”

● Spectral response

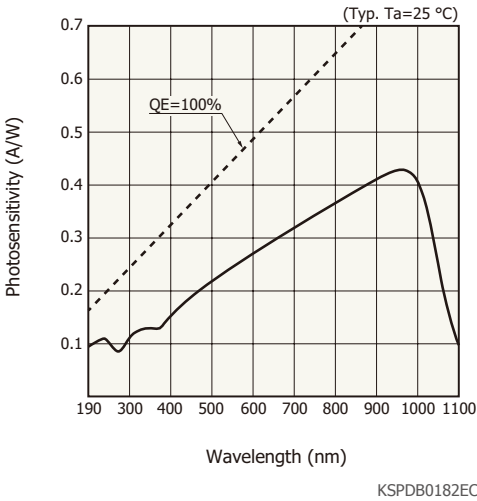

Si photodiodes with scintillator

GOS ceramic scintillators realize high reliability and 1.2 times higher sensitivity compared to CWO. CsI realizes high sensitivity and low cost.



● Emission spectrum of scintillator and spectral response
[S12858/S12859-122]

(Typ. Ta=25 °C)

Type no.	Scintillator	Number of elements	Element pitch (mm)	Element size W × H (mm)	Dark current max. VR=10 mV (pA)	X-ray sensitivity*1 (nA)	Package	Photo
S8559	CsI(Tl)	1	-	5.8 × 5.8	50	52	Ceramic	
S8193	GOS ceramic					30		
S12858-122 *2	CsI(Tl)	16	1.17	0.77 × 2.5	30	5.0	Glass epoxy	
S12859-122 *2								
S12858-324 *2	GOS ceramic					2.5		
S12859-324 *2								
S12858-422 *2	Phosphor sheet					2.2		
S12859-422 *2								

*1: Reference value (X-ray tube voltage: 120 kV, tube current: 1.0 mA, aluminum filter: t=6 mm, distance: 830 mm), The X-ray sensitivity value depends on conditions such as the equipment.

*2: These are back-illuminated types, so they have a high reliability structure with no wires on the incident surface side. They realize superb sensitivity uniformity more than our previous products.

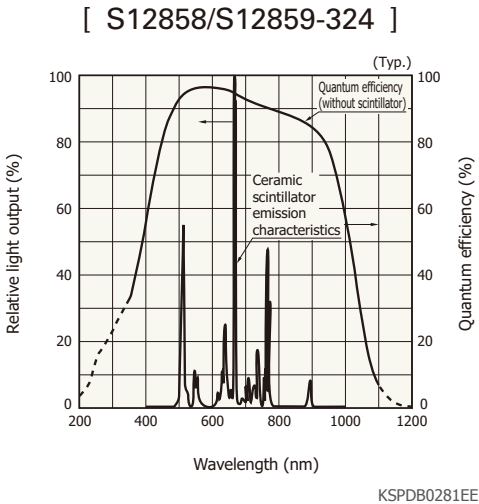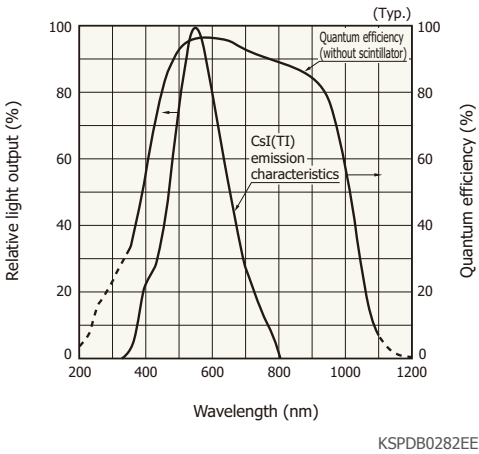

Si photodiodes with scintillator

These are back-illuminated types, so they have a high reliability structure with no wires on the incident surface side. They realize superb sensitivity uniformity more than our previous products.



(Typ. Ta=25 °C)

Type no.	Scintillator	Number of elements	Element pitch (mm)	Element size W × H (mm)	Dark current max. VR=10 mV (pA)	X-ray sensitivity* (nA)	Package	Photo
S11299-121	CsI(Tl)	16	1.575	1.175 × 2.0	30	6.0	Glass epoxy	
S11212-121								
S11299-321	GOS ceramic					3.5		
S11212-321								
S11299-422	Phosphor sheet					3.0		
S11212-422								
S12362-121	CsI(Tl)	16	2.5	2.2 × 2.7	50	12.5	Glass epoxy	
S12363-121								
S12362-321	GOS ceramic					7.2		
S12363-321								
S12362-421	Phosphor sheet					6.0		
S12363-421								

* Reference value (X-ray tube voltage: 120 kV, tube current: 1.0 mA, aluminum filter: t=6 mm, distance: 830 mm)
The X-ray sensitivity value depends on conditions such as the equipment.


Emission spectrum of scintillator and spectral response

[S11299/S11212/S12362/S12363-121] [S11299/S11212/S12362/S12363-321]

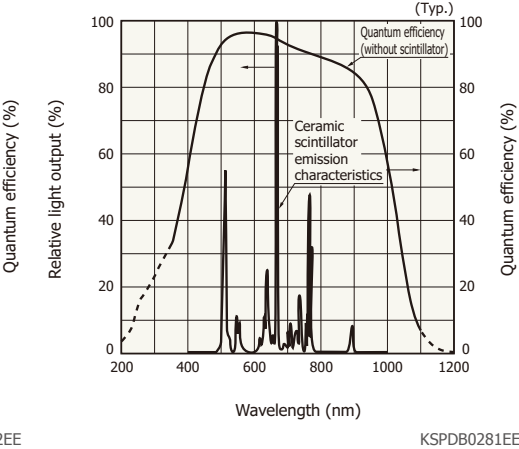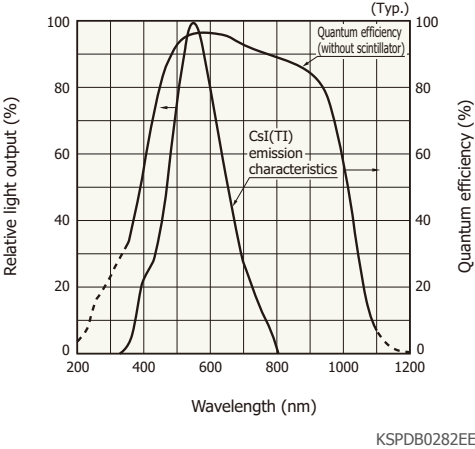

Sensitivity uniformity

[S11212/S11299 series]

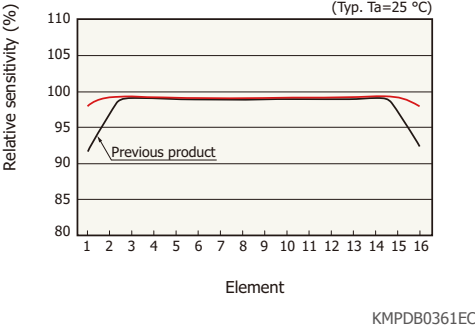


Large-area Si PIN photodiodes

These are photosensors for high energy physics, mainly used with a scintillator being coupled. The S3590-18/19 are violet sensitivity enhanced type and the S3590-19 is an unsealed type. The S8650 is a type in which the epoxy resin surface is processed flat to improve coupling with the scintillator.


(Typ. Ta=25 °C)

Type no.	Window material	Photosensitive area (mm)	Depletion layer thickness VR=70 V (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Dark current max. VR=70 V (nA)	Terminal capacitance VR=70 V, f=1 MHz (pF)	Package	Photo
S3590-08	Epoxy resin	10 × 10	0.3	340 to 1100	0.66	6	40	Ceramic	
S3590-09	None								
S3590-18	Epoxy resin				0.65	10			
S3590-19	None				0.58				
S8650	Epoxy resin					0.66			6

● Spectral response [S3590-08, S3590-09, S8650]



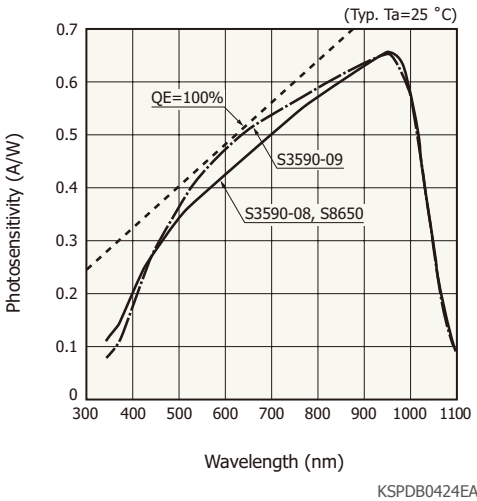



[S3590-18/-19]

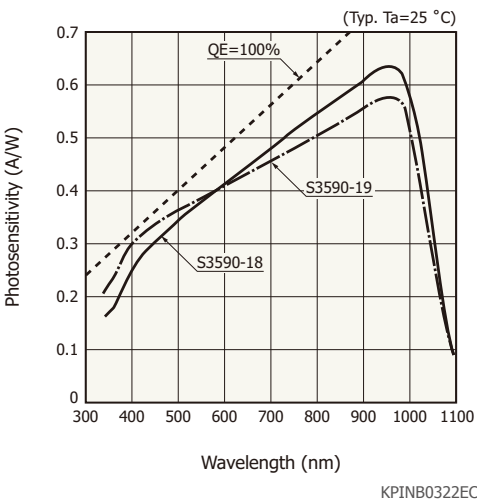

Large-area Si PIN photodiodes

These are photosensors for high energy physics, mainly used with a scintillator being coupled. A long and narrow shape type is also available.

(Typ. Ta=25 °C)									
Type no.	Window material	Photosensitive area (mm)	Depletion layer thickness VR=70 V (mm)	Spectral response range (nm)	Photosensitivity λ=960 nm (A/W)	Dark current max. VR=70 V (nA)	Terminal capacitance VR=70 V, f=1 MHz (pF)	Package	Photo
S2744-08	Epoxy resin	10 × 20	0.3	340 to 1100	0.66	10	85	Ceramic	
S2744-09	None								
S3204-08	Epoxy resin	18 × 18				20	130		
S3204-09	None								
S3584-08	Epoxy resin	28 × 28				30	300		
S3584-09	None								
S3588-08	Epoxy resin	3 × 30				10	40		
S3588-09	None								

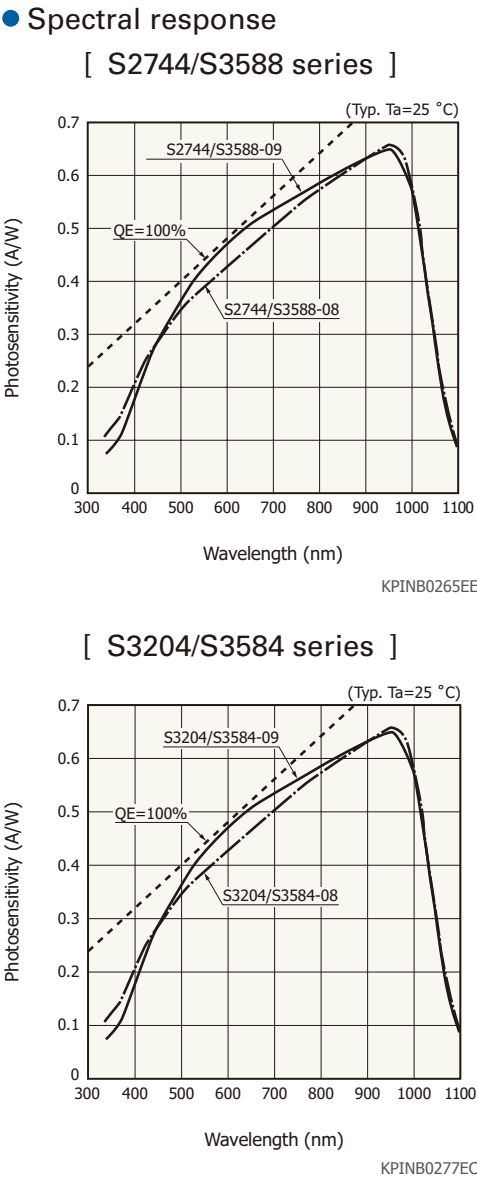

Large area Si PIN photodiodes for direct radiation detection


These are unsealed type large-area Si PIN photodiodes for direct radiation detection. They can detect high-energy radiation with high efficiency.

(Typ. Ta=25 °C)

Type no.	Window material	Photosensitive area (mm)	Depletion layer thickness (mm)	X-ray energy max. (keV)	Dark current max. (nA)	Package	Photo
S13993 *	None	10 × 10	0.3	50	6	Ceramic	
S14605		9 × 9	0.5		30		

* Photosensitive area: Al coated

• Photosensitivity vs. X-ray energy (theoretical value)

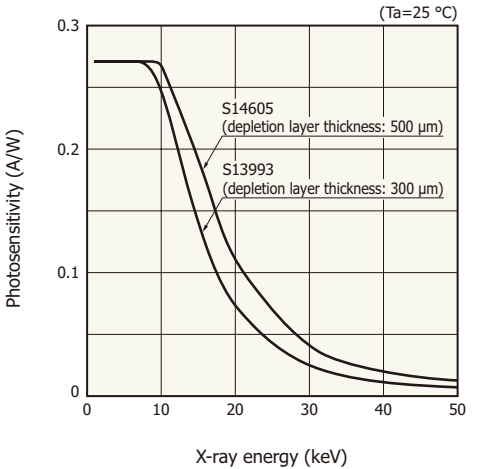


KPINB0441EA

RGB color sensors

These are three-color sensors in one package, containing photodiodes, each of which is sensitive to one of blue, green, or red.

(Typ. Ta=25 °C)


Type no.	Spectral response range		Peak spectral response	Photosensitivity $\lambda=\lambda_p$		Dark current $V_R=1\text{ V}$ Total value of all elements max.	Photosensitive area		Package	Photo
	(nm)		(nm)	(A/W)		(pA)	(mm)			
S7505-01	Blue	400 to 540	460	Blue	0.18	200	Blue	$1.5 \times 1.5 (\times 2)$	Plastic	
	Green	480 to 600	540	Green	0.23		Green	1.5×1.5		
	Red	590 to 720	620	Red	0.16		Red	1.5×1.5		
S9032-02 *1	Blue	400 to 540	460	Blue	0.18	100	$\phi 2/3$ -segment		Plastic	
	Green	480 to 600	540	Green	0.23					
	Red	590 to 720	620	Red	0.16					
S9702 *1	Blue	400 to 540	460	Blue	0.18	50	$1 \times 1/3$ -segment		Plastic	
	Green	480 to 600	540	Green	0.23					
	Red	590 to 720	620	Red	0.16					
S10917-35GT	Blue	390 to 530	460	Blue	0.2	50	$1 \times 1/3$ -segment		Glass epoxy	
	Green	470 to 600	540	Green	0.23					
	Red	590 to 680	620	Red	0.17					
S10942-01CT	Refer to the spectral response.			Blue	0.21^{*2}	50	$1 \times 1/3$ -segment		Glass epoxy	
				Green	0.25^{*2}					
				Red	0.45^{*2}					

*1: There is a risk that the glass filter may fall off if there are excessive forces or continuous vibration. Please secure the glass filter with a holder and the like.


*2: Blue: $\lambda=460\text{ nm}$, green: $\lambda=540\text{ nm}$, red: $\lambda=640\text{ nm}$

● Spectral response


[S7505-01, S9032-02, S9702]

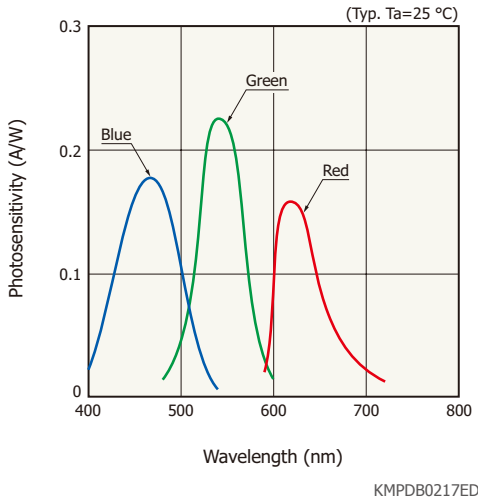

[S10917-35GT]

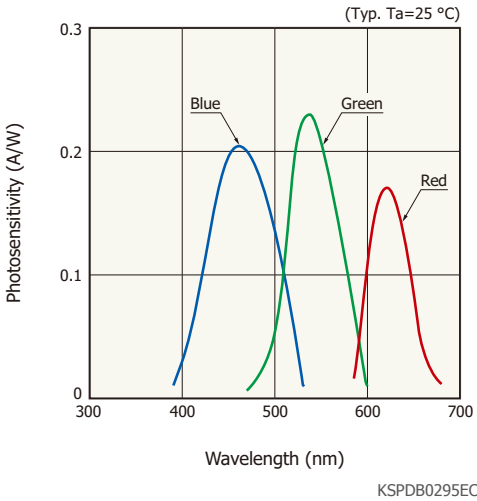

[S10942-01CT]



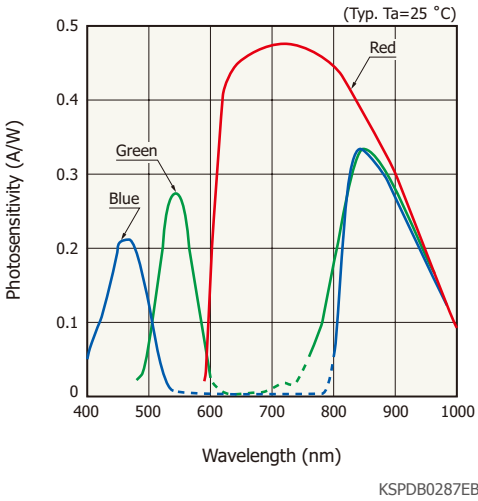


This sensor also has sensitivity in the infrared region, so cut off infrared light as needed.


RGB color sensors

The S6428-01, S6429-01 and S6430-01 are monochromatic color sensors sensitive to blue, green and red light, respectively.

(Typ. Ta=25 °C)

Type no.	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=\lambda_p$ (A/W)	Dark current $V_R=1\text{ V}$ max. (pA)	Photosensitive area (mm)	Package	Photo
S6428-01	400 to 540	460	0.22	20	2.4 × 2.8	Plastic	
S6429-01	480 to 600	540	0.27				
S6430-01	590 to 720	660	0.45				

● Spectral response

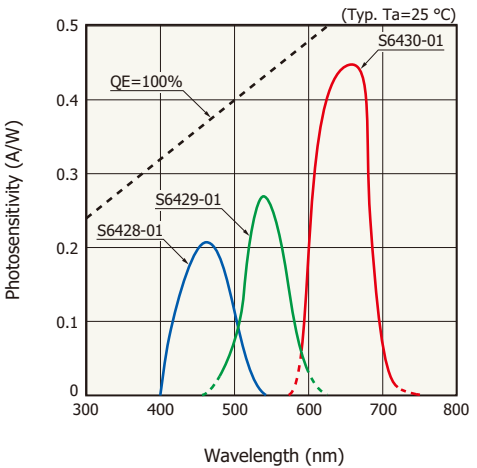

KSPDB0280ED

Violet and blue sensitivity enhanced type


These are photodiodes for violet and blue laser diode detection.

(Typ. Ta=25 °C)


Type no.	Cutoff frequency (MHz)	Photosensitive area (mm)	Peak sensitivity wavelength (nm)	Photosensitivity (A/W)	Dark current max. (nA)	Terminal capacitance f=1 MHz (pF)	Package	Photo
S5973-02	1 GHz (VR=3.3 V)	φ0.4	760	0.3 (λ=410 nm)	0.1 (VR=3.3 V)	1.6 (VR=3.3 V)	TO-18	
S9195	50 (VR=10 V)	5 × 5	840	0.28 (λ=405 nm)	5 (VR=10 V)	60 (VR=10 V)	TO-8	
S3994-01	20 (VR=30 V)	10 × 10	960	0.25 (λ=400 nm)	10 (VR=30 V)	40 (VR=30 V)	Ceramic	

● Spectral response

[S5973-02, S9195]

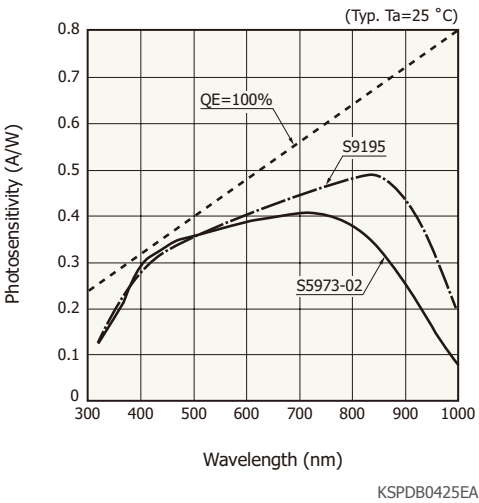



[S3994-01]

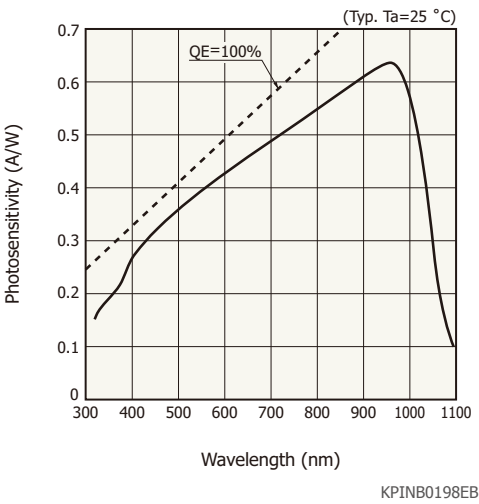

For vacuum ultraviolet (VUV)

For monitoring

They have sensitivity in the vacuum ultraviolet region and are especially suitable for excimer laser (ArF: 193 nm, KrF: 248 nm) monitor. (Typ. Ta=25 °C)

Type no.	Photosensitivity $\lambda=193\text{ nm}$ (A/W)	Dark current $V_R=10\text{ mV}$ max. (nA)	Photosensitive area (mm)	Package	Photo
S8552*	0.06	1.0	10 × 10	Ceramic (unsealed)	
S8553*		5.0	18 × 18		



High reliability type

This is greatly improved in sensitivity stability even after exposure to ArF excimer laser. (Typ. Ta=25 °C)

Type no.	Photosensitivity $\lambda=193\text{ nm}$ (A/W)	Dark current $V_R=10\text{ mV}$ max. (nA)	Photosensitive area (mm)	Package	Photo
S10043*	0.015	1.0	10 × 10	Ceramic (unsealed)	

* Refer to “Precautions against UV light exposure ① (P.45).”

Spectral response

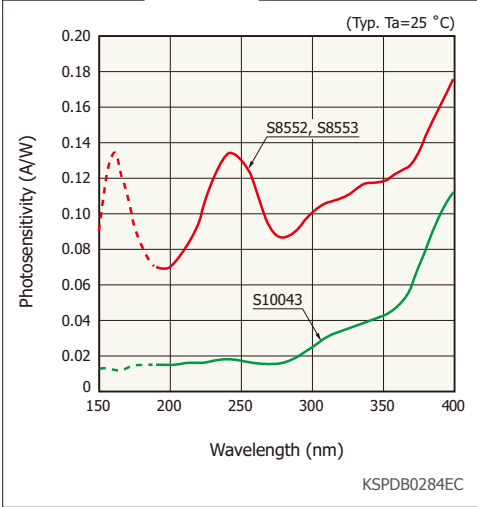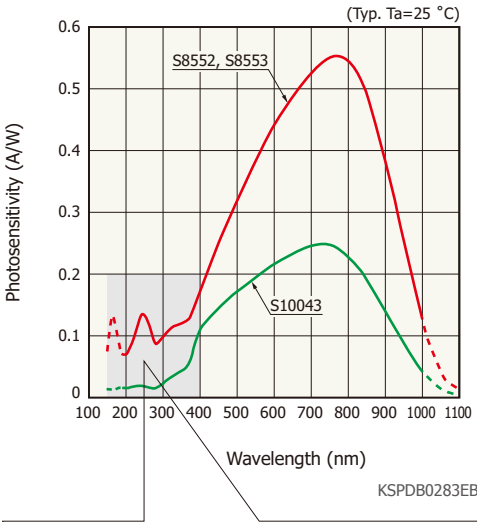

For monochromatic light detection


This photosensor uses an interference filter and has high sensitivity only to monochromatic light.

(Typ. Ta=25 °C)

Type no.	Center wavelength (nm)	Spectral response half width (nm)	Photosensitivity λ=center wavelength (mA/W)	Dark current VR=10 mV max. (pA)	Photosensitive area (mm)	Package	Photo
S12742-220*	220	10	6	25	3.61 × 3.61	TO-5	
S12742-254*	254		18				
S12742-275*	275		10				
S16014-220*	220		6			TO-18	
S16495* NEW	310	15	13	10	1.1 × 1.1	Ceramic	

* Refer to “Precautions against UV light exposure ([P.45](#)).”

Spectral response

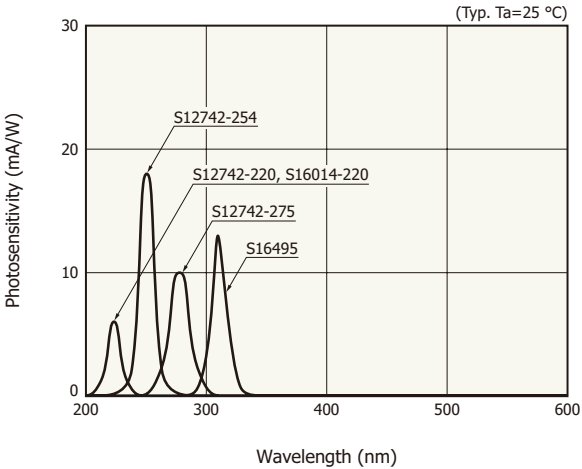

KSPDB0390EC

Note: We also offer other wavelength types, such as center wavelength 340 nm or 560 nm (made-to-order products).


For YAG laser detection

This is a Si PIN photodiode developed for YAG lasers (1.06 μm).

(Typ. Ta=25 °C)


Type no.	Photosensitive area (mm)	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=1060\text{ nm}$ (A/W)	Dark current $V_R=100\text{ V}$ max. (nA)	Cutoff frequency $V_R=100\text{ V}$ (MHz)	Rise time $\lambda=1060\text{ nm}$ $V_R=100\text{ V}$, $R_L=50\text{ }\Omega$ (ns)	Package	Photo
S15137	$\phi 5$	360 to 1120	1000	0.52	10	28	12.5	TO-8	
S17348 NEW	$\phi 3$	360 to 1120	940	0.37	10	120	-	TO-5	

Spectral response

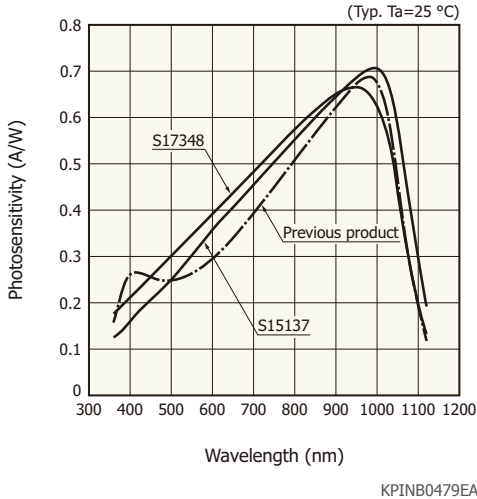

Response waveform


[S15137]

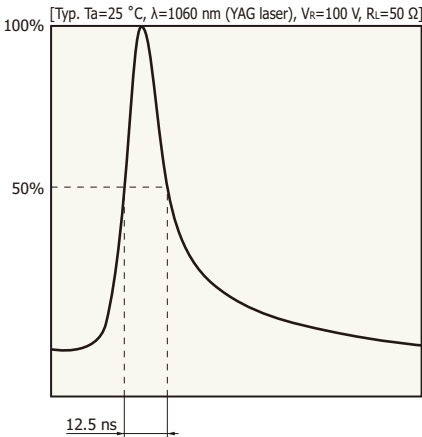

For electron beam detection


These photodiodes directly detect low energy (1 keV or more) electron beams with high sensitivity. The structure with an extremely thin dead layer (insensitive layer) makes these photodiodes suitable for backscattered electron detection for scanning electron microscope (SEM).

(Typ. Ta=25 °C)


Type no.	Incident electron energy range (keV)	Output current (nA)	Dark current VR=5 V max. (nA)	Terminal capacitance VR=5 V (pF)	Cutoff frequency VR=5 V (MHz)	Electron multiplying gain	Package	Photo
S11141-10	1 to 30	30 (Electron energy 1.5 keV Ip*=100 pA)	60	450	2.5	300 (Electron energy 1.5 keV)	Thin ceramic (unsealed)	
S11142-10				200	5			

* Probe current

Gain vs. electron energy

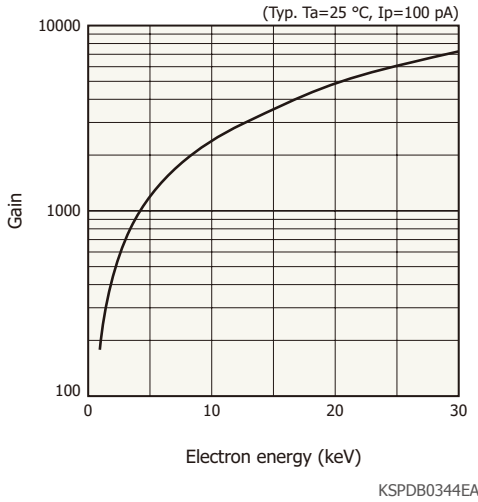

Electron multiplication principle

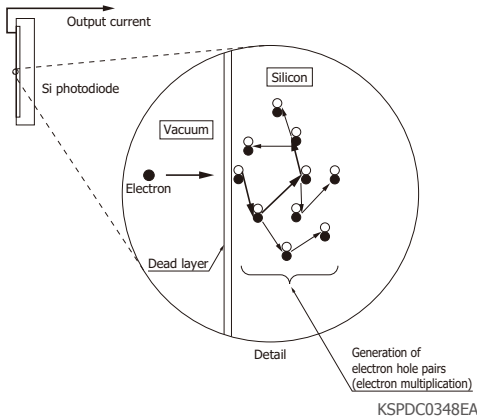

Ionization occurs in silicon as electrons pass through the silicon. This ionization process generates a large number of electron-hole pairs that then multiply the number of electrons. The electron multiplication can boost the output current by approximately 300 times at an input electron energy of 1.5 keV


PWB package type with leads

These are Si photodiodes suitable for non-destructive inspection of baggage and the like and general industrial measurement. As they are back-illuminated photodiodes, photosensitive area does not have wires, and therefore a scintillator can be mounted directly on the photodiode.

(Typ. Ta=25 °C)

Type no.	Photosensitive area (mm)	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity λ=920 nm (A/W)	Short circuit current 100 lx 2856 K (μA)	Terminal capacitance VR=0 V f=10 kHz (pF)	Photo
S12497	9.5 × 9.5	400 to 1100	920	0.57	75	950	
S12498	6 × 6				30	380	

● Spectral response

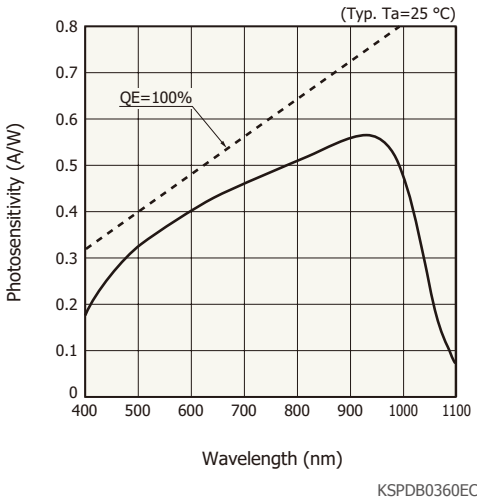

CSP type

Single element

These are back-illuminated photodiodes employing a CSP (chip size package) that allows direct coupling of a scintillator on the chip. They are designed with minimal dead space around the product. This makes it possible to arrange multiple products in a tiled format. (Typ. Ta=25 °C)

Type no.	Photosensitive area (mm)	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity $\lambda=920\text{ nm}$ (A/W)	Short circuit current 100 lx 2856 K (μA)	Terminal capacitance $V_R=0\text{ V}$ $f=10\text{ kHz}$ (pF)	Package	Photo
S13955-01	7.37 × 7.37	400 to 1100	960	0.61	46	500	Glass epoxy (unsealed)	
S13956-01	2.5 × 2.5				5.5	60		
S13957-01	4.5 × 4.5				22	230		


64-element Si photodiode array

This is an 8 × 8 element Si photodiode array with a back-illuminated structure for X-ray non-destructive inspection. A scintillator can be directly coupled on the chip. (Typ. Ta=25 °C)

Type no.	Number of elements	Element pitch (mm)	Element size W × H (mm)	Spectral response range (nm)	Peak spectral response (nm)	Photosensitivity $\lambda=920\text{ nm}$ (A/W)	Short circuit current 100 lx 2856 K (μA)	Terminal capacitance $V_R=0\text{ V}$ $f=10\text{ kHz}$ (pF)	Package	Photo
S13620-02	64 (8 × 8)	3.0	2.5 × 2.5	400 to 1100	960	0.61	5.5	60	Glass epoxy (unsealed)	

Spectral response

[S13955/S13956/S13957-01,
S13620-02]

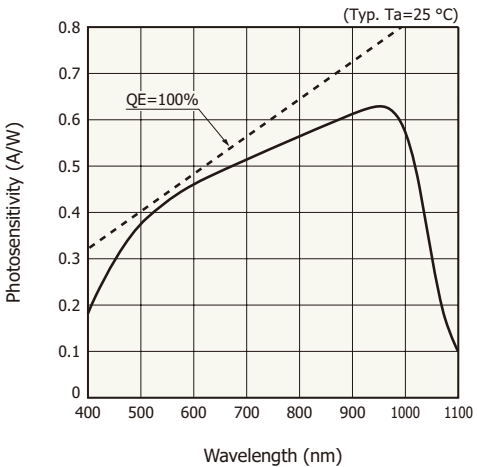


KSPDB0367EB


6-element array for encoder

This is a surface mount type 6-element Si PIN photodiode. The 6 elements are separated, so this product is suitable for incremental encoders.

(Typ. Ta=25 °C)

Type no.	Number of elements	Element size W × H (mm)	Spectral response range (nm)	Peak sensitivity wavelength (nm)	Photosensitivity λ=960 nm (A/W)	Terminal capacitance VR=10 V f=10 kHz (pF)	Package	Photo
S14833	6	2.76 × 1.37	340 to 1100	960	0.68	9	Glass epoxy	

Spectral response

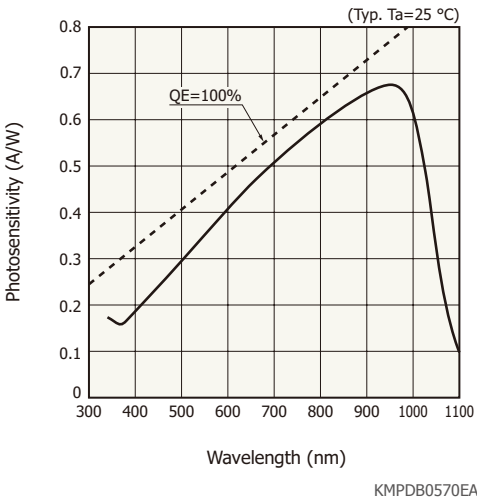

Related products

Product name	Overview	Type no.	Photo
Color sensor evaluation circuit	Evaluation board of Hamamatsu color sensor	C9331	
Photodiode module	High-precision photodetectors that integrate a photodiode and I/V amplifier	C10439 series	
PSD module	A high-precision position sensitive module with a 4-segment photodiode and a low-noise amplifier	C10443 series	

Product name		Overview	Type no.	Photo
Photosensor amplifier	For low-level light	Digital output function, current-to-voltage conversion amplifier with low noise	C9329-01	
	With optical fiber	Optical fiber compatible, optical-to-voltage conversion amplifier (with built-in photosensor)	C6386-01	
	High-speed type	High speed, current-to-voltage conversion amplifier	C8366 series	
	Compact board type	Current-to-voltage conversion amplifier for low-level light, made easy to incorporate	C9051-01	

Related information

Precautions

- [Disclaimer](#)
- [Metal, ceramic, plastic package products](#)
- [Surface mount type products](#)
- [Unsealed products](#)
- Precautions against UV light exposure

① When UV light irradiation is applied, the product characteristics may degrade. Such examples include degradation of the product's UV sensitivity and increase in dark current. This phenomenon varies depending on the irradiation level, irradiation intensity, usage time, and ambient environment and also varies depending on the product model. Before employing the product, we recommend that you check the tolerance under the ultraviolet light environment that the product will be used in.

② Exposure to UV light may cause the characteristics to degrade due to gas released from the resin bonding the product's component materials. As such, we recommend that you avoid applying UV light directly on the resin and apply it on only the inside of the photosensitive area by using an aperture or the like.

Technical notes

- [Si photodiodes](#)
- [X-ray detectors](#)
- [Si detectors for high energy particles](#)

● [Inquiries from online](#)

www.hamamatsu.com

- Information described in this material is current as of September 2025.
- Product specifications are subject to change without prior notice due to improvements or other reasons. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

HAMAMATSU PHOTONICS K.K.

KSPD0001E23 Sep. 2025 DN

Optical Semiconductor Sales, HAMAMATSU PHOTONICS K.K.

1126-1 Ichino-cho, Chuo-ku, Hamamatsu City, Shizuoka Pref., 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19 Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35, 16440 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201, Tower B, Jiaming Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 13F-1, No.101, Section 2, Gongdao 5th Road, East Dist., Hsinchu City, 300046, Taiwan (R.O.C) Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

Korea: HAMAMATSU PHOTONICS KOREA CO., LTD.: A-912, 167, Songpa-daero, Seoul, 05855, Korea, Telephone: (82)2-2054-8202, Fax: (82)2-2054-8207 E-mail: sales@hpkcr.co.kr