



ENVIROMAT® GREEN ROOF EDGING

■ PRODUCT ORDER CODE

SUND-REDGE100MM
SUND-REDGE50MM
SUND-REDGE100CO
SUND-REDGE50CO

Roof edging 100mm face
Roof edging 50mm face
Roof edging 100mm connector
Roof edging 50mm connector

■ STANDARD LENGTH

1000mm

■ FACE HEIGHT

Available in 50mm or 100mm
This product is supplied as a single piece
Thickness: 1.2mm
All measurements are approximate.

■ DETAILS

Lightweight aluminium edging. Available in two face heights to suit our range of living roof products. 33 laser cut slots per metre allow the free draining of water, whilst retaining pebbles or substrate. The base on both versions is 100mm wide using the weight of the green roof system or pebbles to hold it in place.

The aluminium finish is both durable, rust resistant and lightweight making installation easy. The matching connectors also feature the same laser cut slots for both drainage and aesthetics. The connectors can be used for straight joints or bent easily to form internal or external angles.

For added strength, 9 laser cut holes in the base enable firm bonding when required.


■ USES

Living roof edge restraint.
Separating substrates.
Green roof edge restraint.

**A LIGHTWEIGHT
ALUMINIUM ROOF
EDGING SUITABLE FOR
A RANGE OF
APPLICATIONS.**

FEATURES

Lightweight and durable.
Weather resistant.
Easy to install and cut.
Available in 2 sizes to cover all applications.
Connectors can be used for straight or angle joints.
Maximum drainage without compromising strength.

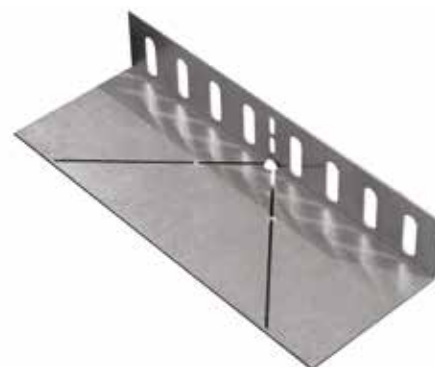

Important - We recommend wearing gloves when handling or installing this product.