

ELATECH[®] polyurethane belts with profiles

It is possible to attach profiles on all ELATECH[®] M and V, ELA-flex SD[®] and iSync[®] polyurethane belts for conveying, handling and positioning applications. The cleats are produced in the same material of the belts in order to guarantee the maximum strength.



Pitch

It is recommended to choose the pitch of the profile corresponding to the belt profile or multiple. This allows to minimize the effects of the belt overall length tolerance on profile spacing.

Position

Profile position may be over the tooth or not over the tooth. Belt flexibility is maximized when the profiles are applied over the tooth.

Fig.1






Fig.2



The belts with profiles allow a synchronised translation of the products at very high speeds and low noise. A very wide range of profiles is available. If the required profile is not shown in the following pages, please contact our technical office.

Arc of contact

It is to be noted that the belt's arc of contact may be restricted by the jointed profile. It is therefore recommended to select profiles with the minimum allowable thickness "U".



Tolerances

The tolerance of position of the profiles is $\pm 0,5$ mm. If required it is possible to reduce the tolerance down to $\pm 0,2$ mm with an extra machining. During the welding process a bead of polyurethane of about 0,5-1 mm develops at the meeting point between the profile and the belt. Should it be necessary for the application, it is possible to remove the bead with mechanical machining.

Belt type	Profile thickness "U" [mm]																							
	2		3		5		6		8		10		12		14		16		20		25		30	
	Recommended minimum pulley number of teeth z																							
T5	14	20	14	30	20	45	25	50	40	60	60	100	80	-	100	-	-	-	-	-	-	-	-	-
T10	16	20	16	20	16	30	16	40	20	50	25	50	35	60	50	70	80	80	100	100	120	120	-	-
T20	20	20	18	20	18	25	18	40	18	50	20	50	25	50	30	60	40	60	50	60	70	80	-	-
AT5	12	20	12	30	20	45	25	50	40	60	60	100	-	-	100	-	-	-	-	-	-	-	-	-
AT10	18	20	18	20	18	30	18	40	20	50	25	50	35	60	50	70	80	80	100	100	120	120	-	-
AT20	20	20	20	20	20	25	20	40	20	50	20	50	25	50	40	40	50	50	50	60	70	80	100	100
XL	10	20	10	30	20	45	25	50	40	60	50	100	60	100	-	-	-	-	-	-	-	-	-	-
L	12	16	12	20	12	40	20	50	30	60	40	60	50	70	60	80	100	100	-	-	-	-	-	-
H	14	16	14	16	14	25	14	30	20	50	25	50	40	60	50	70	80	80	100	100	120	120	-	-
XH	18	18	18	20	18	20	18	30	18	40	20	50	20	50	25	55	35	60	50	60	70	80	-	-
HTD5M	12	20	12	30	20	45	25	50	40	60	60	100	80	-	100	-	-	-	-	-	-	-	-	-
HTD8M	18	18	18	18	18	24	18	32	18	40	20	40	28	48	40	56	64	64	80	80	100	100	-	-
HTD14M	28	28	28	28	28	28	28	40	28	50	28	50	28	50	30	60	40	50	50	60	100	100	110	110
STD5M	12	20	12	30	20	45	25	50	40	60	60	100	80	-	100	-	-	-	-	-	-	-	-	-
STD8M	18	18	18	18	18	24	18	32	18	40	20	40	28	48	40	56	64	64	80	80	100	100	-	-

Minimum number of teeth when the profile is welded on tooth gap (fig. 2)

Minimum number of teeth when the profile is welded on tooth (fig. 1)


Ordering

When ordering it is necessary to indicate: type of belt (width, profile, pitch, length), the belt length in number of teeth, the belt and profile drawing with the number and the pitch of the requested profiles.

ELACLEATS

download in CAD or PDF format
the most suitable cleat

Elatech online cleat selection
support at ↓



elatech.com

ELATECH® offers a wide variety of custom-made and standard cleats specially designed for different applications in many industries. ELACLEATS is a web-based tool for quickly selecting among ELATECH® standard cleats by shape, size and features.

2D and 3D drawings can be easily downloaded for the selected cleats.

ALWAYS UP TO DATE

ELACLEATS online version is always up to date with new types and sizes.

› RELIABLE
SOLUTIONS!

FAST AND EASY



ELACLEATS offers an intelligent search for a quick selection of most suitable cleat with an easy to follow menu for fastest navigation.

› SAVE
YOUR TIME!


COMPREHENSIVE RANGE

ELACLEATS offers widest range of cleats to optimize your conveying application.



› IMPROVE
EFFICIENCY!

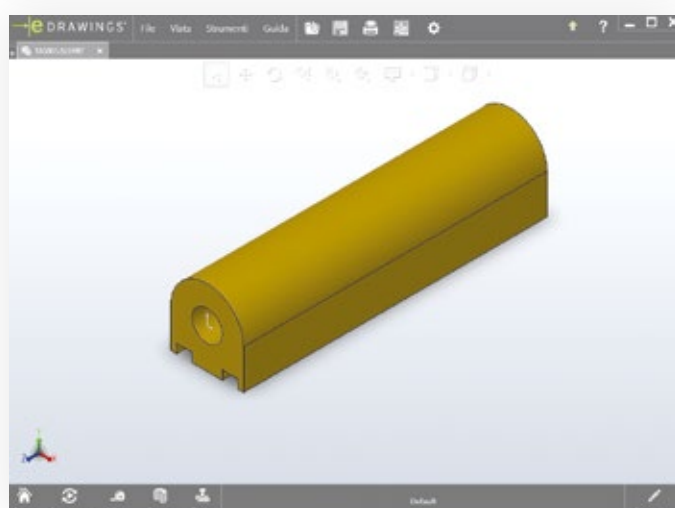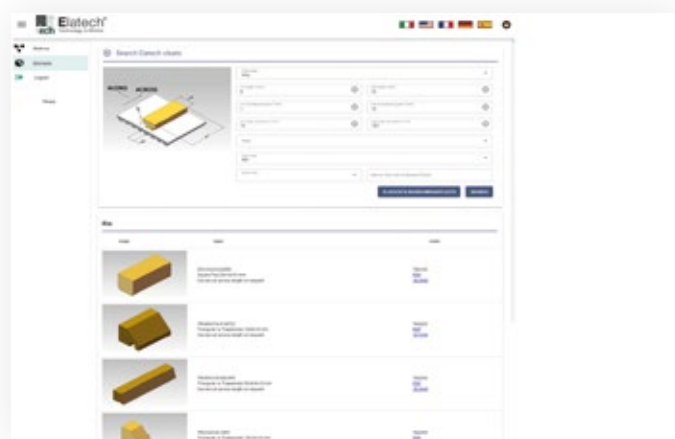



› HUNDREDS OF CLEATS AVAILABLE FOR ALL APPLICATIONS!





ST = Square Top: flat faces at right angles to each other





RT = Round Top: the upper part of the cleat has a rounded shape




TR = Triangular or Trapezoidal: flat faces, some of which are not at right angles to other faces; cross-sections can be triangular, trapezoidal, pentagonal, etc.



TT = "T" Shaped: a portion of the cleat (usually the upper one) is wider than the rest, so that a cross-section resembles the shape of a capital "T"





AN = Angular Shape: two portions of the cleat are set at an angle to each other




GB = Gusset Back: having a fin on one side that is not attached to the belt but rests on it and increases rigidity when the cleat is pushed in one direction



CR = Cradle Shape: "U" or "V" shaped so that an object can rest in the seat created by the sides of the cleat



CY = Cylindrical Shape: a cylinder with vertical or horizontal axis



SP = Special Shape: any other shape, usually a structure especially designed for a specific use

