



RWM 100 Baling Press

Product Specification

 Mid-Range Waste Baler

 **Riverside**

wastemachinery.co.uk

RWM 100 Baling Press

Effortlessly Manage Your Recyclable Packaging Waste

A Riverside vertical baler helps businesses cut disposal costs, free up space, and improve efficiency by compacting recyclable materials like cardboard and plastic. Baling reduces handling time, lowers collection expenses, enhances site safety, and can generate revenue through recycling rebates. It also supports environmental compliance, making waste management simpler, cleaner, and more cost-effective.

Basic Specification



- ✓ 12 month warranty
- ✓ Fitted retaining claws to prevent material spring back
- ✓ Suitable for volume reduction of cardboard and plastic
- ✓ Large feed aperture for easy loading
- ✓ Can be sited outside
- ✓ 13amp single phase electrics
- ✓ 6 tonne press force
- ✓ 4 polyester tape ties per bale
- ✓ Automatic bale ejection
- ✓ Bale weights up to 100kg

Features

- ✓ PLC control panel with bale full light
- ✓ E-Stop with control panel lock off
- ✓ Bale ejection
- ✓ Retainers to prevent material spring back
- ✓ Front mounted baling tape holders for easy access



Technical Specifications

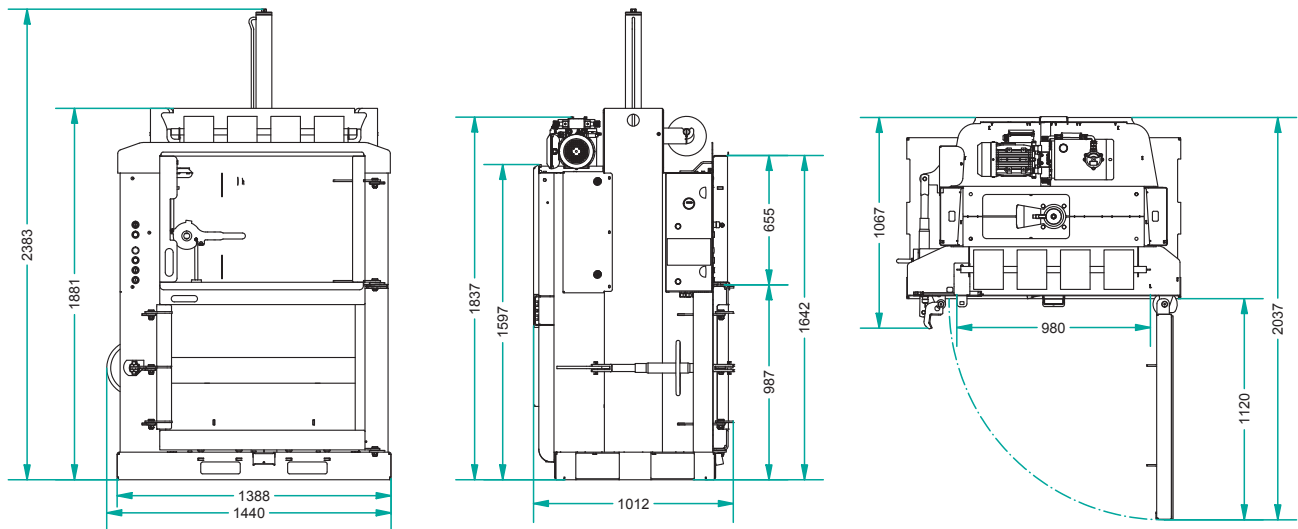

- Operating Voltage: 220–240V
- Frequency: 50Hz
- Connector Plug: 13A, single-phase, standard 3-pin (BS 1363) plug
- MCB (Miniature Circuit Breaker): Type C or above

Press Force	6 tonnes
Loading Aperture (H x W x D)	479 x 980 x 800mm
Bale Weight	Up to 100kg
Bale Dimensions (H x W x D)	847 x 980 x 800mm
Cycle Time	28 seconds
Noise	68 decibels
Machine Weight	632kg
Power Supply (kW-V-Hz)	13amp single phase 1.5kW 220-240V – 50Hz
Overall Dimensions (H x W x D)	2399 x 1440 x 1014mm
Optional Transportation Height	1876mm

Optional Extras

Customise your machine with the optional extras listed below – designed to help you get the most from your equipment, and to suit your specific requirements, operational needs, or site layout.



Galvanised finish
Corrosion-resistant coating for outdoor or harsh, wet environments.



Available in 16amp 3 phase
Supplied in 16amp 3 phase to suit your preferred or existing power supply.