

Designed to meet and exceed the requirements of BBA, ABI, PAS 23 / 24 and the latest CEN European security and performance standards plus cycle tested to BS5872.

The unsprung Lockmaster series uses twin followers to give both front door night latching and standard back door lever / lever action.

Pre-compression rollers are unique to the Lockmaster and ensure smooth action and positive door alignment.

Other features include deadbolt with hardened pins & snib 'latch hold back' facility.

## Nightlatch door locks - unsprung

DEPAD11101SS	35mm backset, 4 roller, rev. latch & deadbolt	silver triklad
DEPAD13101SS	35mm backset, 2 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt	silver triklad
DEPAD13121SS	35mm backset, 2 hook, 2 anti-lift pins, 4 roller, rev. latch & deadbolt	silver triklad
DEPAD14101SS	35mm backset, 4 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt	silver triklad
DEPAD45101SS	35mm backset, 2 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEPAD45121SS	35mm backset, 2 hook, 2 anti-lift pins, 4 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad

## Shoot bolts for extendable models

DEPAD90011SS / 90005SS	2 x shoot bolt extensions incl. keeps	silver triklad
DEPAD90012SS / 90005SS	2 x high security shoot bolt extensions incl. keeps	silver triklad


Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4. The finish is also Chromium hexavalent 6 free, meeting the latest European (*green*) specification. Components plated to BS1706. 1990

**NOTE:** All unsprung door locks require sprung handles sets - see the Door Furniture section of this catalogue

Keeps to suit the D&E lockmaster range - see pages L-1012 to L-1016


CI/SfB		
	31/59	Xt 7
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE

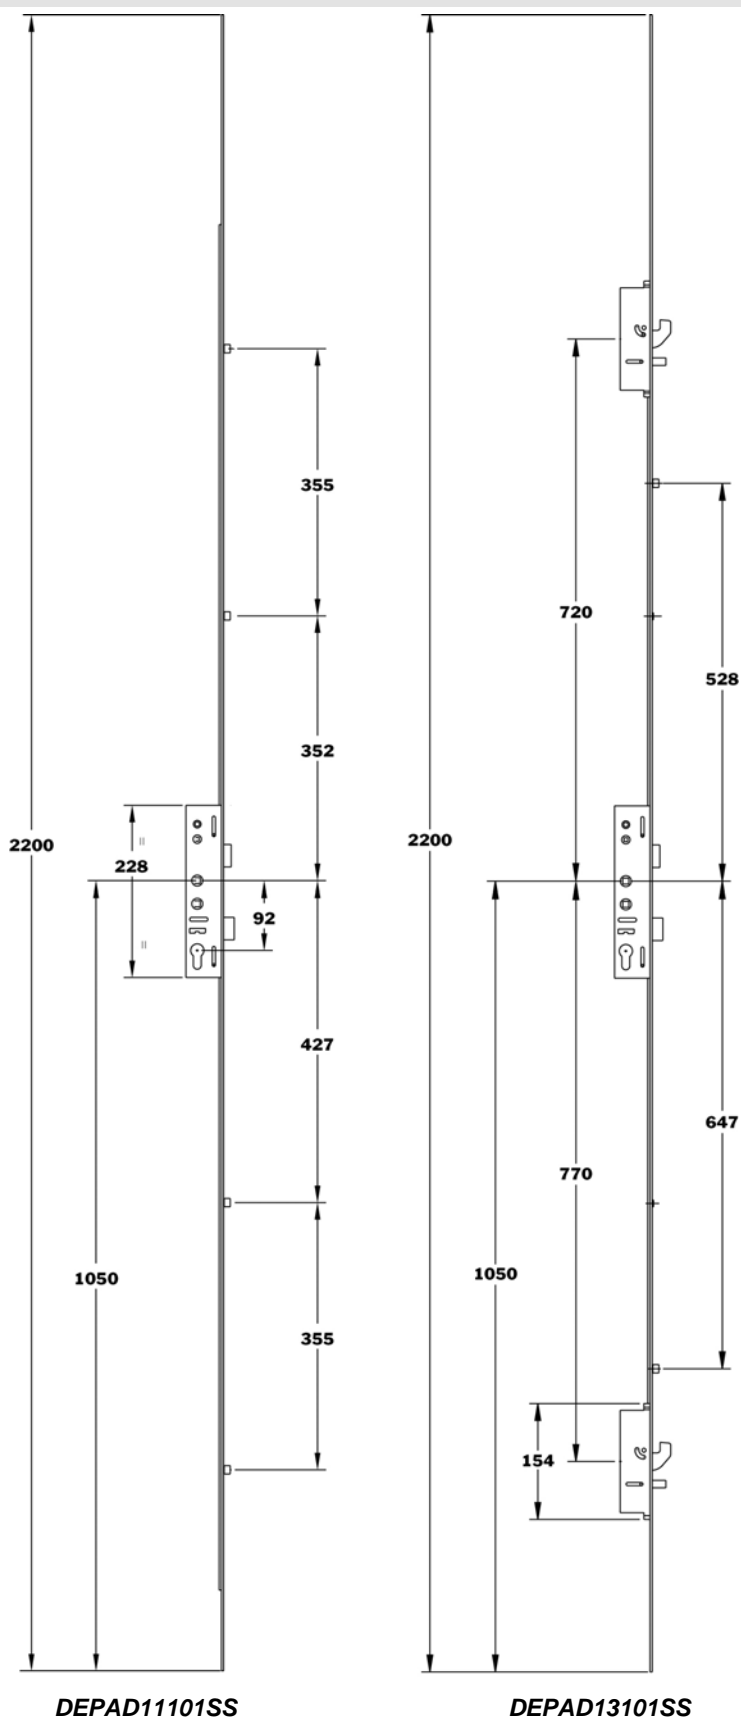


CI/SfB		
	31/59	Xt 7
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE

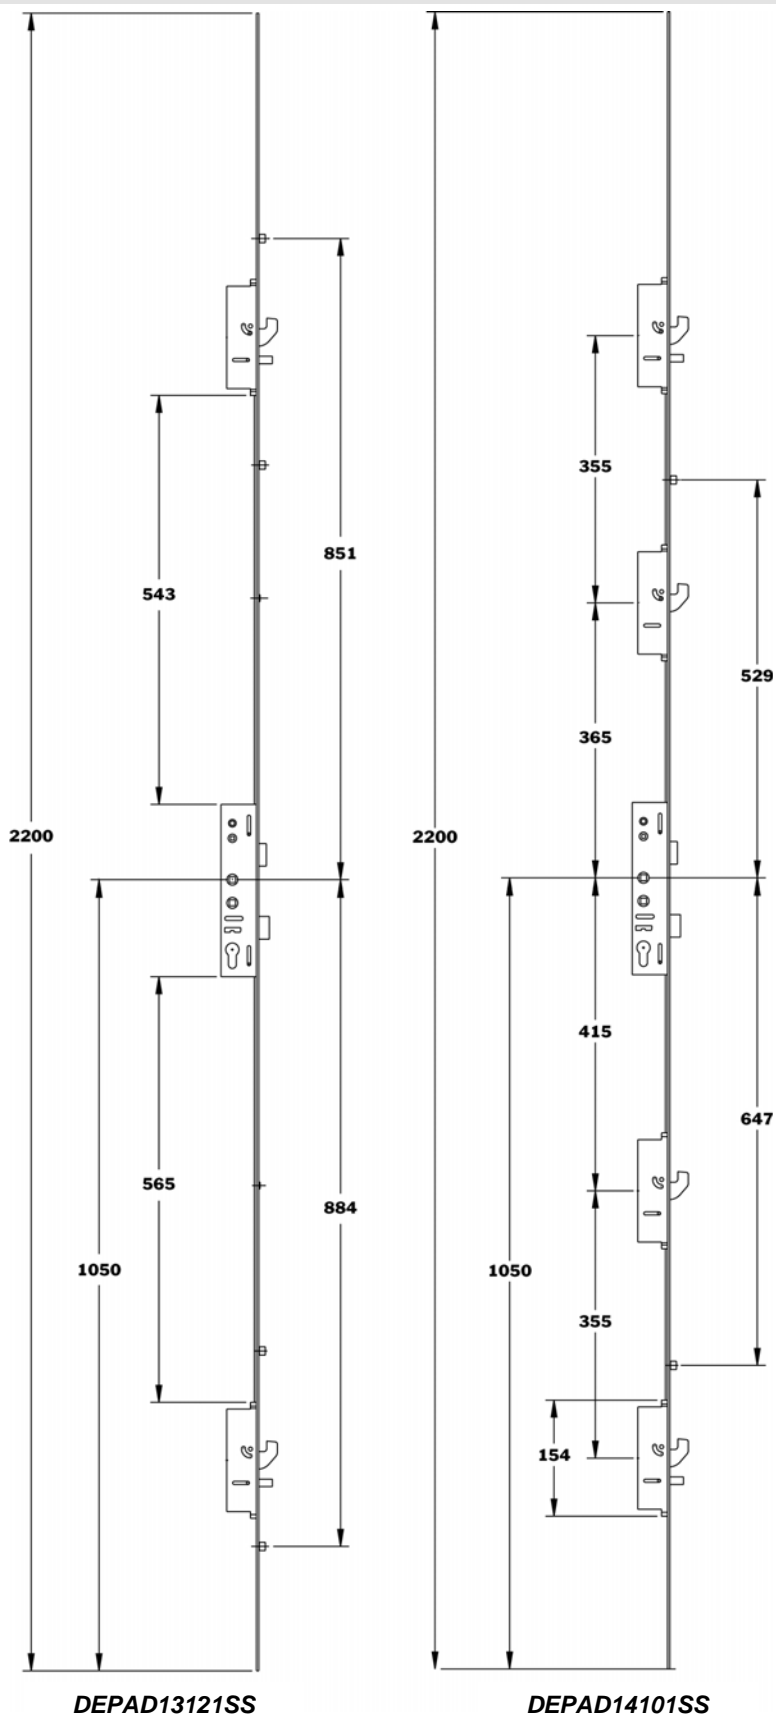


CI/SfB		
31/59	Xt 7	
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE


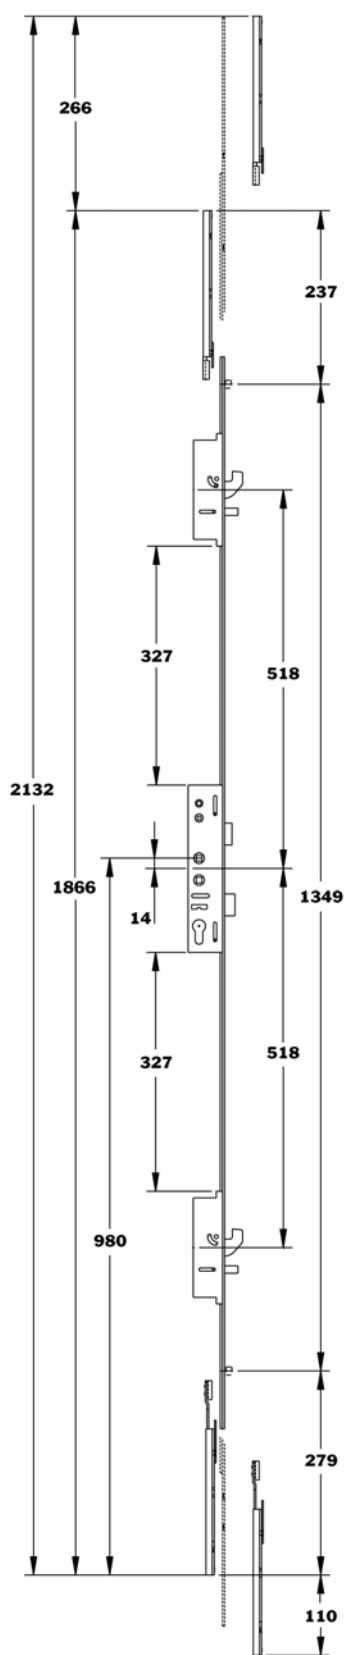


DEPAD45101SS

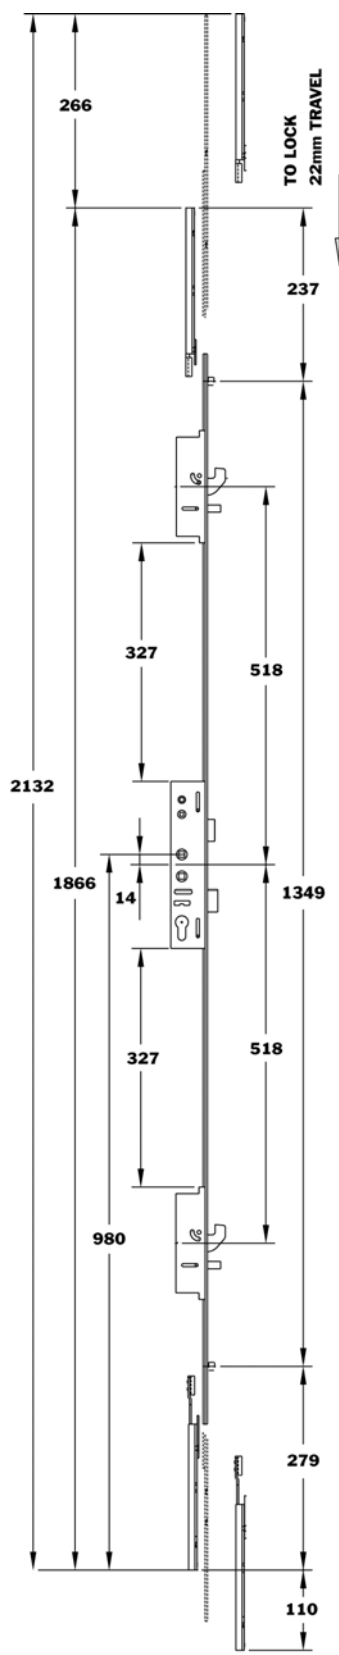

DEPAD45121S

**NOTE:**  
Shootbolt extensions &  
keeps supplied extra:  
**PAD90011SS / 90005SS**

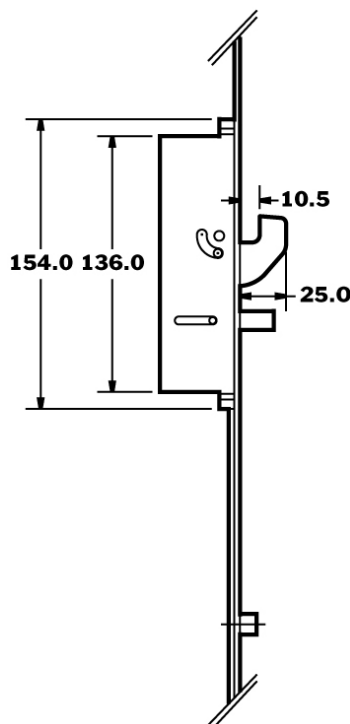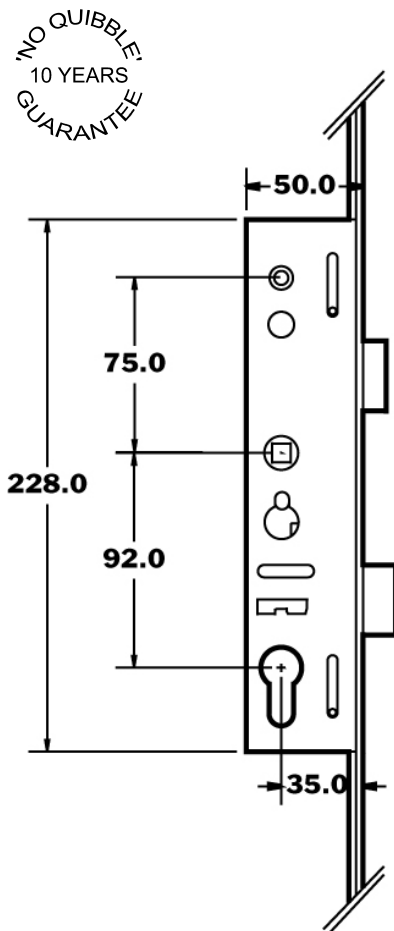

Designed to meet and exceed the requirements of BBA, ABI, PAS 23 / 24 and the latest CEN European security and performance standards plus cycle tested to BS5872.

The sprung Lockmaster series has a single follower to give lift-lever operation for use with lever / lever furniture.

Pre-compression rollers are unique to the Lockmaster and ensure smooth action and positive door alignment.

Other features include deadbolt with hardened pins.

## Lever / Lever door locks - sprung

DEPAD10100SS	35mm backset, 4 roller, rev. latch & deadbolt	silver triklad
DEPAD13100SS	35mm backset, 2 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt	silver triklad
DEPAD13120SS	35mm backset, 2 hook, 2 anti-lift pins, 4 roller, rev. latch & deadbolt	silver triklad
DEPAD14100SS	35mm backset, 4 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt	silver triklad
DEPAD45100SS	35mm backset, 2 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt, <i>extendable</i>	silver triklad
DEPAD45120SS	35mm backset, 2 hook, 2 anti-lift pins, 4 roller, rev. latch & deadbolt, <i>extendable</i>	silver triklad

## Shoot bolts for extendable models

DEPAD90011SS / 90005SS	2 x shoot bolt extensions incl. keeps	silver triklad
DEPAD90012SS / 90005SS	2 x high security shoot bolt extensions incl. keeps	silver triklad

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4. The finish is also Chromium hexavalent 6 free, meeting the latest European (*green*) specification. Components plated to BS1706. 1990

**NOTE:** Nightlatch operation can not be achieved using the sprung lockmaster.


All sprung door locks require unsprung handles sets - see the Door Furniture section of this catalogue

Keeps to suit the D&E lockmaster range - see pages L-1012 to L-1016


# D&E Lockmaster multi-point locks - sprung

CI/SfB		
	31/59	Xt 7
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE

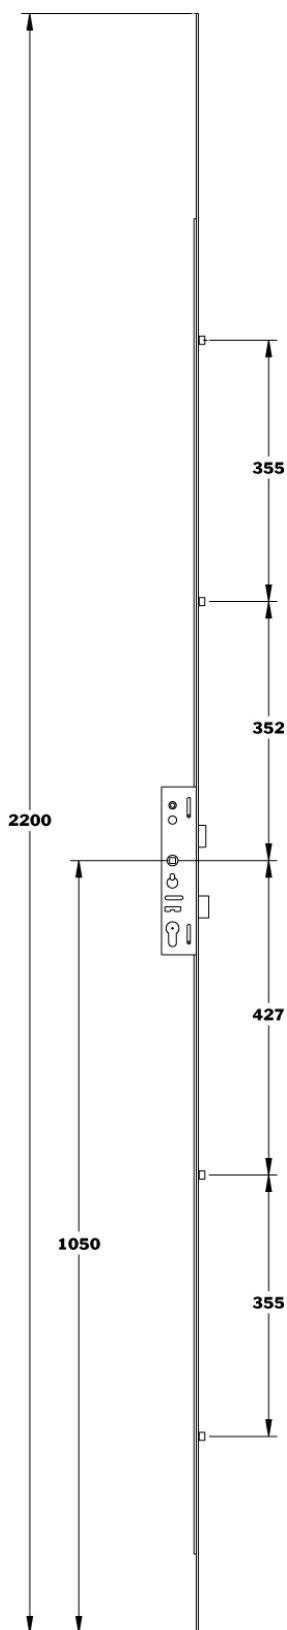

DEPAD10100SS

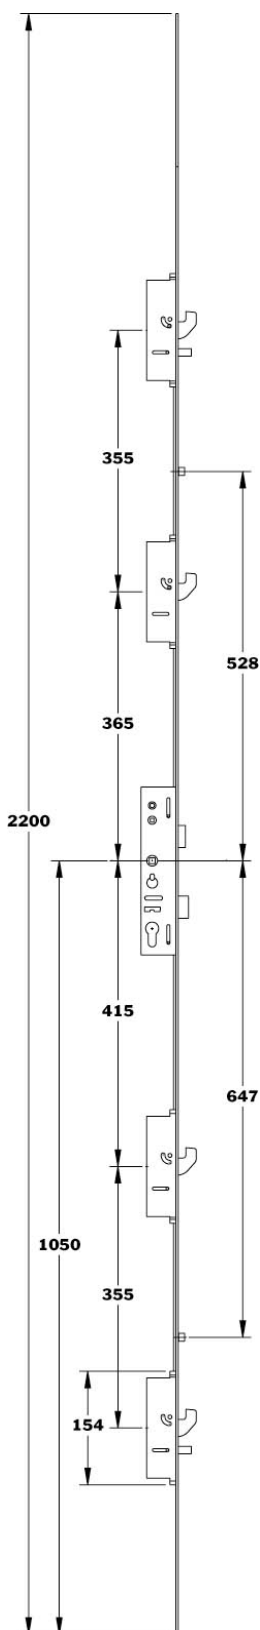

DEPAD14100SS

Sales: 01733 896123



L-1006



Fax: 01733 894466

E&OE

# D&E Lockmaster multi-point locks - sprung

CI/SfB		
	31/59	Xt 7
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE

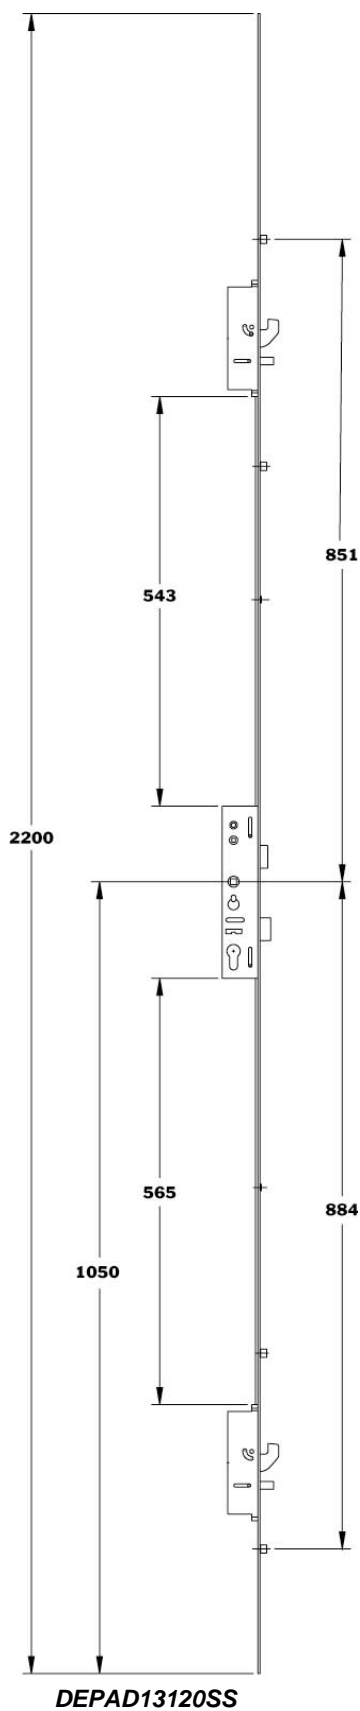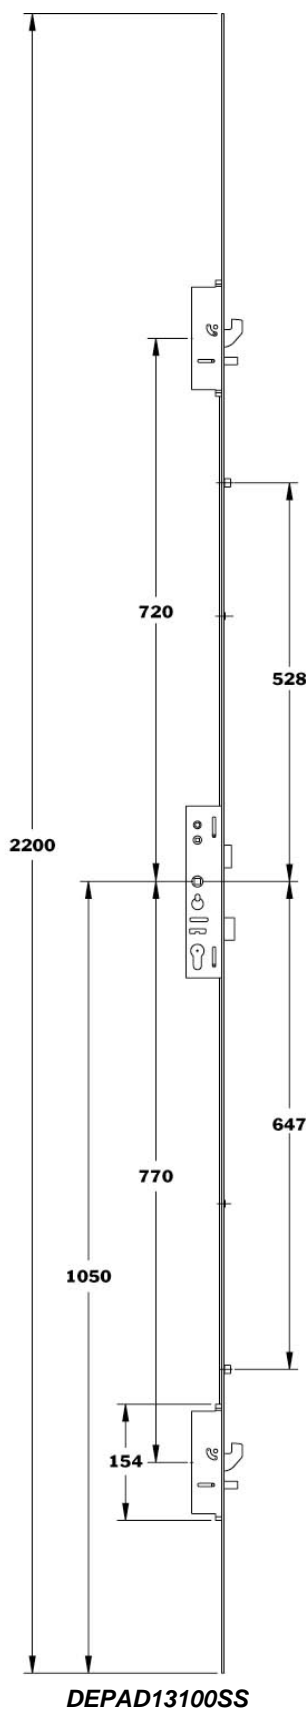

Sales: 01733 896123




L-1007

Fax: 01733 894466

E&OE

CI/SfB		
	31/59	Xt 7
September 2007		


NO QUIBBLE  
10 YEARS  
GUARANTEE

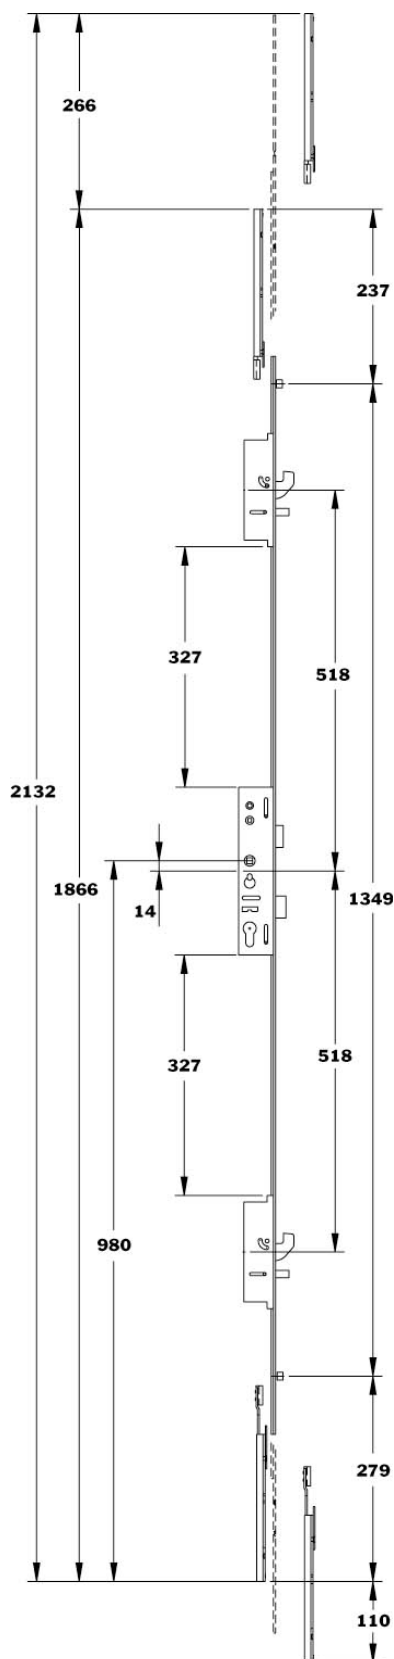


**PAD45100SS**

**NOTE:**  
Shootbolt extensions &  
keys supplied extra:  
**DEPAD90011SS / 90005SS**



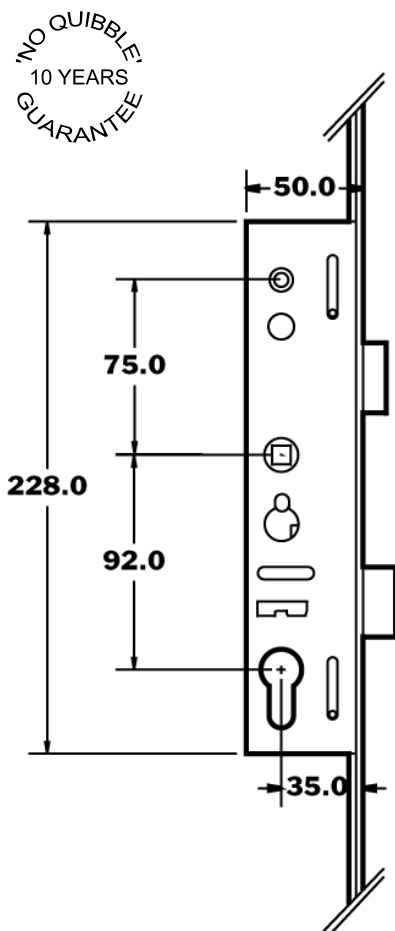

Hook-Case

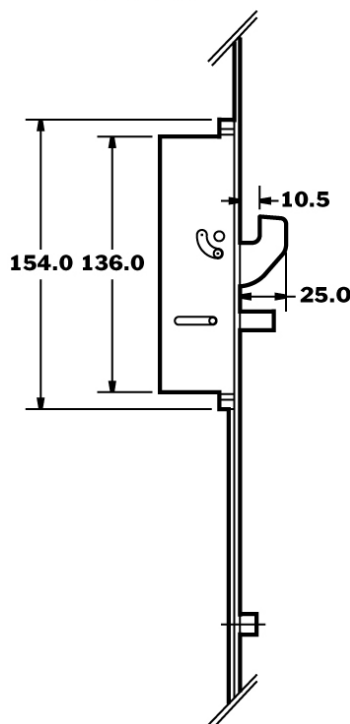

Designed to meet and exceed the requirements of BBA, ABI, PAS 23 / 24 and the latest CEN European security and performance standards plus cycle tested to BS5872.

The sprung Lockmaster series specifically designed for use on french doors, has a single follower to give lift-lever operation for use with lever / lever furniture.

Pre-compression rollers are unique to the Lockmaster and ensure smooth action and positive door alignment.

Other features include deadbolt with hardened pins.

## French door door locks - sprung

DEPAD30100SS	35mm backset, slave door lock	silver triklad
DEPAD31100SS	35mm backset, 2 roller, rev. latch & deadbolt, <i>extendable</i>	silver triklad
DEPAD32100SS	35mm backset, 2 hook, 2 roller, rev. latch & deadbolt, <i>extendable</i>	silver triklad
DEPAD34100SS	35mm backset, 2 hook, 2 anti-lift pins, 2 roller, rev. latch & deadbolt, <i>extendable</i>	silver triklad

## Shoot bolts for extendable models

DEPAD90011SS / 90005SS	2 x shoot bolt extensions incl. keeps	silver triklad
DEPAD90012SS / 90005SS	2 x high security shoot bolt extensions incl. keeps	silver triklad

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4. The finish is also Chromium hexavalent 6 free, meeting the latest European (*green*) specification. Components plated to BS1706. 1990

**NOTE:** Nightlatch operation can not be achieved using the sprung lockmaster.



All sprung door locks require unsprung handles sets - see the Door Furniture section of this Catalogue.

Keeps to suit the D&E lockmaster range - see pages L-1012 to L-1016

# D&E Lockmaster multi-point locks - French door

CI/SfB		
31/59	Xt 7	
September 2007		

NO QUIBBLE  
10 YEARS  
GUARANTEE

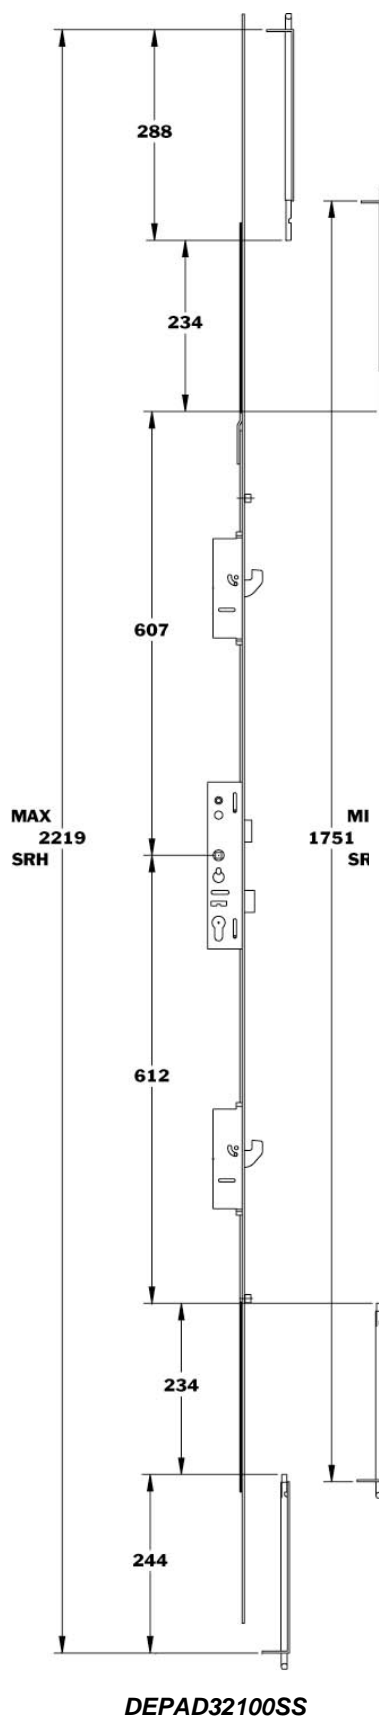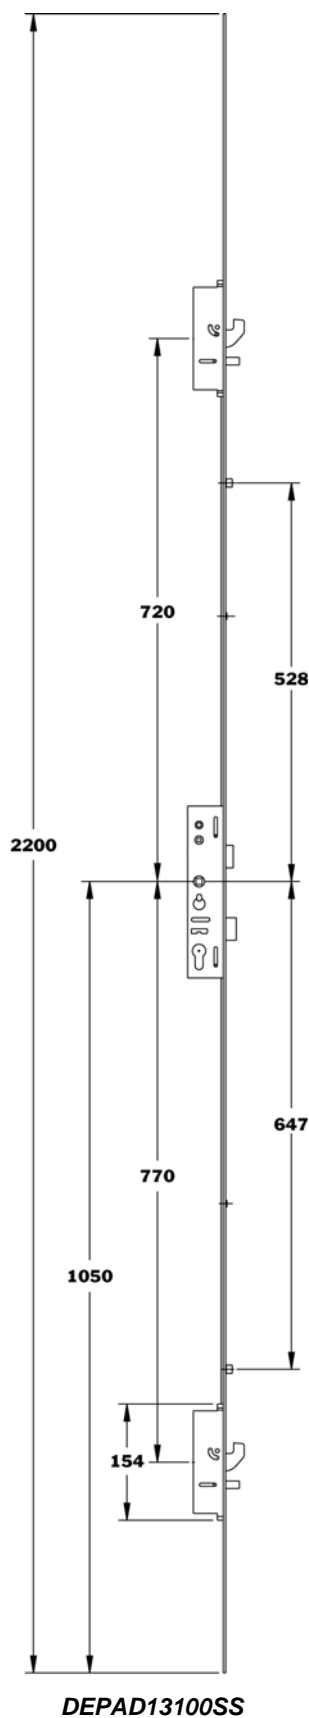

MAX  
2219  
SRH

MI  
1751  
SR

**NOTE:**  
Shootbolt extensions &  
keeps supplied extra:  
**PAD90011SS / 90005SS**

Sales: 01733 896123




L-1010

Fax: 01733 894466

E&OE

CI/SfB		
	31/59	Xt 7
September 2007		

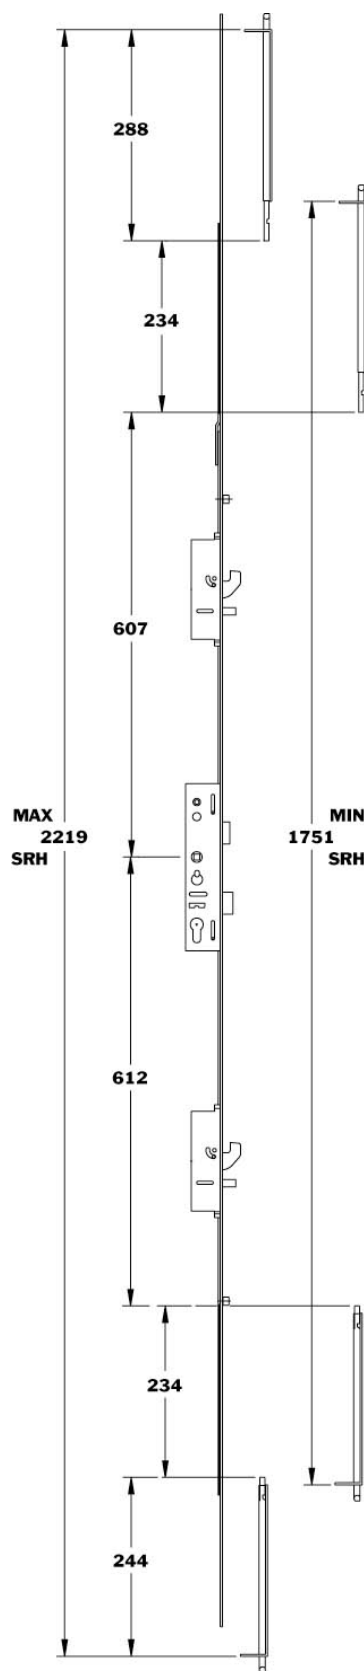

DEPAD34100SS

**NOTE:**  
Shootbolt extensions &  
keeps supplied extra:  
**PAD90011SS / 90005SS**

CI/SfB		
	31/59	Xt 7
September 2007		

The extensive range of keeps to complement the D&E Lockmaster door bolts for residential and french doors.

*For aluminium & timber applications please contact the sales team.*

*Profile packers are available if required - please specify profile when ordering*

DEPAD90004      box strike insert

## **Door lock keeps**

DEPAD90021/LH	centre latch / deadbolt plate - LH	silver triklad
DEPAD90022/RH	centre latch / deadbolt plate - RH	silver triklad
DEPAD90023	combined hook with anti-lift & roller keeps with box strike	silver triklad
DEPAD90061S/LH	combined hook & 2 roller keep - LH	silver triklad
DEPAD90062S/RH	combined hook & 2 roller keep - RH	silver triklad
DEPAD90007SS	single hook keep	silver triklad

## **French door shootbolt keep**

DEPAD90005SS	single adj. shootbolt keep	silver triklad
DEPAD90006SS	double adj. shootbolt keep	silver triklad

## **Residential door shootbolt keeps**

DEPAD90015SS	single shootbolt keep	silver triklad
DEPAD90051SS	single adj. shootbolt keep	silver triklad

## **One piece high security keeps**


DEPAD90041S/LH	to suit DEPAD13100SS & DEPAD13101SS - LH	silver triklad
DEPAD90042S/RH	to suit DEPAD13100SS & DEPAD13101SS - RH	silver triklad
DEPAD90043S/LH	to suit DEPAD13120SS DEPAD13121SS - LH	silver triklad
DEPAD90044S/RH	to suit DEPAD13120SS DEPAD13121SS - RH	silver triklad
DEPAD90045S/LH	to suit DEPAD32100SS - LH	silver triklad
DEPAD90046S/RH	to suit DEPAD32100SS - RH	silver triklad
DEPAD90107S/LH	to suit DEPAD45100SS - LH	silver triklad
DEPAD90108S/RH	to suit DEPAD45100SS - RH	silver triklad

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4. The finish is also Chromium hexavalent 6 free, meeting the latest European (*green*) specification. Components plated to BS1706. 1990


CI/SfB		
	31/59	Xt 7
September 2007		




**DEPAD90004**  
Box strike insert



Box strike dimensions




**DEPAD90015SS**  
Single non-adjustable shootbolt keep  
*Requires 2 profile packers*




**DEPAD90005SS**  
Single adjustable shootbolt keep - supplied in pairs

**DEPAD90052S**  
Single adjustable shootbolt keep with box strike - supplied in pairs  
*Requires 2 profile packers*




**DEPAD90051S**  
Single adjustable shootbolt keep - supplied in pairs

**DEPAD90053S**  
Single adjustable shootbolt keep with box strike - supplied in pairs  
*Requires 2 profile packers*



**DEPAD90026SS**  
Single adjustable offset shootbolt keep - supplied in pairs


**DEPAD90055**  
Single adjustable offset shootbolt keep with box strike - supplied in pairs  
*Requires 2 profile packers*



**DEPAD90006SS**  
Double adjustable shootbolt keep


**DEPAD90054S**  
Single adjustable offset shootbolt keep with box strike  
*Requires 2 profile packers*

CI/SfB			
	31/59	Xt 7	
September 2007			

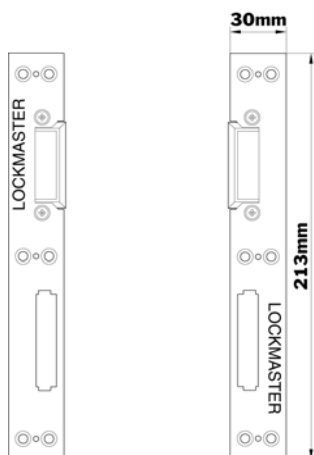


## DEPAD90021/LH DEPAD90022/RH

Centre latch & deadbolt plates.  
Requires 3 profile packers per keep

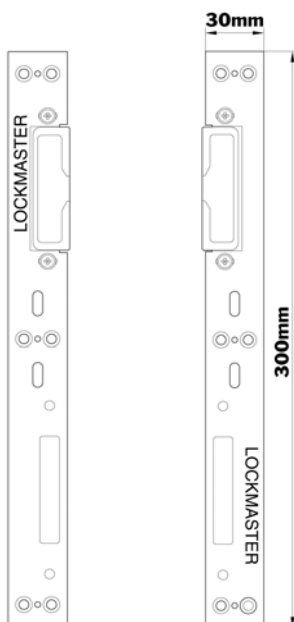

## DEPAD90023

Combined hook & roller keep - (supplied in pairs)  
Requires 3 profile packers per keep

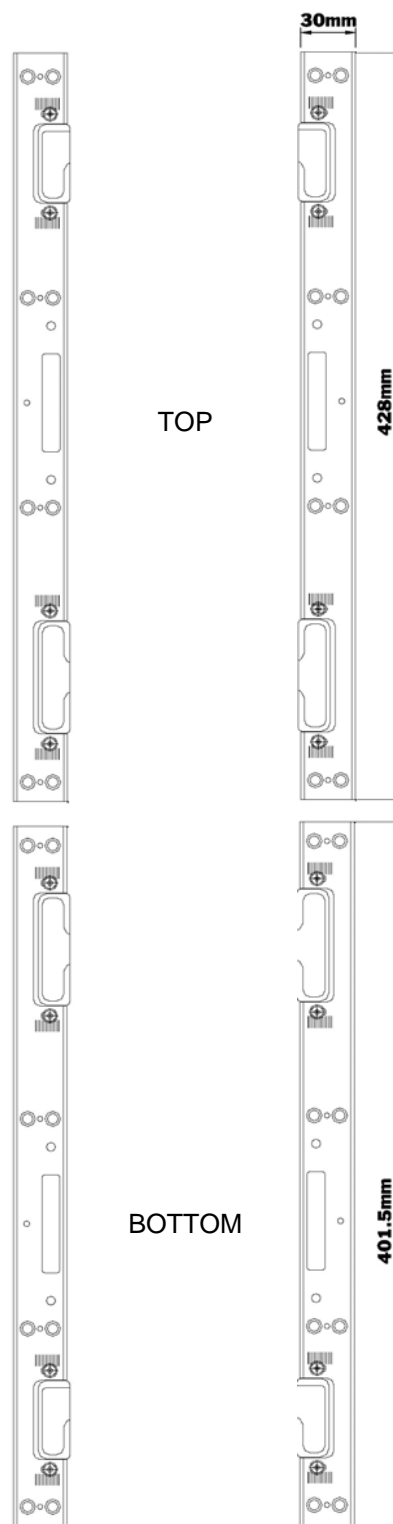


## DEPAD90061S/LH

## DEPAD90062S/RH

Combined hook & 2 roller keep - (supplied in pairs)  
Requires 4 profile packers per keep

CI/SfB		
	31/59	Xt 7
September 2007		

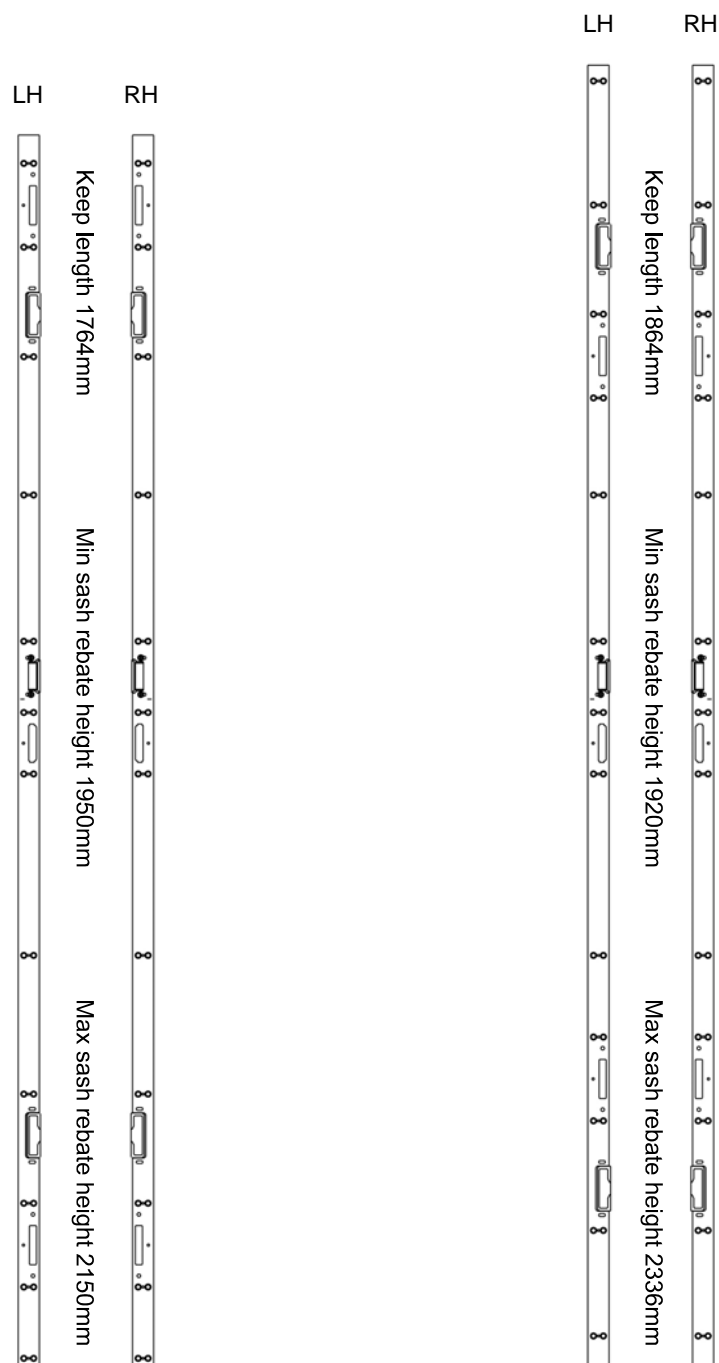

**DEPAD90041S/LH DEPAD90042S/RH**

For use with  
DEPAD13100SS & DEPAD13101SS


Requires 12 profile packers

**DEPAD90107S/LH DEPAD90108S/RH**

For use with  
DEPAD45100SS & DEPAD45101SS


Requires 12 profile packers

CI/SfB		
	31/59	Xt 7
September 2007		

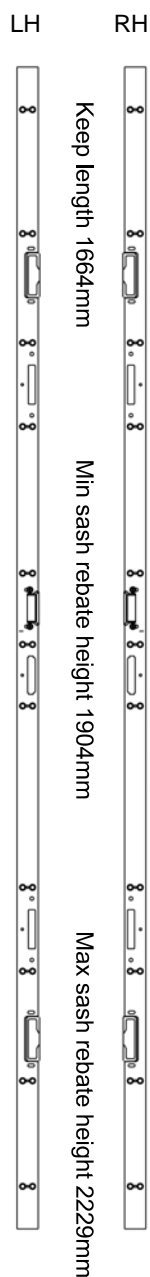

**DEPAD90045S/LH DEPAD90046S/RH**

For use with  
DEPAD32100SS  
Requires 12 profile packers

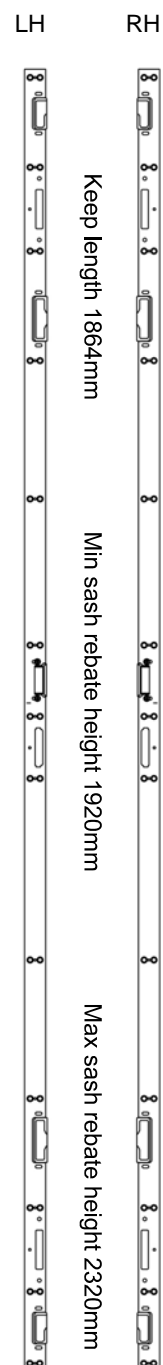

**DEPAD90043S/LH DEPAD90044S/RH**

For use with  
DEPAD13120SS & DEPAD13121SS  
Requires 12 profile packers



CI/SfB			
	31/59	Xt 7	
September 2007			

The D&E Maco 'lift lever' & 'turn key' to lock range of multi-point door locks have a central lockcase comprising of a latch & deadbolt with a 20mm throw.

Other locking points include hooks with a 24mm throw & self height adjusting 'I.S.' (*Intelligent Security*) mushroom cams which can be used as either a standard cam or a mushroom cam for extra security.

## Multi-point locks for PVCu doors

DEMAC56211	35mm backset, 4 I.S. cams, rev. latch & deadbolt	silver triklad
DEMAC56231	35mm backset, 4 I.S. cams, 2 hook rev. latch & deadbolt - <i>extendable</i>	silver triklad

## Multi-point locks for composite / timber doors

DEMAC53581	35mm backset, 4 hook, rev. latch & deadbolt	silver triklad
------------	---	----------------

## Shoot bolts for extendable models


DESBT55209	2 x shoot bolt extensions - 300mm	silver triklad
DESBT55210	2 x shoot bolt extensions with I.S. cam - 500mm	silver triklad
DESBT55211	reverse action shootbolt with I.S. cam - 300mm	silver triklad

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4.


**NOTE:** All keeps for the D&E Maco range are profile related. If you require a keep, please ensure you have your profile name and / or number.

*All sprung door locks require unsprung handles sets - see the Door Furniture section of this catalogue*


CI/SfB		
	31/59	Xt 7
September 2007		

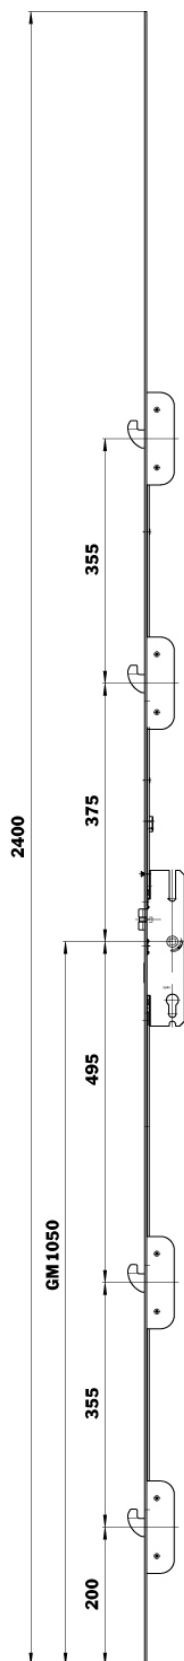

DEMAC53581

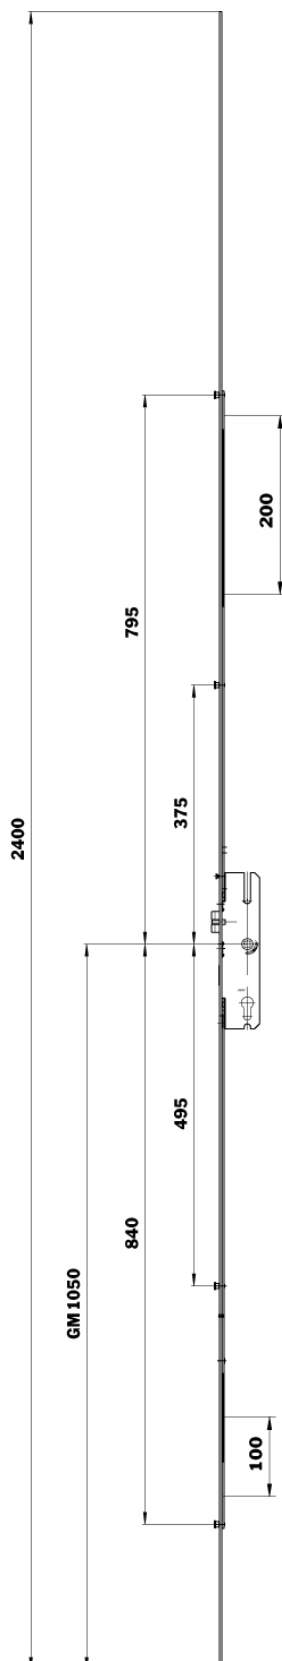

DEMAC56211

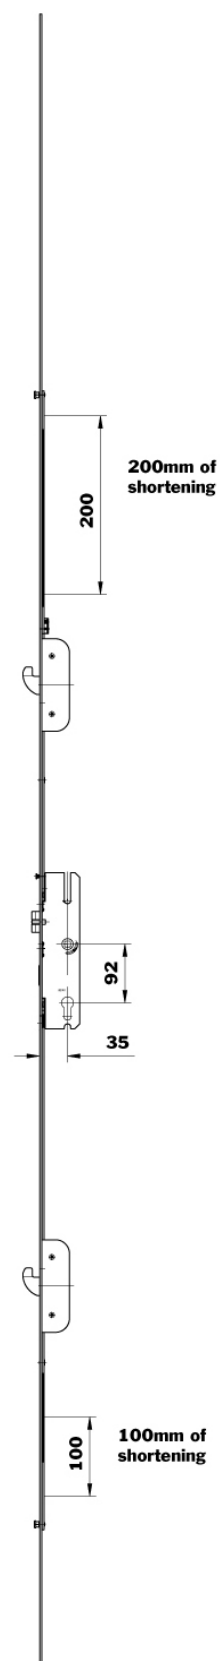

DEMAC56231

CI/SfB			
	31/59	Xt 7	
September 2007			

The D&E Maco multi-point door locks with 'split spindle' & 'nightlatch' for extra security, have a central lockcase comprising of a latch & deadbolt with a 20mm throw .

Other locking points include hooks with a 24mm throw & self height adjusting 'I.S.' (*Intelligent Security*) mushroom cams which can be used as either a standard cam or a mushroom cam for extra security.

## Split spindle multi-point locks for PVCu doors

DEMAC56301      35mm backset, 2 I.S. cams, 2 hook  
rev. latch & deadbolt - *extendable*      silver trikklad

## Split spindle multi-point locks for composite / timber doors

DEMAC54201      35mm backset, 4 hook, rev. latch  
& deadbolt      silver trikklad

## D&E split spindle kit

DESP5004/120      split spindle kit - 55 / 65mm

Length:      120mm  
Diameter:      8mm

## Shoot bolts for extendable models

DESBT55209      2 x shoot bolt extensions - 300mm      silver trikklad

DESBT55210      2 x shoot bolt extensions with  
I.S. cam- 500mm      silver trikklad



DESBT55211      reverse action shootbolt with  
I.S. cam - 300mm      silver trikklad

Corrosion resistance:      Silver trikklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4.

**NOTE:**      All keeps for the D&E Maco range are profile related. If you require a keep, please ensure you have your profile name and / or number.

*All sprung door locks require unsprung handles sets -  
see the Door Furniture section of this catalogue*

CI/SfB		
	31/59	Xt 7
September 2007		

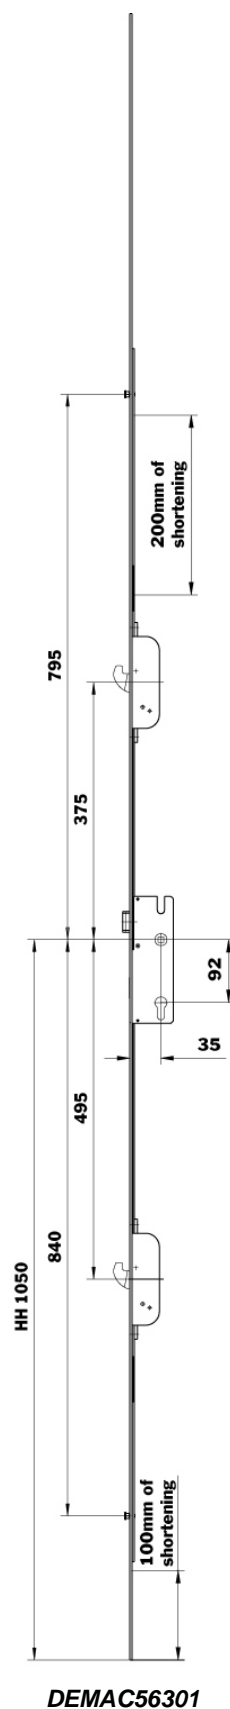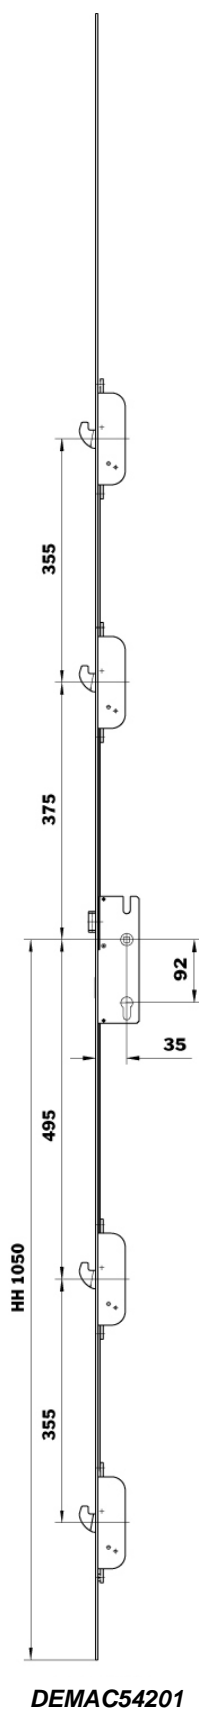

CI/SfB			
	31/59	Xt 7	
September 2007			

The D&E Maco multi-point door locks with '*split spindle*' & '*nightlatch*' for extra security, have a central lockcase comprising of a latch & deadbolt with a 20mm throw .

Other locking points include hooks with a 24mm throw & self height adjusting '*I.S.*' (*Intelligent Security*) mushroom cams which can be used as either a standard cam or a mushroom cam for extra security.

## Multi-point locks for PVCu french doors

DEMAC53431	35mm backset, 2 hook, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEMAC53441	35mm backset, slave door lock	silver triklad
DEMAC56291	35mm backset, 2 ' <i>I.S.</i> ' cam, rev. latch & deadbolt - <i>extendable</i>	silver triklad

## D&E split spindle

DESP5004/120	split spindle - 55 / 65mm
Length:	120mm
Diameter:	8mm

## Shoot bolts for extendable models

DESBT55209	2 x shoot bolt extensions - 300mm	silver triklad
DESBT55210	2 x shoot bolt extensions with I.S. cam- 500mm	silver triklad
DESBT55211	reverse action shootbolt with I.S. cam - 300mm	silver triklad


Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4.

**NOTE:** All keeps for the D&E Maco range are profile related. If you require a keep, please ensure you have your profile name and / or number.


*All sprung door locks require unsprung handles sets - see the Door Furniture section of this catalogue*

**A split spindle pack will also be required - see page L-1038**


CI/SfB		
	31/59	Xt 7
September 2007		

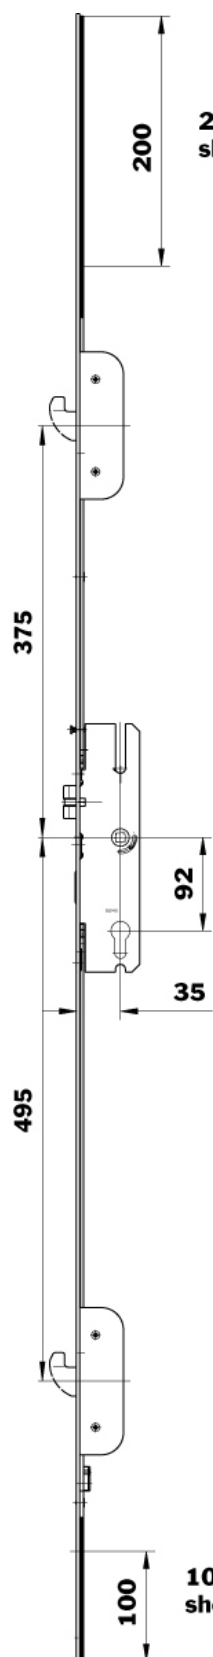

DEMAC53431

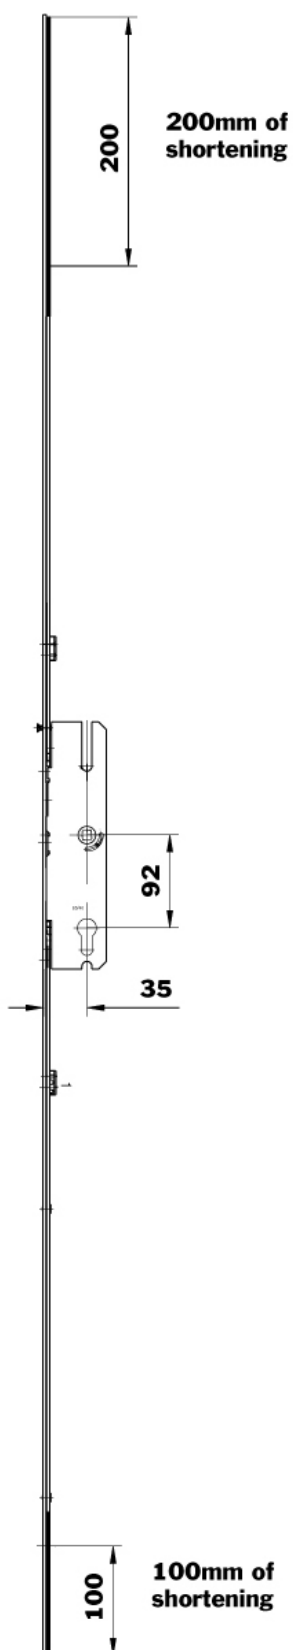

DEMAC53441

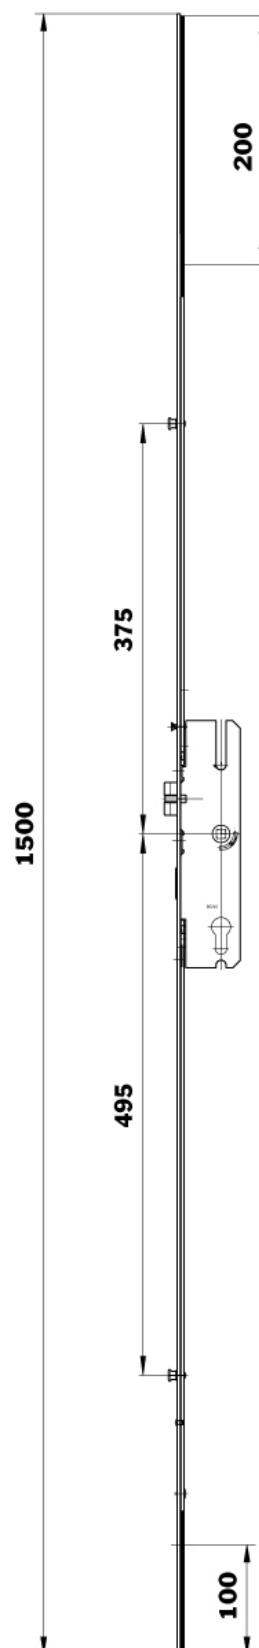

DEMAC56291

The D&E Ferco are available in a range of options - lever / lever, Europa 'Plus' Fastlock & Nightlatch.

Central & remote deadbolts project 20mm whilst the hooks have a 23mm throw. Additional security features include adjustable compressions roller cams & adjustable anti-jemmy steel mushroom cams.

## Europa lever / lever operation

DEFER32581	28mm backset, 4 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32771	28mm backset, 2 mushroom, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32755	28mm backset, 3 deadbolts & rev. latch - <i>extendable</i>	silver triklad
DEFER32487	28mm backset, 2 hook, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32580	35mm backset, 4 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32770	35mm backset, 2 mushroom, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32754	35mm backset, 3 deadbolts & rev. latch - <i>extendable</i>	silver triklad
DEFER32218	35mm backset, 3 offset deadbolts & rev. latch - <i>extendable</i>	silver triklad
DEFER32486	35mm backset, 2 hook, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32602	35mm backset, 2 hook, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad

## Europa 'Plus' Fastlock

DEFER33106	35mm backset, 2 hook, rev. latch & deadbolt - <i>extendable</i>	silver triklad
------------	---	----------------

## Europa Nightlatch\*

DEFER32600	35mm backset, 2 hook, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32610	35mm backset, 2 hook, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32694	35mm backset, 4 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad

CI/SfB		
	31/59	Xt 7
September 2007		

## D&E half spindle



For use with PVCu handles with a bolt through fixing - lever / offset lever or pad.

DESP5011/55	half spindle - 55mm	<i>Supplied individually as profile related</i>
DESP5011/65	half spindle - 65mm	
DESP5011/75	half spindle - 75mm	

Diameter: 8mm


\* To obtain nightlatch operation you must use 2 'half spindles' with every multi-point lock. If you require a Spindle kit, they are profile specific so please ensure you have your profile name and / or number.

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4.


**NOTE:** All unsprung door locks require sprung handles sets - see the Door Furniture section of this catalogue

*Keeps to suit the D&E GU Ferco range - see pages L-1031 & L-1032*



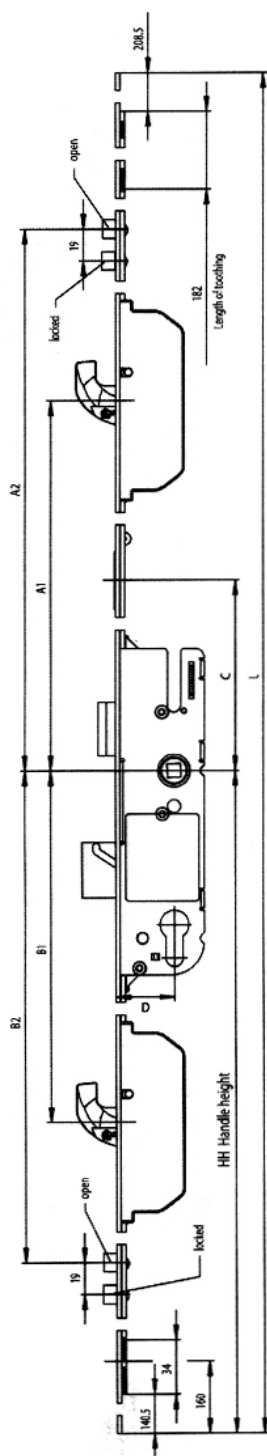

Face plate - 16mm  
Centres - 92mm  
8mm spindle

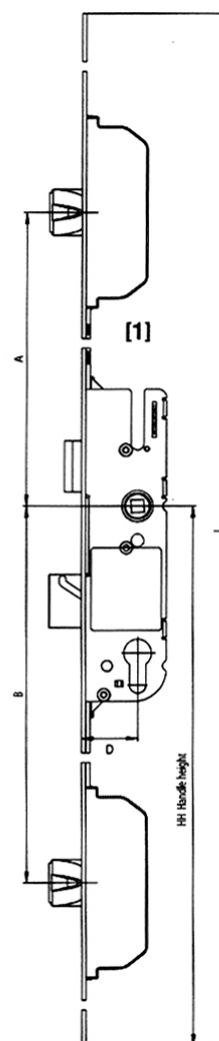

## DEFER32602

### Europa Lever / lever

A1	568mm
B1	660mm
C	345mm
L	2285mm

## DEFER32610


### Europa Nightlatch

A2	768.5
B2	809.5mm
HH	1050mm


## DEFER32218

### Europa Lever / lever - 35mm backset

A	737.5mm	B	872.5mm
HH	100mm	L	2285mm

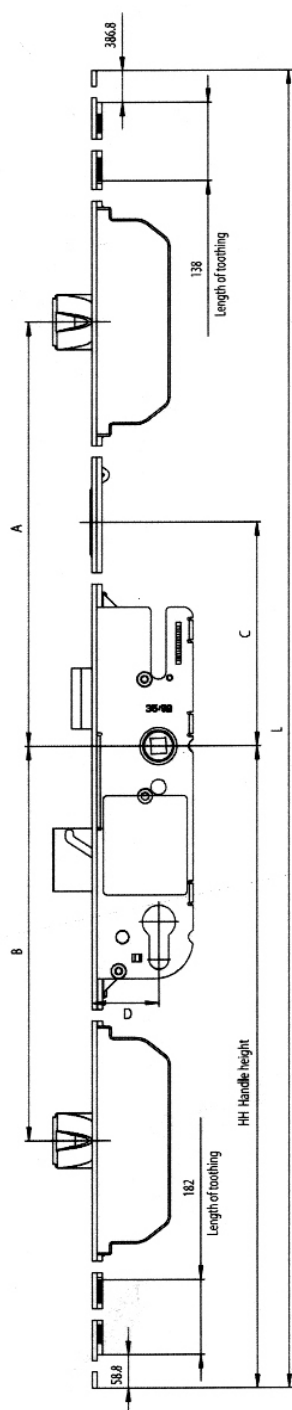

Face plate - 16mm  
Centres - 92mm  
8mm spindle

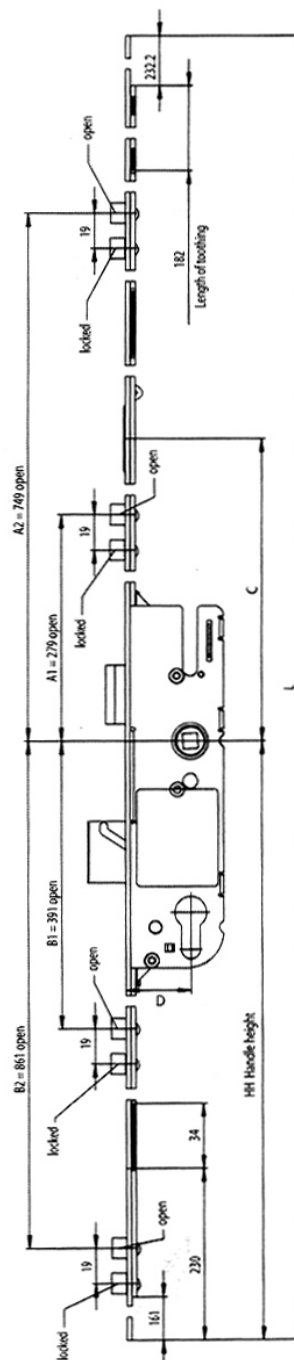

**DEFER32754**  
**Europa Lever / lever -**  
**35mm backset**

A 568mm  
C 345mm  
L 2285mm

**DEFER32755**  
**Europa Lever / lever -**  
**28mm backset**


B 660mm  
HH 105mm

**DEFER32580**  
**Europa Lever / lever -**  
**35mm backset**


A1 279mm  
B1 391mm  
C 415mm  
L 2285mm

**DEFER32581**  
**Europa Lever / lever -**  
**28mm backset**

A2 749mm  
B2 861mm  
HH 1050mm

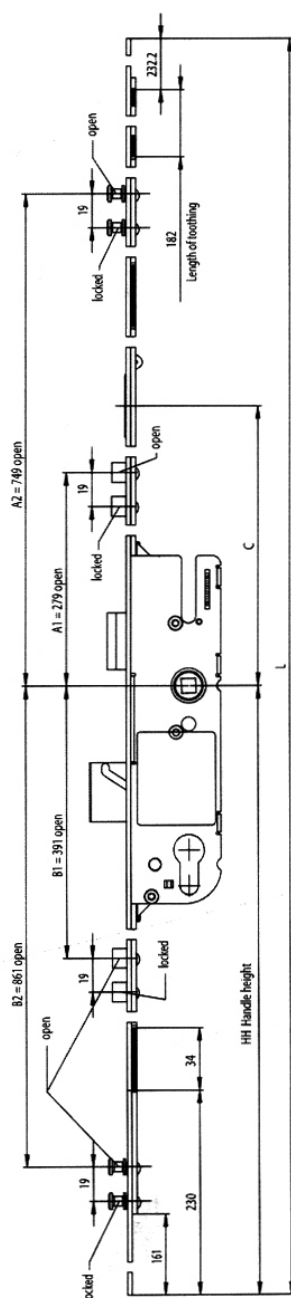

Face plate - 16mm  
Centres - 92mm  
8mm spindle

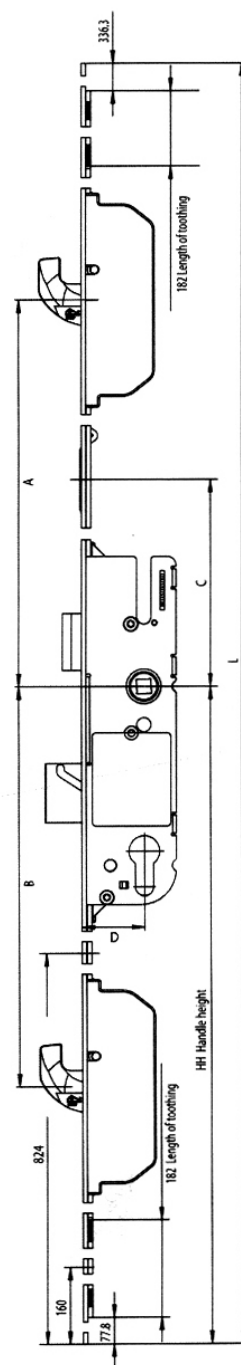

**DEFER32770**  
**Europa Lever / lever -**  
**35mm backset**

A1	279mm
B1	391mm
C	415mm
L	2285mm

**DEFER32771**  
**Europa Lever / lever -**  
**28mm backset**

A2	749mm
B2	861mm
HH	1050mm

**DEFER32486**  
**Europa Lever / lever -**  
**35mm backset**

A	568mm
C	345mm
L	2285mm

**DEFER32487**  
**Europa Lever / lever -**  
**28mm backset**

B	660mm
HH	800-1050mm

CI/SfB			
	31/59	Xt 7	
September 2007			

The D&E Ferco french door programme offers many options on both Master & slave leaf. In addition the specific French door locks listed below, any GU Ferco Europa multi-point lock can be used to operate the main leaf.

All multi-point locks have a 92mm centre and are available in lever / lever operation only.

Central & remote deadbolts project 20mm. Additional security features include adjustable compressions roller cams & adjustable anti-jimmy steel mushroom cams.

## Master leaf multi-point locks

DEFER32687	28mm backset, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32689	30mm backset, 2 roller, fixed bottom shootbolt, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32686	35mm backset, 2 roller, rev. latch & deadbolt - <i>extendable</i>	silver triklad
DEFER32688	35mm backset, 2 roller, fixed bottom shootbolt, rev. latch & deadbolt - <i>extendable</i>	silver triklad


## Slave leaf doorbolts

DEFER32571	28mm backset, no locking points - extendable only	silver triklad
DEFER32570	35mm backset, no locking points - extendable only	silver triklad


## Extensions

DEFER67600S	top action shootbolt	silver triklad
DEFER16798S	bottom shootbolt	silver triklad

CI/SfB		
31/59	Xt 7	
September 2007		

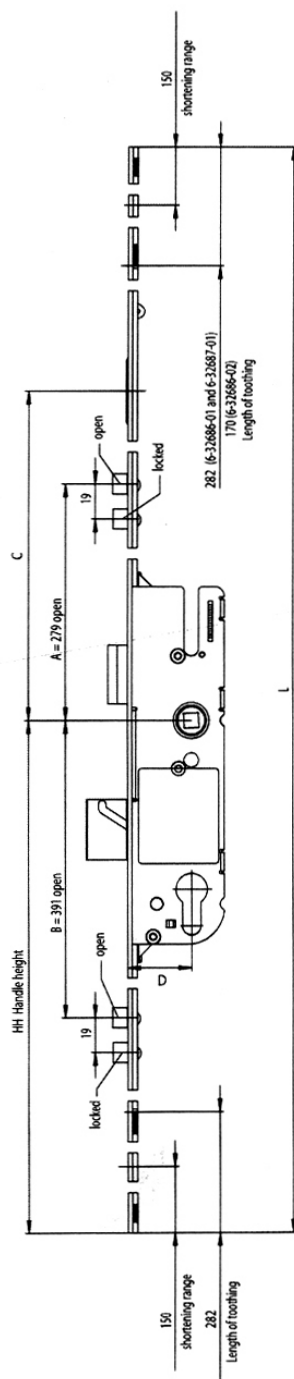

Face plate - 16mm  
Centres - 92mm  
8mm spindle

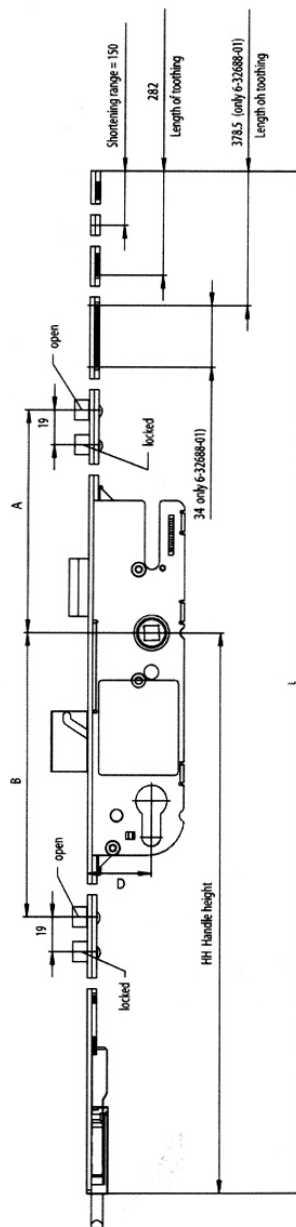

**DEFER32686**  
**Europa Lever / lever -**  
**35mm backset**

A	279mm
C	415mm
L	1900mm

**DEFER32687**  
**Europa Lever / lever -**  
**28mm backset**

B	391mm
HH	890mm


**DEFER32486**  
**Europa Lever / lever -**  
**35mm backset**

A	279mm
L	1900mm

**DEFER32487**  
**Europa Lever / lever -**  
**28mm backset**

B	391mm
HH	1050mm

CI/SfB		
	31/59	Xt 7
September 2007		

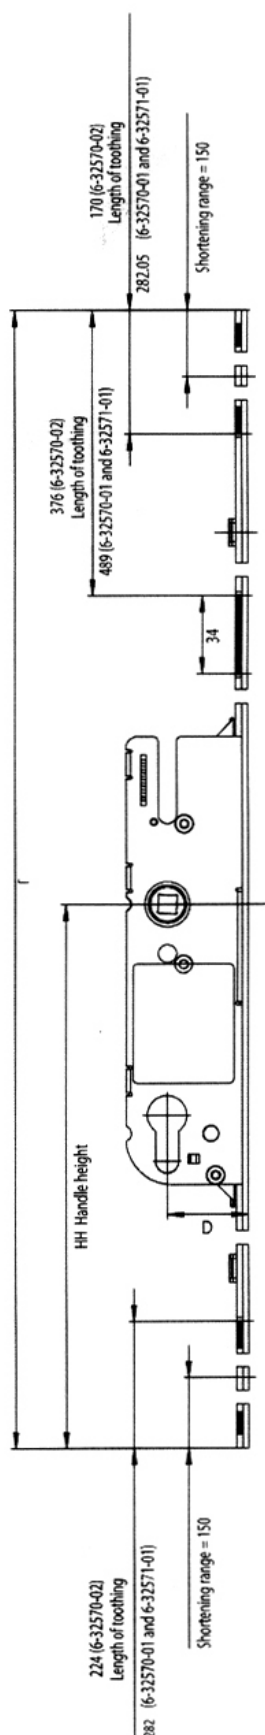

**DEFER32570**  
**Europa Lever / lever -**  
**35mm backset**  
 HH 800-1050mm

**DEFER32571**  
**Europa Lever / lever -**  
**28mm backset**  
 L 1830mm

Face plate - 16mm  
 Centres - 92mm  
 8mm spindle

CI/SfB			
	31/59	Xt 7	
September 2007			

The comprehensive range of keeps to complement the GU Ferco door bolts for residential and french doors.

*For aluminium & timber applications please contact the sales team.*

*Profile packers are available if required - please specify profile when ordering*

DEGUL33905	box strike insert for deadbolt keep
DEGUL33906	box strike insert for centre latch keep

## **GU Ferco standard keeps**


DEGUL37986S	roller keep	silver triklad
DEGUL30014LS	centre latch / deadbolt keep - LH	silver triklad
DEGUL30014RS	centre latch / deadbolt keep - RH	silver triklad
DEGUL30012	G4 deadbolt keep	silver triklad
DEGUL30013S	hook keep	silver triklad

## **Shootbolt keeps**


DEPAD90005SS	single adj. shootbolt keep	silver triklad
DEPAD90006SS	double adj. shootbolt keep	silver triklad

Corrosion resistance: Silver triklad is an upgraded plating specification giving products 240 hours neutral salt spray meeting the requirements of BS7412 Grade 4. The finish is also Chromium hexavalent 6 free, meeting the latest European (*green*) specification. Components plated to BS1706. 1990


CI/SfB		
	31/59	Xt 7
May 2008		




**DEGUL37968S**  
Roller keep

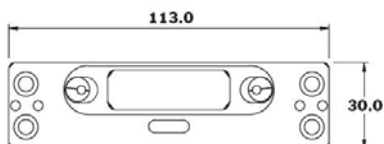


**DEGUL30012S**  
G4 Europa deadbolt keep

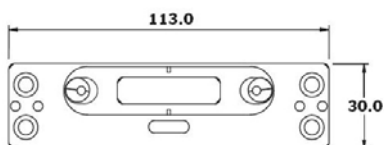


**DEGUL30013S**  
G4 Europa hook keep



**DEPAD90005SS**  
Single adjustable shootbolt keep - supplied in pairs  
*Requires 2 profile packers*



**DEPAD90006SS**  
Double adjustable shootbolt keep  
*Requires 2 profile packers*

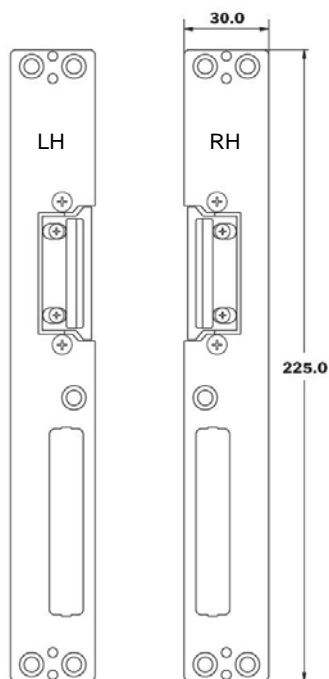

**DEGUL30014LS**  
Centre latch & deadbolt keep - LH

**DEGUL30014RS**  
Centre latch & deadbolt keep - RH




D&E GU Ferco finger operated shootbolts are for use on french doors.

## PVCu doors

DESBT044101

finger operated shootbolt - euro-groove fitting

silver triklad

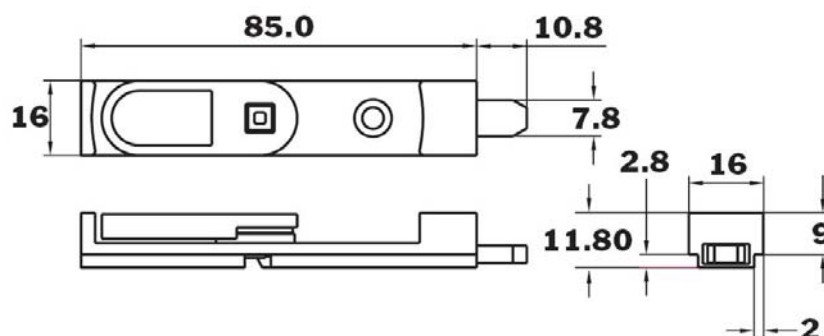


## Timber / composite doors

DESBT28957

Maco finger operated shootbolt

silver triklad

**NOTE:** Other finger operated shootbolts are available to special order. Please contact the sales team with your requirements.

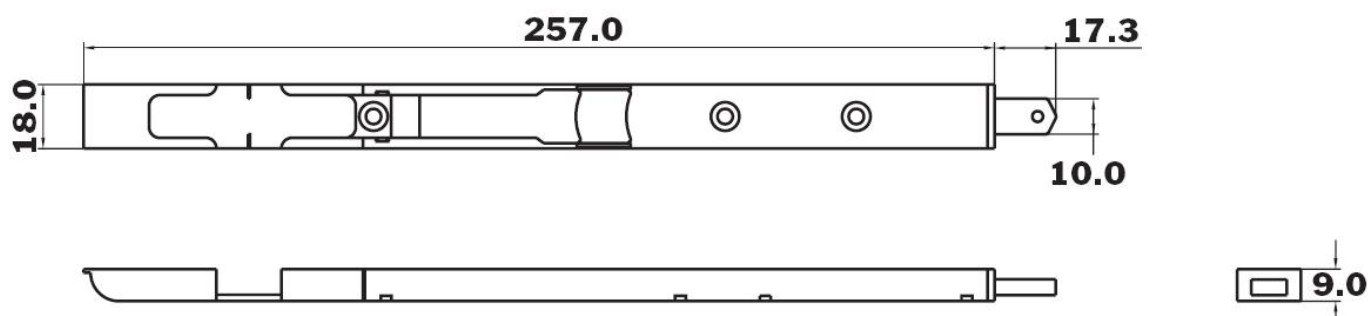

CI/SfB			
	31/59	Xt 7	
September 2007			

Designed to meet and exceed the latest CEN European security and performance standards.

The burglary resistant multi-point locks from Nemef have been developed to meet the highest demands which are made on locks & builders hardware. The unique construction combines optimal security with durability and quality.

Suitable for a wide range of doors, the 4923 & 4926 offer installers an easily installed locks and end user easy operation.

### **Burglary resistant door specifications:**

Door height: up to 2400mm  
Door thickness: 38 - 40mm

Door height: up to 2700mm  
Door thickness: 54mm

### **Operation**

#### **DE4923/02**

The DE4923/02 is a gear operated multi-point lock. The latch bolt is operated by the lever handles, all other bolts are wound out when the cylinder key is turned. Locking of the lock is via a euro-profile cylinder

#### **DE4926/02**




The DE4926/02 is a lever operated multi-point lock. The latch bolt is operated by the lever handles, all other bolts are thrown when the lever handle is lifted. Locking of the lock is via a euro-profile cylinder

DE4923/02/55	55mm backset, 3 hook & rev. latch gear operated lock	silver
DE4923/02/65	65mm backset, 3 hook & rev. latch gear operated lock	silver
DE4926/02/55	55mm backset, 3 hook & rev. latch mechanically operated lock	silver
DE4926/02/65	65mm backset, 3 hook & rev. latch mechanically operated lock	silver

CI/SfB		
	31/59	Xt 7
September 2007		

DE4923/02/55



DE4923/02/65

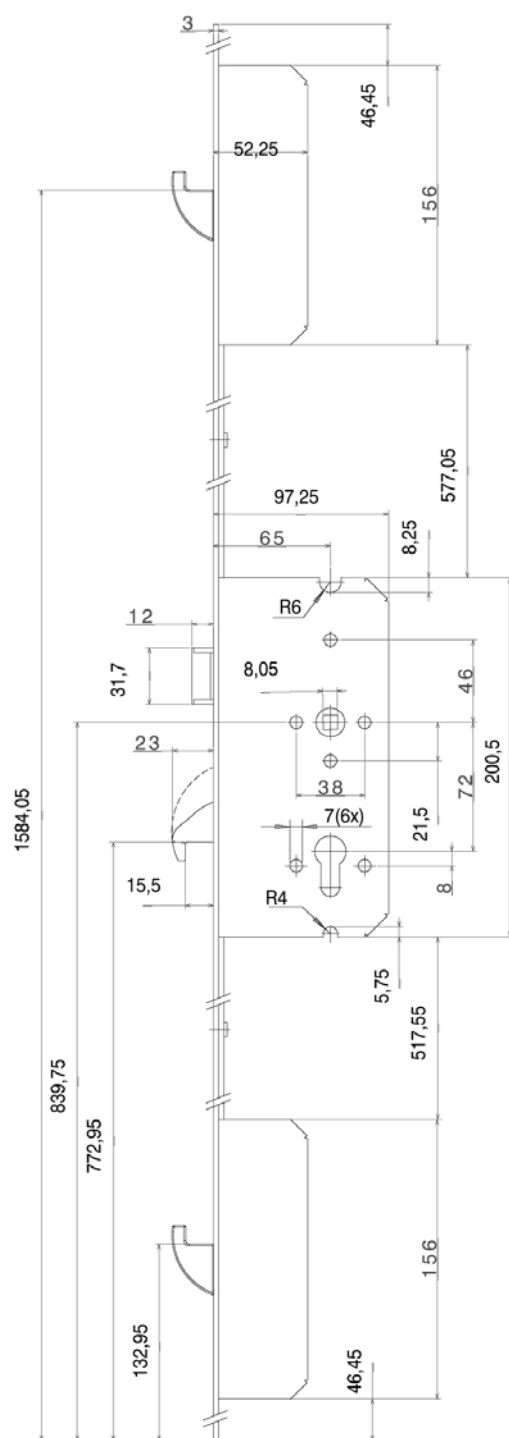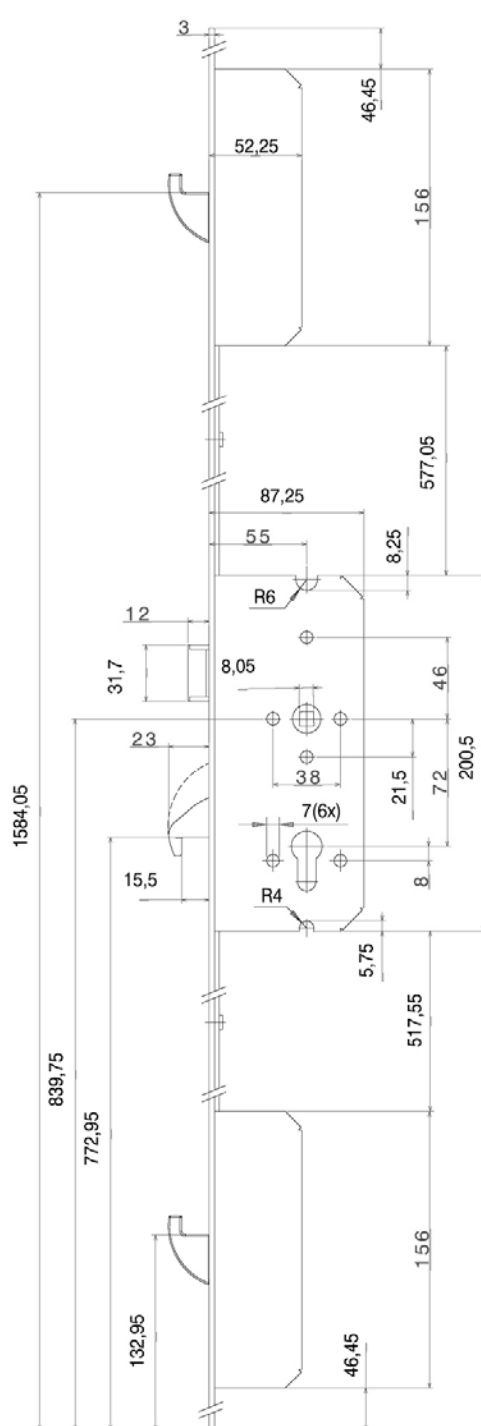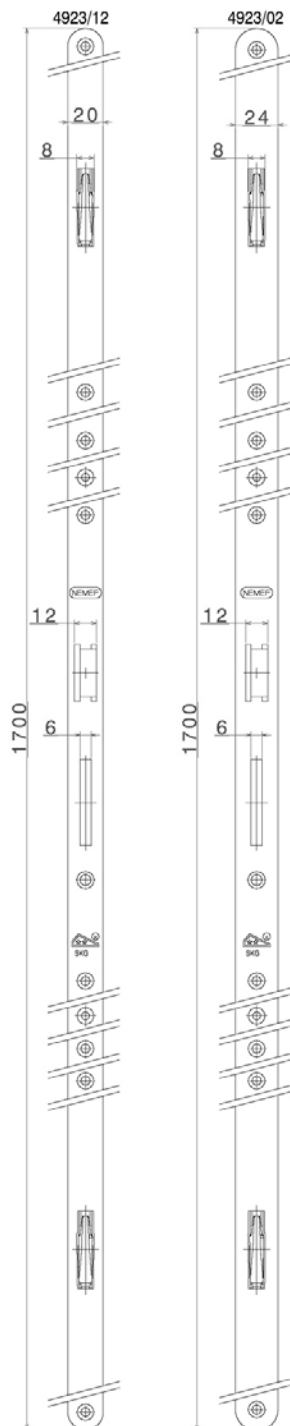

CI/SfB		
31/59	Xt 7	
September 2007		

DE4926/02/55

DE4926/02/65

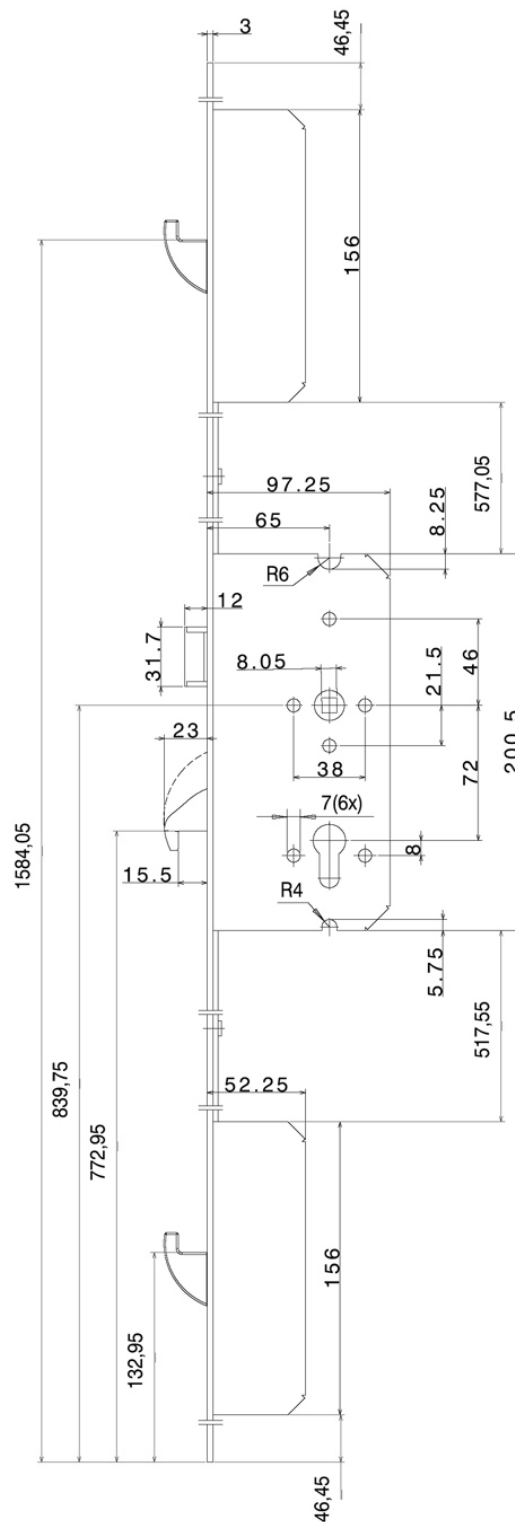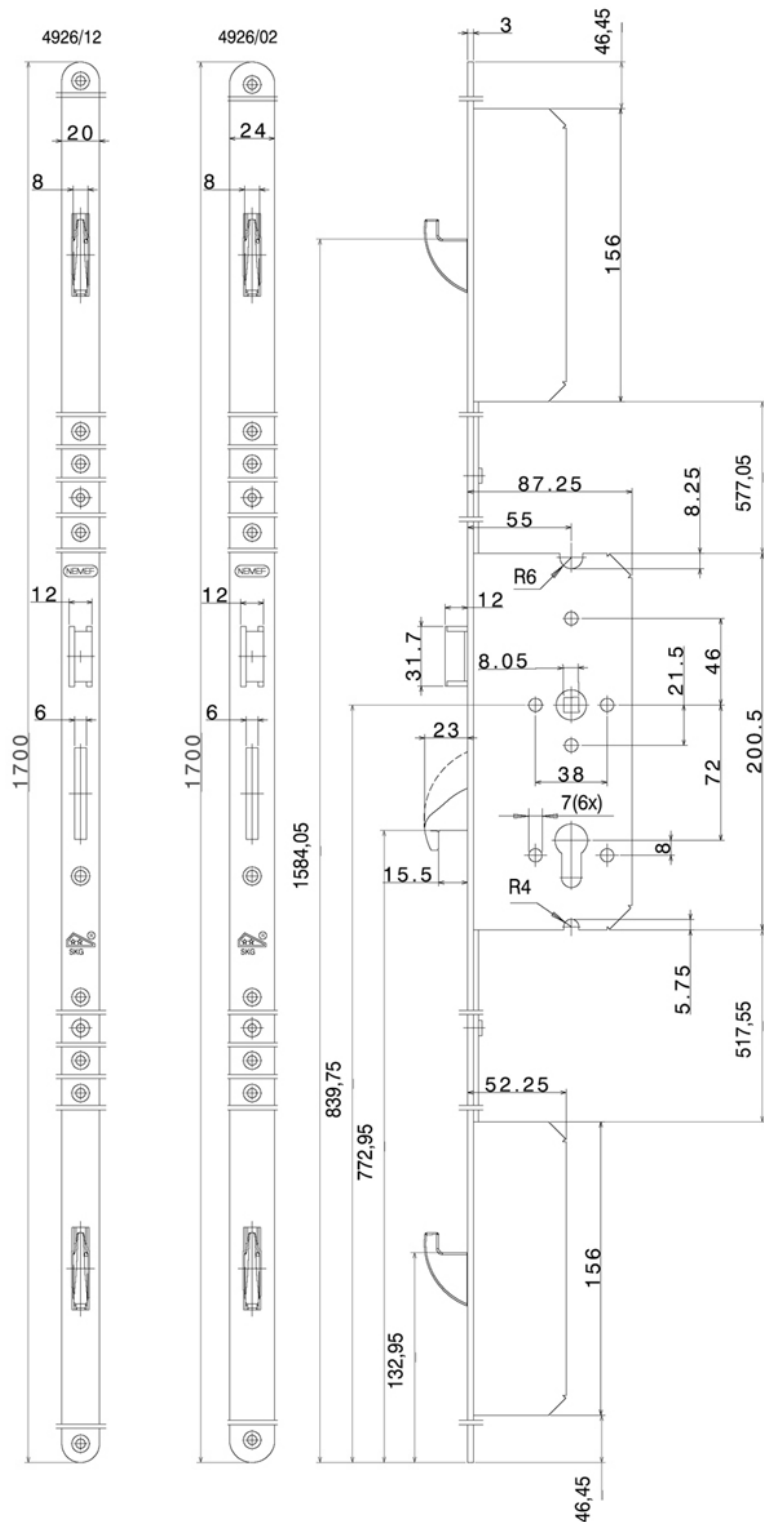

CI/SfB			
	31/59	Xt 7	
September 2007			



## **D&E hook spindle - DESP5001/65**

For use on applications where a lever is installed on one side of the door only. The hook is secured by tightening the grub screw located down the centre of the spindle.

DESP5001/65 hook spindle - 65mm

Door thickness: 50 - 55mm

Diameter: 8mm

Supplied complete with allen key.

*Suitable for use with any D&E lockcase with an 8mm through follower.*



## **D&E half spindle - PVCu handles**

For use with PVCu handles with a bolt through fixing - lever / offset lever or pad.

DESP5011/55 half spindle - 55mm

DESP5011/65 half spindle - 65mm

DESP5011/75 half spindle - 75mm

Diameter: 8mm

Supplied complete with allen key.

*Suitable for use with any D&E lockcase with an 8mm through follower.*

## **D&E split spindle - DESP5002/100**

For use on applications where anti-panic locks with a 8mm split follower are installed.



DESP5002/100 split spindle - 100mm

Length: 100mm  
Door thickness: 54mm  
Diameter: 8mm

## **D&E split spindle - DESP5003/100**

For use on applications where anti-panic locks with a 9mm split follower are installed.

DESP5003/100 split spindle - 50 / 50mm

Length: 100mm  
Door thickness: 54mm  
Diameter: 9mm

## **D&E split spindle - PVCu handles**

For use with PVCu handles with a bolt through fixing - lever / lever or pad.

Primarily for use on nightlatch multi-point locks.



DESP5004/120 split spindle - 55 / 65mm

Length: 120mm  
Diameter: 8mm

## D&E Pitts mortice spindle

For use on applications where a set of levers or knob furniture is used which rely on the rose or backplate fixings to secure them to the door.

This spindle is highly recommended for use on handles for PVCu and Aluminium applications.




*DESP5005/150* 5mm pitts mortice spindle - 150mm

*DESP5007/150* 7mm pitts mortice spindle - 150mm

*DESP5008/150* 8mm pitts mortice spindle - 150mm

All above D&E Pitts mortice spindles will suit a door thickness of 90mm

## D&E spindle sleeve range.

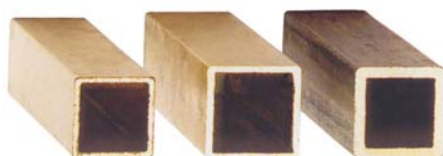

<i>DERBSL58</i>	spindle sleeve 5mm up to 8mm
<i>DERBSL67</i>	spindle sleeve 6mm up to 7mm
<i>DERBSL68</i>	spindle sleeve 6mm up to 8mm
<i>DERBSL78</i>	spindle sleeve 7mm up to 8mm
<i>DERBSL89</i>	spindle sleeve 8mm up to 9mm

Dimensions: 15mm standard length

Packaging: each

<i>DERBSL67/1</i>	spindle sleeve 6mm up to 7mm
<i>DERBSL68/1</i>	spindle sleeve 6mm up to 8mm
<i>DERBSL78/1</i>	spindle sleeve 7mm up to 8mm

Dimensions: 1 metre length

Packaging: each

## Notes

CI/SfB			
	31/59	Xt 7	
September 2007			

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Sales: 01733 896123



**L-1040**

Fax: 01733 894466

E&OE