

MADE-TO-MEASURE STAINLESS STEEL



- Sinks
- Worktops
- Cabinets
- Panels
- Doors
- Shelving

MADE-TO-MEASURE stainless steel sinks, worktops, cabinets, panels, doors and shelving are produced to meet your precise requirements and dimensions using GEC Anderson brushed satin finish stainless steel (EN 1.4301).

Options

- Textured finish stainless steel
- Patina finish stainless steel
- EN 1.4401 acid-resisting stainless steel



GEC Anderson worktops are MADE-TO-MEASURE in one continuous piece, to the exact shape and size prescribed and with NO JOINS at sink bowl(s), edges or upstands. Worktops are flat (not sloping or fluted) with 19mm bonded particleboard substrate, for strength, rigidity and ease of fixing. Installation is simple and rapid with no further work on site required. Simply screw fix from below.

- **Sink bowls** are positioned where required, in any combination or arrangement
- **Cut-outs** (eg. for tapholes, hobs, columns etc.) as required
- **Edge details** are specified by you depending on individual end-user needs and requirements
- **Maximum length:** 5 metres.
Maximum return for L-shapes and U-shapes: 2.3 metres
- **Maximum size for textured finish:** 2.4 x 1.15 metres

STAINLESS STEEL

- Legs** see page p6
- Cantilever Brackets** see page p6
- Base Cabinets** see page p7
- Doors** see page p7
- Splashbacks** see page p7

Product Specification Data
Please read in conjunction with GEC Anderson brochure: Sinks, Worktops, Cabinets, Shelving & Sanitaryware

SINK BOWLS

Sink bowls are welded into worksurface – exactly where required and in any position or combination – with no joins.

Special sizes are also available.

Sink bowls can be supplied individually (eg. to inset or undermount).

When selecting sink bowls and combination units, please note:

- **Minimum distances/ spaces required:**
 - From any edge to bowl: 35mm (70mm when mounted on stainless steel legs)
 - Between two or more single bowls integrated into same worktop: 35mm
 - For tapholes: 80mm
- **Manufacturing tolerances:** ± 2mm
- **Bowl sizes:** provided as internal measurements excluding flange
- **Non-standard sizes available to order**
- **Depth:** Measured at deepest point by outlet. Bowls slope towards outlet
- **Outlets:**
 - **Standard:** Ø89mm with basket strainer waste (BSW) and overflow (except for T10, V211 and LR25: Ø38mm)
 - **Option:** Ø38mm plug-waste and overflow

KEY

10 12 14 20 30

Flange widths vary and are shown for inset bowls (type A) only
NB. IS11 and IS21 have self-rim edge

- ⊗ Overflow position
 - ⊗ Optional overflow
 - 🧪 Available in EN 1.4401 acid-resisting grade stainless steel
 - ⌒ Hemispherical bowl
- All dimensions in millimetres


FIXING OPTIONS FOR BOWLS SUPPLIED INDIVIDUALLY

Above surface


A or C – including fixing clamps

Below surface


B – no fixing clamps



A Above surface (Inset or Flushmount)



B Below surface (Undermount)



C Above surface (50mm bevelled flange)


SINGLE BOWLS

 LR25 (Ø250 x 125) 20	 LR31 (Ø313 x 150) 30	 V211 (Ø300 x 130) 20	 LR38 (Ø380 x 160) 30
 LE30 (300 x 344 x 175)	 LE34 (340 x 400 x 180) 14	 LE34S (340 x 400 x 180)	 LE35 (350 x 400 x 165)
 LE48 (480 x 400 x 180) 14	 LE48D (480 x 400 x 250)	 LE50 (500 x 400 x 200) 30	 BE50 (500 x 400 x 200) 30
 T29 (290 x 400 x 165)	 T22 (220 x 400 x 170)		
 T18 (180 x 380 x 160)	 LE18 (180 x 400 x 130) 12		
 T15 (150 x 344 x 120)	 T10 (100 x 250 x 125)		


EXAMPLE COMBINATIONS

 K30 (T15 + LE30)	 K34 (LE18 + LE34)
 K50B (T29 + BE50)	 K518A (T18 + LE50)
 K518B (T18 + BE50)	 LD34 (2 x LE34)
 LD50 (2 x LE50)	 BD50 (2 x BE50)


A SERIES




A17 (170 x 400 x 170) **20**




A34 (340 x 400 x 200) **20**




A40 (400 x 400 x 200) **20**




A45 (450 x 400 x 200) **20**



A50 (500 x 400 x 200) **20**




A55 (550 x 400 x 200) **20**





A70 (700 x 400 x 200) **20**



SUGGESTED DOUBLES AND COMBINATIONS (Slop sink available to left or right of main bowl!)

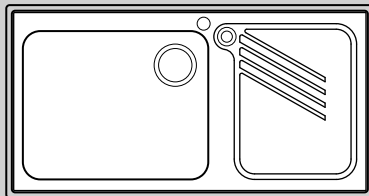


IS11L Bowl: 500 x 400 x 190
Drainer recess: 330 x 420
Overall: 945 x 470
(As inset: 985 x 510)
Partition: 60mm

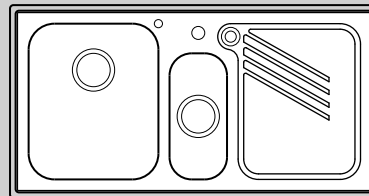


IS21L Bowls: 350 x 420 x 190
and 155 x 340 x 120
Drainer: 330 x 420 Overall: 945 x 470
(As inset: 985 x 510)
Partitions: 30mm




K1734 Bowl: 340 x 400 x 200
Slop sink: 170 x 400 x 170
Overall: 545 x 400
Partition: 35mm




K1750 Bowl: 500 x 400 x 200
Slop sink: 170 x 400 x 170
Overall: 705 x 400
Partition: 35mm




AD34 Bowl: 340 x 400 x 200 each
Overall: 715 x 400
Partition: 35mm

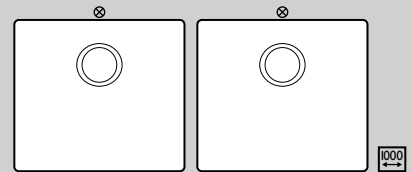

AD45 Bowl: 450 x 400 x 200 each
Overall: 935 x 400
Partition: 35mm

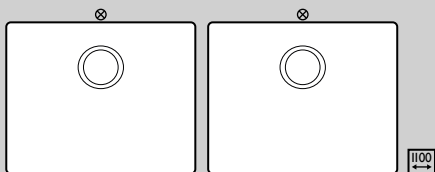

AD50 Bowl: 500 x 400 x 200 each
Overall: 1035 x 400
Partition: 35mm

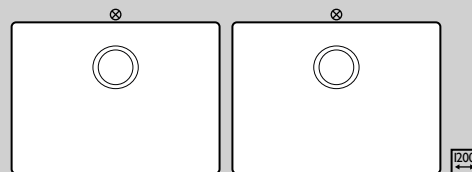

AD55 Bowl: 550 x 400 x 200 each
Overall: 1135 x 400
Partition: 35mm

WET ZONES

Lipped perimeter edges (edges 3, 2, 5 or 4) are recommended in wet areas. Alternatively, 'wet zones' can be created within worktops.






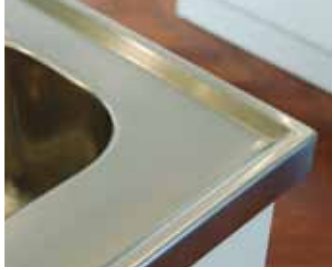








Shallow Recess (any size).
With or without fall.



Extended Edges (profiles 3 and 2) produce flat wet zone.



BOSS Raised pattern to facilitate drying, prevent scratching, withstand hot pans.




FRONT/SIDE	SIDE/BACK	BACK/SIDE	
Edge 3 (Standard height 30mm) 	Edge 2 (Standard height 30mm) 	Edge 1 	
Edge 5 (Standard height 25mm) 	Edge 4 (Standard height 25mm) 		
Edge 7 (Standard height 20mm) 	Edge 8 (Standard height 20mm) 	Edge 6 	

EDGE DETAILS




Edge details can be specified by you in various combinations, depending on individual end-user requirements and to ensure correct installation.

- Available as drawn (standard edges) or with varied dimensions (minimum 15mm, maximum height 100mm)
- 18mm waterproof particle-board core is standard. Increased board thickness available unless precluded by unit size or weight
- With stainless steel legs, add 20mm to standard worktop thickness

Other edges available, see website or contact us for further details.

UPSTAND		
Edge 10 (30-100mm high) 	Edge 10R (30-100mm high) 	

INSET	HTM63	
 Special edge detail, with watersafe profile, to allow tops to be inset into other work-surface materials. Clamps supplied for fixing.		

SOLIDTOP™		
6.0mm solid stainless steel 		

All drawings scale 1:2 except HTM63 scale 1:4

PANELS AND SPLASHBACKS

PANELS AND SPLASHBACKS

GEC Anderson stainless steel panels and splashbacks are available in any size or shape and offer a durable, hygienic, easy to clean and attractive alternative eg. to tiles or painted finishes.

Stainless steel door and drawer-fronts are also available (see page 7).

- Folded edges (10, 13, 17 or 20mm) with waterproof particleboard backing
- Standard sheet sizes up to: 3 x 1.5 and 4 x 1 metres


Options

- Flat sheet available (backed or un-backed)
- Cut-outs (eg. for electrical points) are available as required



SHELVING SYSTEM

V90

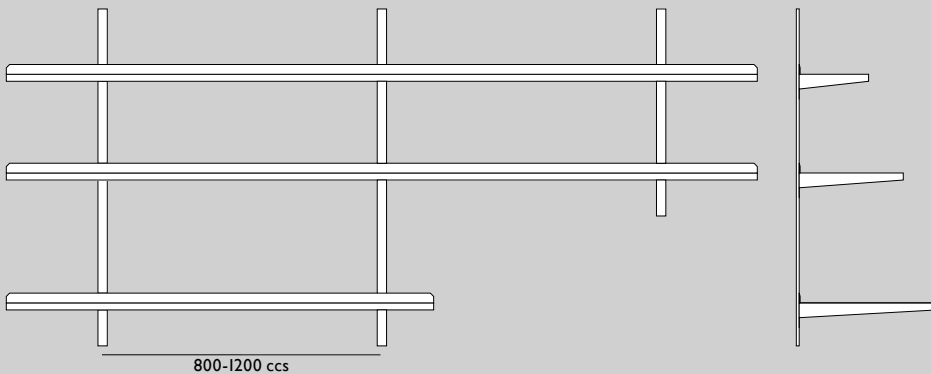


SHELVING

The unique GEC Anderson V90 shelving is a wall-fixed, 3-part stainless steel system providing versatile, flexible, attractive and hygienic open-storage suitable for many uses and environments. All components (shelves, uprights and brackets) are available individually and can be configured as required. Brackets locate to stepless and continuous (unslotted) uprights with a single clamp-screw. Shelves are solid.


- Maximum shelf length: 4.0 metres
- Standard shelf widths: 200, 300, 400, 500mm
- Uprights: 400, 600, 800, 1000, 1500, 1800, 2000mm. Recommended upright spacing: 800 – 1000mm
- StorTidy modules based on the V90 system are available in standard sets (see GEC Anderson Stainless Steel Sanitaryware)

Options

- Perforated shelves
- Barred shelf

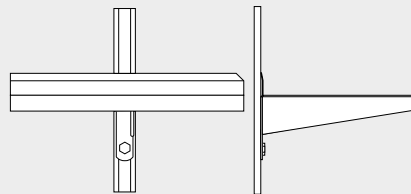

LEGS

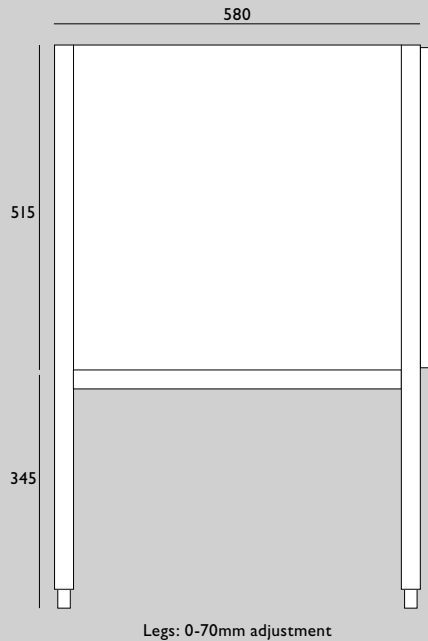

Legs: 0-70mm adjustment



LEGS

GEC Anderson stainless steel legs provide high weight capacity, durable and practical free-standing stainless steel worktops. They can also be supplied on their own (eg. for other worktop materials).

- 30 x 30mm square-section tubular brushed satin stainless steel legs
- Ø8mm barred shelf with 25 x 25mm perimeter frame
- 0 – 70mm manually adjustable plastic feet

Options

- Solid shelf
- No shelf
- Multiple shelves
- Chrome-plated feet (eg. for high fire-risk areas)
- Motorised, hydraulic adjustment system (+ - 300mm) for rapid and reliable multi-height units
- Braked castors (zinc-coated steel: Ø125mm rubber tyre. Overall height: 160mm)
- Special fixings (eg. floor-fixing plates) and clearances (eg. for pipework) on request

CANTILEVER BRACKETS

GEC Anderson stainless steel cantilever brackets provide medium weight capacity wall-mounted support to surfaces. Uninterrupted floor access eg. for cleaning and flexible storage spaces is a clear benefit when compared to free-standing units.

- 30 x 30mm square section tubular brushed satin stainless steel with 20 x 20mm cross brace
- Recommended spacing: 800 – 1000mm


Option

- Lower shelf prong




CANTILEVER BRACKETS



V21

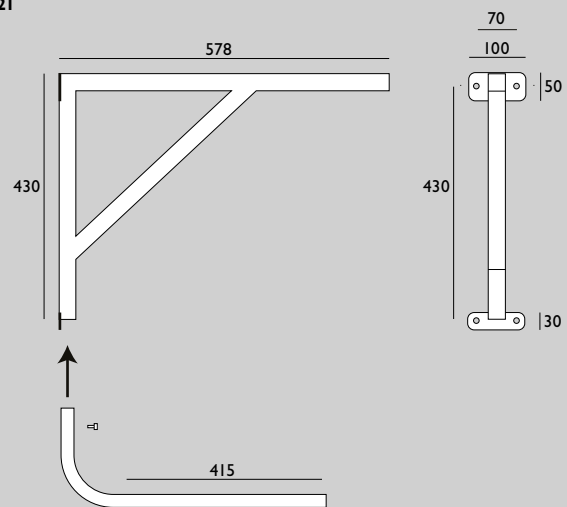

V22 (with optional undershelf support)

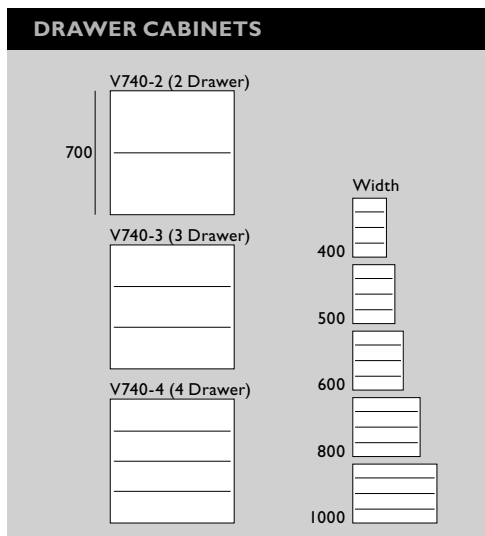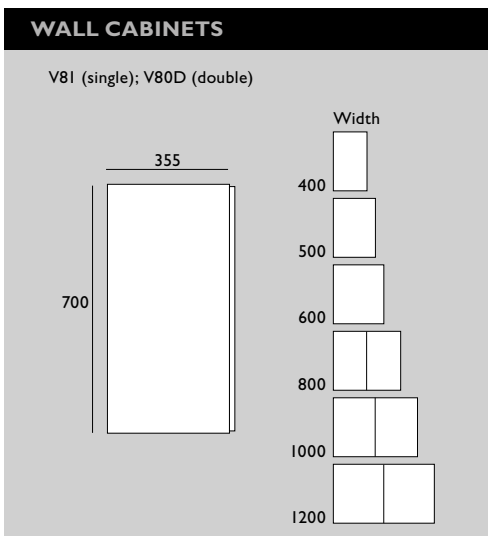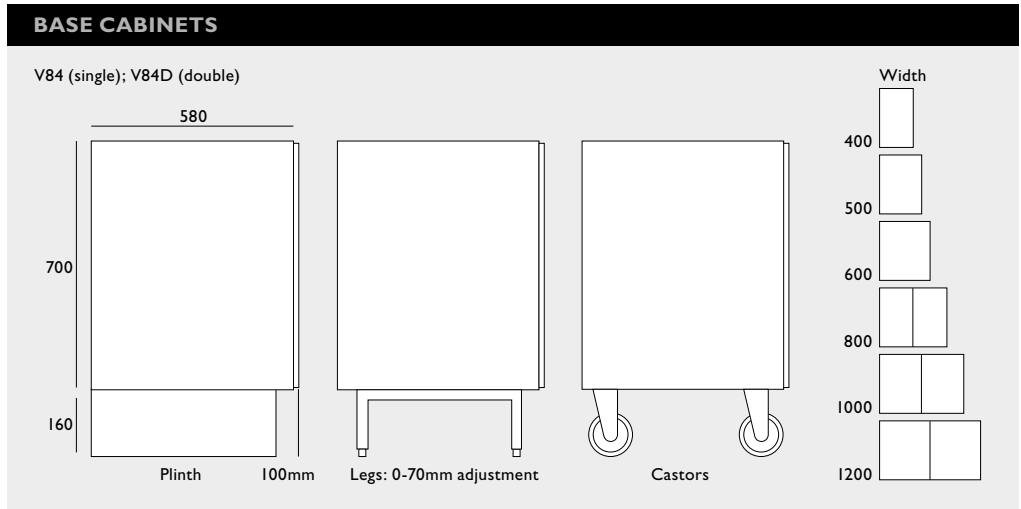

CABINETS

GEC Anderson stainless steel base cabinets, drawer cabinets and wall cabinets provide sleek, robust and hygienic storage suitable for many environments and offer good stability and sound absorption. Base cabinets and wall cabinets have one vertically adjustable shelf. Plain doors with stainless steel 'D' handle are standard.

Doors are ultra-durable with double-skin construction and fully adjustable, high quality, quick-release, hinges. Drawers have smooth and accurate roller-bearing runners. Damped-action closing is standard.

Options

- Continuous, integral, recessed handles (vertical or horizontal)
- Excluding handle (eg. for use with hardware, by others)
- Handleless with back-slope edge to doors
- Key-operated lock
- Fire-retardant core for fire-sensitive areas
- Individual drawers are available (eg. for mounting below worktops)
- Glass (clear, frosted, wired) door with stainless steel frame
- Non-standard sizes


Mounting

- Wall-fixed with up to 100mm clearance eg. for clearance of pipes and or cleaning
- Within GEC Anderson stainless steel legs
- Free-standing with adjustable feet and optional plinth
- Braked castors (zinc-coated steel): Ø125mm rubber tyre. Overall height: 160mm for mobile units


DOORS AND DRAWER FRONTS

Stainless steel doors and drawer fronts are available separately for use with cabinets, by others. Simply specify size and handle choice. Doors are supplied with hinge cut-outs, as required.

HANDLES

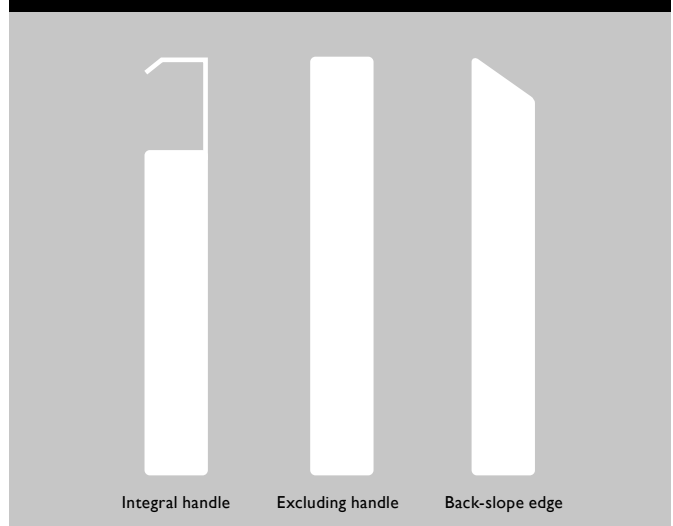

HINGE HOLES



Prepared for standard and non-standard hinges.



**COMPREHENSIVE,
PROFESSIONAL, FRIENDLY
AND EFFICIENT SUPPORT**

- **Technical advice and design guidance**
Available when you need it, regardless of project scale.
- **Rapid product specification and quotation**
Assisting you with meeting deadlines and to safeguard specifications.
- **Secure ordering procedures**
For added assurance and peace of mind.
- **Pre-production CAD drawings**
For clarity, time-saving and added assurance.
- **Dependable, on-time and co-ordinated deliveries**
Helping you to avoid costly delays and adhere to work-programs.
- **Measuring and installation service**
Let us take care of it for you.
- **Cleaning and maintenance guidance**
Full instructions and back up, including the E-cloth® system.
- **Technical product literature**
Carefully designed for clarity and ease of reference.
- **www.gecanderson.co.uk**
Comprehensive product data; case studies and examples; news items; specification clauses and CAD drawings.

Please contact us if we can help you in any way!

ORDERING

Standard products
Often available from stock. Simply provide product reference; quantity required.

Special products
Made to order.

- Please specify your requirements and/or refer to us for quotation and specification
- Upon receipt of order, we will issue our pre-production drawing to you, for approval
- A site visit will be arranged and dimensions and templates will be taken if GEC Anderson is installing for you
- As soon as your approval is obtained, your order will be placed into production
- We will confirm your order, in writing, to you with a confirmed delivery date
- Delivery, to the location of your choice, will be arranged and coordinated
- Installation will be pre-arranged where appropriate

Please indicate any delivery requirements or instructions.

Please ensure safe disposal of packaging.

For clarity and to minimise risk of errors, we ask for orders, in writing please.

INSTALLATION AND MAINTENANCE

Leave plastic surface protection in place until installation is complete. GEC Anderson recommends the E-cloth® system. Alternatively, wash with cold water and detergent. A fine scouring powder will remove persistent stains. Do not use coarse abrasive cleaners or bleach! Strong acids can mark and pit stainless steel.

OTHER PRODUCTS FROM GEC ANDERSON

SANITARYWARE
A comprehensive range of safe and highly durable stainless steel sanitary appliances

DECIMETRIC®
Professional quality, modular kitchen furniture system

'The detailing for the sink area was a crucial element of the overall kitchen design. GEC Anderson was the only supplier able to create exactly what we were looking for and the client was delighted with the final result.'

Mark Levy, Northpoint Design



GEC Anderson Limited Oakengrove Shire Lane Hastoe Tring Hertfordshire HP23 6LY
Tel +44 (0)1442 82 6999 Fax +44 (0)1442 82 5999 info@gecanderson.co.uk www.gecanderson.co.uk