

axis

Automatic Entrance Systems


STANLEY.

7600 Series

ICU DOOR SYSTEM




105 degree Hold Open Closer - When swing door panel is pushed past 105 degrees, the door panel will stay open in either direction allowing for easy access and hands-free operation.



Top Door Guide - Track follows the inside header and guides bi-fold panels. When released enables full-breakout in either direction.



ICU Door Handles - The 7600 Series ICU door package provides three easy-to-use ICU door handles on the bi-fold panels and a push bar on the swing door.



Flush Bolt - Located on the end stile of the bi-fold door, the flush bolt is used to quickly and easily release and connect the top door guide during times of full-breakout.







Adjustable Bottom Pivots (both sides) - both sides of the 7600 Series ICU door package, the adjustable bottom pivots allow the door panels to be correctly altered to allow for changes in floor height or floor type (carpet / tile / etc.) and allows them to level doors.



Grounding Strap - Provided between the two bi-fold panels, the grounding strap eliminates static build-up and ensures safe operation of hospital professionals at all times of the day.

Designed to meet the needs of the hospital intensive care and cardiac care units (ICU/CCU). This product has been engineered for use in intensive care units and cardiac care units in hospital facilities. Exciting features include; easy-to-use manual bi-fold and manual swing door in a sleek, single-header package, wide clear door opening, easy, trackless, bi-directional egress of equipment and hospital beds, and narrow header thickness.

TECHNICAL SPECIFICATIONS

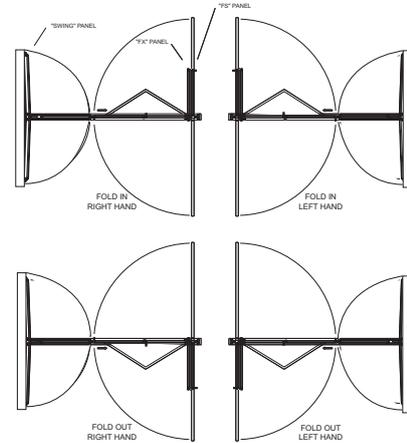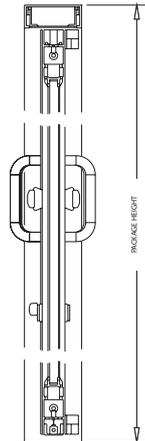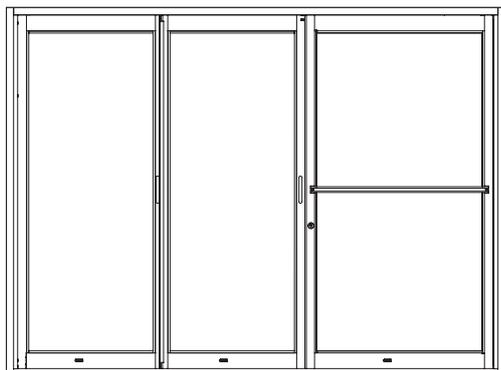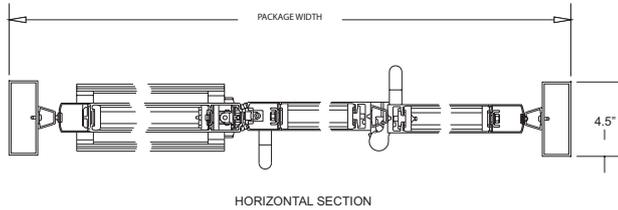

Door packages are custom manufactured to fit your requirements

- Header Size: 1.75" X 4.5"
- Package Height Range: Minimum 90" (7ft 6in), Maximum 96" (8 ft)
- Package Width Range: Minimum 84" (7ft), Maximum 120" (10 feet)
- Typical Package: 84" (7ft) will offer 64" (5ft 4in) Clear Door Opening

| Package Size* | Clear Door Opening** | Swing Door Choices |
|----------------|----------------------|--|
| 7 foot (84") | 63 3/4" | 36" (standard) 42" (standard) 48" (standard) |
| 8 foot (96") | 75 3/4" | 36" (standard) 42" (standard) 48" (standard) |
| 9 foot (108") | 87 3/4" | 42" (standard) 48" (optional) |
| 10 foot (120") | 99 3/4" | 48" (standard) (can be used on any size) |

* Minimum package size width 7ft. - Maximum package size width 10ft.
** Clear Door Opening is calculated as the following: CDO = package width - 20 1/4"

FEATURES AND BENEFITS



Flush Bolt - Located on the end stile of the bi-fold door, the flush bolt is used to quickly and easily release and connect the top door guide during times of full-breakout.



Adjustable Bottom Pivots (both sides) - Offered on both sides of the 7600 Series ICU door package, the adjustable bottom pivots allow the door panels to be correctly altered to allow for changes in floor height or floor type (carpet / tile / etc.) and allows them to level doors.



Top Door Guide - Track follows the inside header and guides bi-fold panels. When released enables full-breakout in either direction.



Grounding Strap - Provided between the two bi-fold panels, the grounding strap eliminates static build-up and ensures safe operation of hospital professionals at all times of the day.



ICU Door Handles - The 7600 Series ICU door package provides three easy-to-use ICU door handles on the bi-fold panels and a push bar on the swing door.



105 degree Hold Open Closer - When swing door panel is pushed past 105 degrees, the door panel will stay open in either direction allowing for easy access and hands-free operation.



Axis Automatic Entrance Systems Ltd

Unit 6, Queens Park Industrial Estate, Studland Road, Northampton, NN2 6NA.

Tel 0844 504 6525 Fax 0844 504 6526

Service 0844 504 6535 Fax 0844 504 6536

Sales 0844 504 6545 Fax 0844 504 6546

Email: sales@axisautomatic.com www.axisautomatic.com

