

Optimum 2000

Platform Lift for goods



Optimum 2000 ideal for goods transportation

About the Optimum 2000

The Optimum 2000 Goods Lift is a high quality, reliable, vertical platform lift that is supplied complete with its own small footprint enclosure. This is a self-supporting platform lift which will enhance the value of any building. Installation costs are kept to a minimum ensuring excellent value with a low ownership cost. The 0.55kw energy efficient motor uses 75% less energy than other models of platform lifts. The unit is compliant with Part M of the Building Regulations.

Standard Features

- Code Compliance – MD 2006/42/EC
- Testing – Fully load tested, CE marked
- Maximum Travel – Up to 15m
- Floors served – Up to 6
- Entrance Door – On three sides with either hand hinging
- Platform Size – 1120mm wide x 1480mm long (see table for other sizes)
- Footprint – 1250mm x 1560mm long
- Floor Recess – 60mm or ramp
- Enclosure – Modular self supporting
- Drive System – Guided Chain
- Speed – 0.15m/s
- Warranty – 12 months parts and labour, 5 years on motor and gearbox and 10 years on drive chains
- Capacity – 500kg
- Finish – Powder coat RAL 9010
- Power Supp. – 240v, single phase, 16 amp
- Recommended use – secure and evenly distributed loads
- Controls – call and send at landings
- Manual door (optional auto doors)





Optimum 2000 shown with 60mm ramp in lieu of pit

Installation

The Optimum 2000 Goods Lift requires little in the way of building works with a 60mm deep pit, a 1590mm x 1280mm vertical hole through the building and a 16 amp power supply to the top floor being the only necessities for most installations to be carried out.

This unit comes complete with it's own scaffolding and there is no need to install lifting beams.

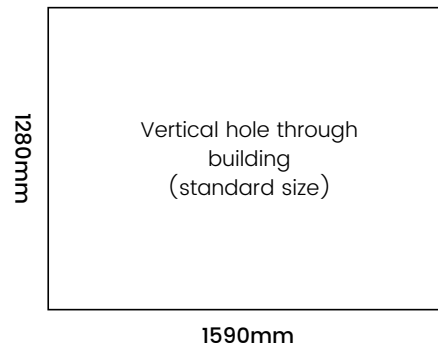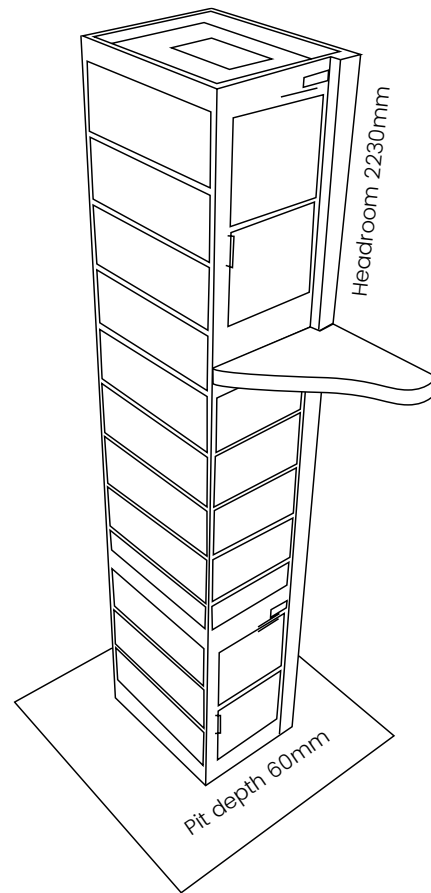

Range of Door Designs



Glazed half height



Steel door with vision panel and fire rated option



Fully glazed door with fire rated option

Range of Sizes

Platform Size	Vertical Hole
1020x1480	1180x1590
1020x1680	1180x1790
1120x1480*	1280x1590*
1120x1680	1280x1790
1220x1480	1380x1590
1220x1680	1380x1790

*Standard size. Special sizes available on request.