



Optimum 350

Open Low Rise Platform Lift

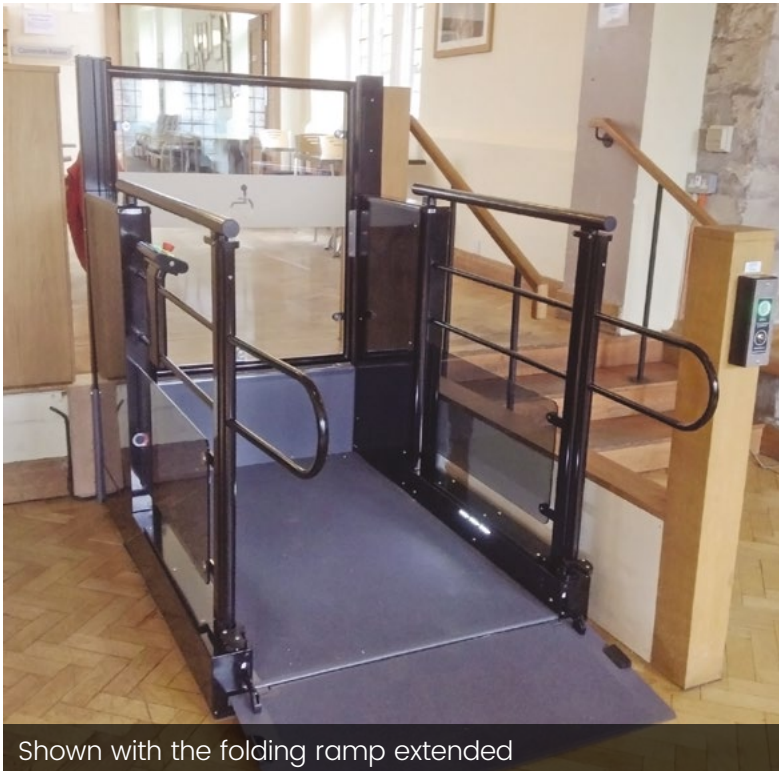

Shown with the folding ramp extended

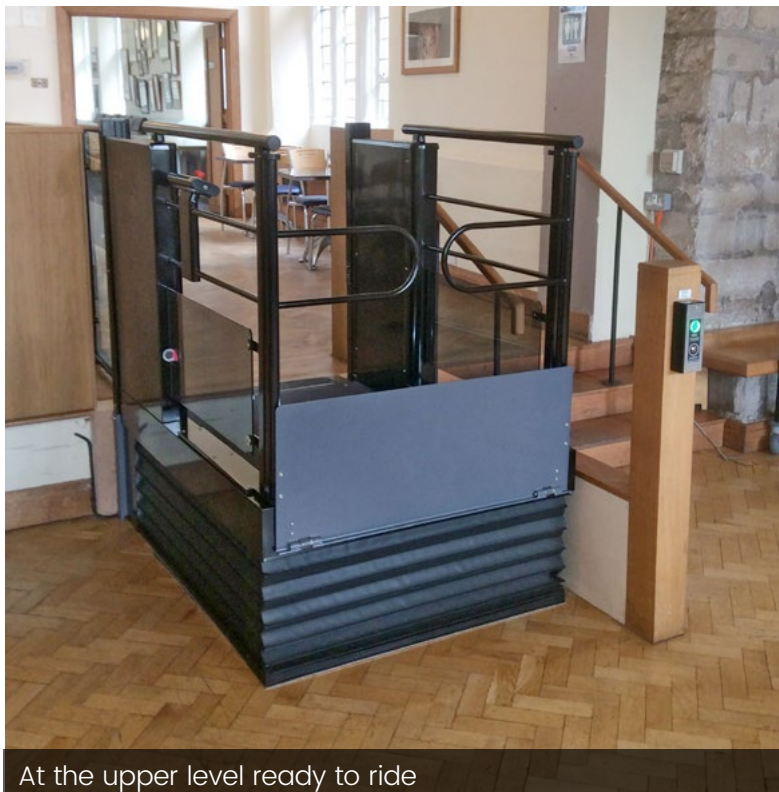

At the upper level ready to ride

About the Optimum 350

The Optimum 350 is a high quality and reliable hydraulic platform lift designed to work internally or externally for heights from 25cm to 1m.

It comes complete with its own self supporting structure and has a side opening toughened glass gate at the upper level.

The Optimum 350 has a safety ramp fitted to the platform that will automatically fold up when the lift moves. It is also available with an optional platform barrier gate.

Standard Features

- Platform Sizes – 3 models available
- Travel – from 250mm to 1000mm
- Ramp – Automatic power fold style
- Capacity – 300kg
- Gate – Hinged at the upper level
- Travel Speed – 20mm/s
- Colour – Bleu 700 Sable
- 5 year anti corrosion warranty
- 240v electrical supply
- Emergency raise and lower facility
- Post mounted push controls
- Arrival Gong and alarm
- Tactile Buttons



Available Options

- Post mounted remote landing controls
- Arrival chimes
- Upper gate with steel or glass infill panel
- Power Operated Upper Gate
- Bridging system (to span existing steps)
- Full height perspex side panel(s)
- Glass side infill panels (both sides)
- Heavy duty power supply (depending on model)
- Special lift colour RAL, Akzo Nobel, BS (excl. plat. ramp & end panel)
- Voice annunciation & platform level indication



Available sizes

PLATFORM SIZE	FOOTPRINT SIZE
1450mm x 800mm	1945mm x 1004mm
1450mm x 900mm	1945mm x 1104mm
1450mm x 1100mm	1945mm x 1304mm

Technical drawing

