



waterlogic 4

Waterlogic 4



Intelligent design

Combining functionality with sleek, intuitive design, the Waterlogic 4 provides dramatically advanced water purification capabilities alongside unrivalled aesthetics.

Intelligent water

The Waterlogic signature approach to refreshment purity takes three stages; Carbon Filtration, UV Purification and BioCote® antimicrobial protection and gives the re-assurance of total hygiene both inside and out. The Waterlogic 4 also breaks new ground in that all cold and sparkling water has the maximum Class A UV treatment, giving the purest water.

Features:

- 2 stage carbon filtration (A)
- HC2P technology (B)
- Class A UV (C)
- Firewall technology (C)
- Drip tray sensor
- BioCote® antimicrobial protection

Freestanding or table top models:

- Hot cold and sparkling
- Hot and cold
- Cold and sparkling
- Cold



ANTI MICROBIAL PROTECTION



CARBON FILTRATION



FIREWALL UV PURIFICATION



HC²P



CLASS A UV



Firewall technology

Smart repositioning of the UV lamp at the point of dispense, permits cold and sparkling water to pass through the UV system just before being dispensed into your cup. The patented Firewall design also eliminates the problem of back contamination from outside the machine that may affect the water.

Class A UV

UV light is a most effective killer of bacteria and viruses when used at a wavelength of 253.7nm (nano-meters). To guarantee total water purity, the dosage of UV light must be equal to 40,000 uWsec/cm² (40 mJ/cm²). This dosage factor is a calculation of the intensity of light and the contact time with the treated water and is the fundamental requirement for claiming Class A purification.

HC2P technology

The new patented Waterlogic HC2P (High Capacity Cold Purification) technology achieves a pinnacle in both capacity of cold water production and purification of this water. HC2P provides twice the capacity of other Waterlogic models.

Available on selected models.



Biocote®

Biocote® is antimicrobial technology that is incorporated into Waterlogic watercoolers and inhibits the growth of micro organisms on the coolers surface.

Specifications

Certifications	NSF & CE & WQA approved
Warranty	1 year manufacturer, up to 5 years Total Care
HCS	35kg
HC	27kg
CS	34kg
C/CA	26kg
Standard filtration	1 x GAC and 1 x CBC
UV Lamp	UV Lamp 11w TUV lamp
	Sensor alarm activated when UV not meeting Class A
	Firewall technology - Repositioning of the UV lamp to point of dispense to ensure no bacteria in or out
Hot tank	Hot tank Capacity - 1.5 litres
	Heater - 800w
Cold tank Capacity	5 litres on cold/sparkling and hot, cold and sparkling models
Compressor	114w
Refrigeration Gas	R134a 75g
Pump	12w (Sparkling versions only)
Drip Tray	Drip Tray: Sensor activates when tray is full
	Optional drainage
Heat Detection	
Leak Detection	

Technical Information

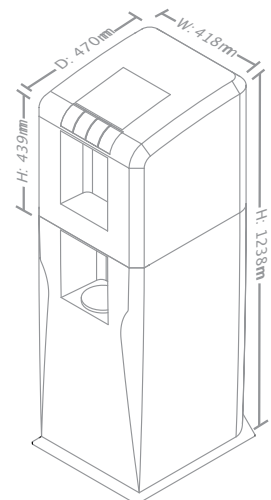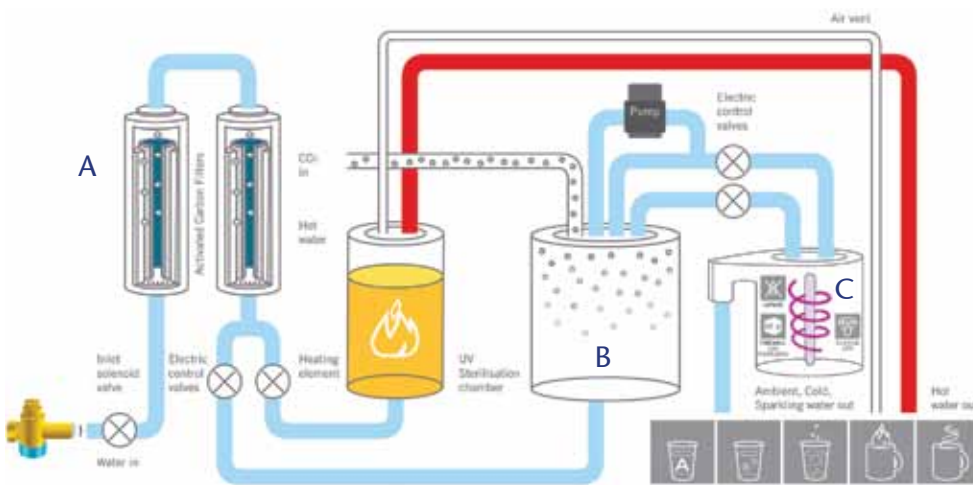

For more information call
01252 852260
waterlogicinfo@phs.co.uk
www.phswaterlogic.co.uk



Totalcare
 With our totalcare package, it's all included