

WL2000



Everyone is health conscious these days. So, you want your staff, customers and visitors to have access to high quality drinking water – but you don't want any hassle. We can offer a refreshingly simple answer: **The WL 2000.**

The WL 2000 mains-fed water dispenser, delivers a constant supply of the highest quality drinking water, offering great tasting water compared to bottled water coolers and other mains fed dispensers.

The WL 2000, unlike bottled water coolers, is mainsfed so it does away with the problems of storage, lifting heavy water bottles, degradation and sanitisation, not to mention running out.

Features:

- Direct Chill Technology
- 1-micron carbon filtration
- Large drip tray (1.4 litre capacity)
- BioCote® Antimicrobial protection

For more information call
01252 852260
waterlogicinfo@phs.co.uk
www.phswaterlogic.co.uk

the Intelligent choice



ANTI MICROBIAL PROTECTION



DIRECT CHILL



CARBON FILTRATION

WL2000

Specification


Size H:1020 x W:345 x D:365mm
(freestanding model)

Capacity 60 cups per hour

Colours Silver/Charcoal grey

Options Cold only, freestanding
or tabletop

Weight WL 2000 cold only freestanding:22kg
WL 2000 cold only table top: 20kg

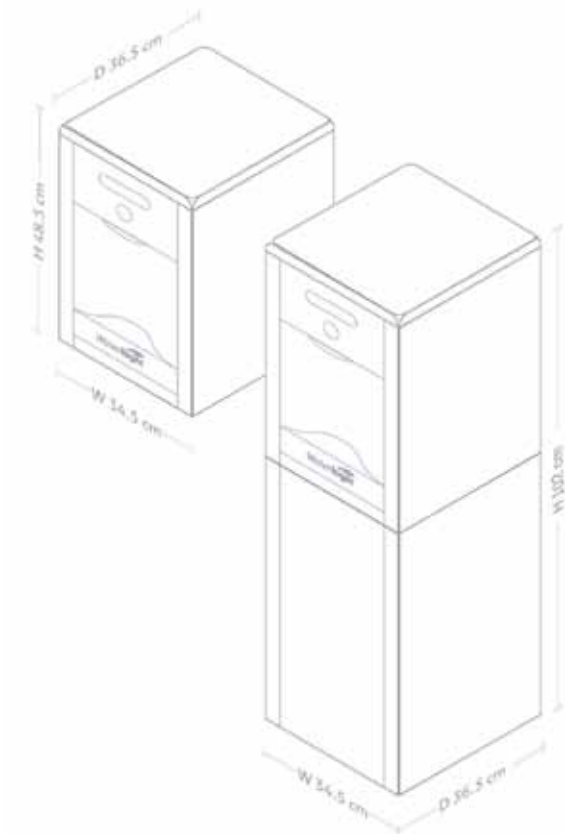

Installation Requirements

To ensure that the Waterlogic machine can be installed quickly and smoothly in your proposed location, each machine will require a 13 amp (240 AC) switched socket which should not be more than one metre from the machine. Each plumbed water machine needs to be supplied with water from a rising main. Machines cannot be connected to a storage tank water supply. The pipe work should ideally be no more than one metre from the machine although our in-house service team are able to install machines in the majority of locations. Pipe work must be terminated with a 15mm BS1010 stopcock.

Technical Information

