

TECHNICAL SPECIFICATIONS

CODES and COLORS				INT.	REMOV.	WHEELS	INTERNAL DIMENSIONS (mm.)					EXT. DIMENSIONS (mm.)			WEIGHT	BUOYANCY	VOLUME
BLACK	ORANGE	MIL. GREEN	DES. SAND	CONFIG.	LID		L	W	D	LID	BASE	L	W	D	Kg.	*Kg.max	Litres
1908.B E	1908.O E	1908.G E		empty	---	---	190	125	85	20	65	216	180	102	0,70	1,4	2,0
1908.B	1908.O	1908.G		w/foam	---	---	190	125	85	20	65	216	180	102	0,80	---	---
1913.B E	1913.O E	1913.G E		empty	---	---	190	125	135	20	115	216	180	152	0,85	2,4	3,2
1913.B	1913.O	1913.G		w/foam	---	---	190	125	135	20	115	216	180	152	0,92	---	---
2209.B E	2209.O E	2209.G E		empty	---	---	220	160	95	20	75	246	215	112	0,88	2,3	3,3
2209.B	2209.O	2209.G		w/foam	---	---	220	160	95	20	75	246	215	112	0,99	---	---
2214.B E	2214.O E	2214.G E		empty	---	---	220	160	145	20	125	246	215	162	1,16	3,9	5,1
2214.B	2214.O	2214.G		w/foam	---	---	220	160	145	20	125	246	215	162	1,29	---	---
2712.B E	2712.O E	2712.G E		empty	YES	---	276	200	120	35	85	305	270	144	1,62	4,2	6,6
2712.B	2712.O	2712.G		w/foam	YES	---	276	200	120	35	85	305	270	144	1,83	---	---
2717.B E	2717.O E	2717.G E		empty	YES	---	276	200	170	35	135	305	270	194	1,93	6,7	9,3
2717.B	2717.O	2717.G		w/foam	YES	---	276	200	170	35	135	305	270	194	2,12	---	---
3317.B E	3317.O E	3317.G E		empty	YES	---	330	234	170	68	102	360	304	194	2,29	7,0	13,1
3317.B	3317.O	3317.G		w/foam	YES	---	330	234	170	68	102	360	304	194	2,51	---	---
3317W.B E	---	---		empty	YES	---	330	350	170	68	102	360	420	194	2,92	10,6	19,6
3317W.B	---	---		w/foam	YES	---	330	350	170	68	102	360	420	194	3,30	---	---
3818.B E	3818.O E	3818.G E		empty	---	---	380	270	180	45	135	410	340	205	3,14	12,4	18,4
3818.B	3818.O	3818.G		w/foam	---	---	380	270	180	45	135	410	340	205	3,58	---	---
4412.B E	4412.O E	4412.G E		empty	YES	---	445	345	125	47	78	474	415	149	3,40	10,7	19,2
4412.B	4412.O	4412.G		w/foam	YES	---	445	345	125	47	78	474	415	149	3,90	---	---
4412.B C	---	4412.G C		extra case	YES	---	445	345	125	47	78	474	415	149	4,20	---	---
4419.B E	4419.O E	4419.G E		empty	YES	---	445	345	190	47	143	474	415	214	4,00	19,7	29,2
4419.B	4419.O	4419.G		w/foam	YES	---	445	345	190	47	143	474	415	214	4,70	---	---
4820.B E	4820.O E	4820.G E		empty	---	---	480	370	205	50	155	520	435	230	4,64	24,7	35,5
4820.B	4820.O	4820.G		w/foam	---	---	480	370	205	50	155	520	435	230	5,40	---	---
5117.B E	5117.O E	5117.G E		empty	YES	---	517	277	173	50	123	546	347	197	3,80	15,8	24,7
5117.B	5117.O	5117.G		w/foam	YES	---	517	277	173	50	123	546	347	197	4,50	---	---
5122.B E	5122.O E	5122.G E		empty	YES	YES	517	277	217	50	167**	546	347	247	6,00	21,5	31,0
5122.B	5122.O	5122.G		w/foam	YES	YES	517	277	217	50	167**	546	347	247	7,00	---	---
5822.B E	5822.O E	5822.G E		empty	---	---	580	440	220	60	160	650	510	245	7,16	36,7	56,1
5822.B	5822.O	5822.G		w/foam	---	---	580	440	220	60	160	650	510	245	8,39	---	---
5823.B E	5823.O E	5823.G E		empty	---	YES	580	440	220	60	160	670	510	262	9,17	36,7	56,1
5823.B	5823.O	5823.G		w/foam	---	YES	580	440	220	60	160	670	510	262	10,40	---	---
5833.B E	5833.O E	5833.G E		empty	---	YES	580	440	330	60	270	670	510	372	10,54	62,0	84,2
5833.B	5833.O	5833.G		w/foam	---	YES	580	440	330	60	270	670	510	372	12,65	---	---
7630.B E	7630.O E	7630.G E		empty	---	YES	765	485	305	60	245	860	560	355	13,56	81,8	113,1
7630.B	7630.O	7630.G		w/foam	---	YES	765	485	305	60	245	860	560	355	16,39	---	---
7641.B E	7641.O E	7641.G E		empty	---	YES	765	485	415	60	355	860	560	460	15,02	118,5	153,9
7641.B	7641.O	7641.G		w/foam	---	YES	765	485	415	60	355	860	560	460	18,87	---	---
10840.B E	10840.O E	10840.G E		empty	YES	YES	1080	620	400	200	200	1178	718	427	19,80	120,6	260
10840.B	---	10840.G		w/foam	YES	YES	1080	620	400	200	200	1178	718	427	26,30	120,6	260
10840.B D1	---	10840.G D1		int.#1	YES	YES	1080	620	400	200	200	1178	718	427	25,00	120,6	260
10840.B D2	---	10840.G D2		int.#2	YES	YES	1080	620	400	200	200	1178	718	427	25,00	120,6	260
9413.B E	9413.O E	9413.G E		empty	---	YES	939	352	137	43	94	989	415	157	6,70	27,9	45,3
9413.B	9413.O	9413.G		w/foam	---	YES	939	352	137	43	94	989	415	157	7,70	---	---
11413.B E	11413.O E	11413.G E		empty	---	YES	1136	350	135	42	93	1189	415	159	7,80	33,3	53,7
11413.B	11413.O	11413.G		w/foam	---	YES	1136	350	135	42	93	1189	415	159	8,80	---	---
13513.B E	13513.O E	13513.G E		empty	---	YES	1350	350	135	42	93	1410	415	159	8,70	39,5	63,7
13513.B	13513.O	13513.G		w/foam	---	YES	1350	350	135	42	93	1410	415	159	9,95	---	---
13527.B E	13527.O E	13527.G E		empty	---	YES	1350	350	272	42	230	1430	415	296	11,70	97,5	128,5
13527.B	13527.O	13527.G		w/foam	---	YES	1350	350	272	42	230	1430	415	296	14,90	---	---

* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

** In models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.



Distributed by:



EXPLORER CASES by GT LINE s.r.l.
Via del Lavoro, 50/52 - 40056 Crepellano (Bo) - Italy
Tel. +39 051 65041 - Fax +39 051 734925
www.explorercases.com - salesinternational@gtline.com



REV. 2 CAT. GEN. EXPL. 07/11 5.000 EN

Content is not included. The information contained in this catalogue is indicative only. GT Line reserves the right at all times to incorporate modifications in the models described. In accordance with technical or commercial requirements. Any trademarks or logos are the property of their respective owners. Copyrights: Pag. 2: ARCTIC 2004 - PH LOUISE MURRAY, Pag. 3: 18: EVEREST EXPEDITION 2007 - PH MAC CHO OYO, Pag. 6, 10, 17: BERMAN WARY CONGRU DIVERS UNILC OPERATION - LEBANON 2007, Pag. 9: LISBAO-DNAAR - RALLY 2007, Pag. 13: SOMALIA STALO - NUCLEO ARIFICIER - VENEZIA 2010, Pag. 21: AQUATIC CONCEPT LIFE GUARD - THAILAND 2006, Pag. 22: ARCHIMIO LA VENTA - PH G. BAUINO - NAJCA CASES - MEXICO 2006, Pag. 24: LA LOIRE A COUTURE COURANT - S. CORDEAU - 2007, Pag. 29: PH ROBERT OPACHI - Pag. 29: CERRO TORRE - PH M. CHEMELLO - PATA GONIA 2011.



MADE IN ITALY



From the European Leader in Technical Cases Manufacturing

www.explorercases.com





BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Number (NSN) available on demand.





OUR SUPERIOR FEATURES

- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations

More information on www.explorercases.com



		1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	190	125	85	20	65		
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16		
External dim.	mm	216	180	102				
	in	8 1/2	7 1/16	4				
Weight empty		kg 0,70		lbs 1.54				
Weight w/foam		kg 0,80		lbs 1.76				
Volume		lt 2,0		gal 0.52				
Buoyancy		kg/max 1,4		lbs/max 3.08				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Optional shoulder strap available



Art. SHOULDERKIT.U




		1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	190	125	135	20	115		
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2		
External dim.	mm	216	180	152				
	in	8 1/2	7 1/16	6				
Weight empty		kg 0,85		lbs 1.87				
Weight w/foam		kg 0,92		lbs 2.02				
Volume		lt 3,2		gal 0.79				
Buoyancy		kg/max 2,4		lbs/max 5.29				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Optional shoulder strap available




		2209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	220	160	95	20	75		
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16		
External dim.	mm	246	215	112				
	in	9 11/16	8 7/16	4 7/16				
Weight empty		kg 0,88		lbs 1.94				
Weight w/foam		kg 0,99		lbs 2.18				
Volume		lt 3,3		gal 0.79				
Buoyancy		kg/max 2,3		lbs/max 5.07				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Optional shoulder strap available



Art. SHOULDERKIT.U

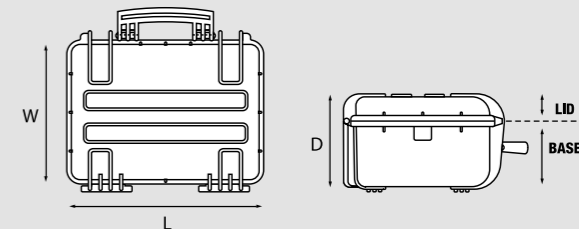



100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION



		2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	276	200	120	35	85		
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8		
External dim.	mm	305	270	144				
	in	12	10 5/8	5 11/16				
Weight empty		kg 1,62		lbs 3.57				
Weight w/foam		kg 1,83		lbs 4.03				
Volume		lt 6,6		gal 1.58				
Buoyancy		kg/max 4,2		lbs/max 9.25				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Lid can be set to slide-off (see pg. 28 for details)



Counterbalance supports (2712 and 2717 mod.)



		2214		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	220	160	145	20	125		
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16		
External dim.	mm	246	215	162				
	in	9 11/16	8 7/16	6 3/8				
Weight empty		kg 1,16		lbs 2.56				
Weight w/foam		kg 1,29		lbs 2.84				
Volume		lt 5,1		gal 1.32				
Buoyancy		kg/max 3,9		lbs/max 8.59				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Optional shoulder strap available




Art. SHOULDERKIT.U



		2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	276	200	170	35	135		
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16		
External dim.	mm	305	270	194				
	in	12	10 5/8	7 5/8				
Weight empty		kg 1,93		lbs 4.25				
Weight w/foam		kg 2,12		lbs 4.67				
Volume		lt 9,3		gal 2.37				
Buoyancy		kg/max 6,7		lbs/max 14.77				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions		B	O	G	BE	OE	GE	
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Lid can be set to slide-off (see pg. 28 for details)

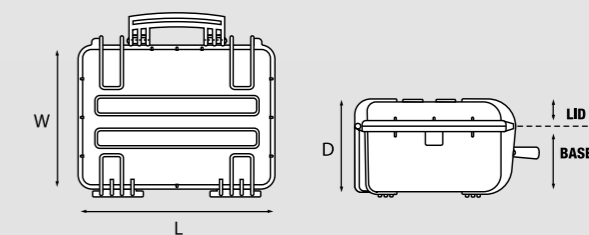



3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty	kg 2,29		lbs 5.04			
Weight w/foam	kg 2,51		lbs 5.53			
Volume	lt 13,1		gal 3.43			
Buoyancy	kg/max 7,0		lbs/max 15.43			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)



NEW



3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		
Weight empty	kg 2,92		lbs 6.43			
Weight w/foam	kg 3,30		lbs 7.27			
Volume	lt 19,6		gal 5.17			
Buoyancy	kg/max 10,6		lbs/max 23.36			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	BE				
	black w/foam	black empty				

- Lid can be set to slide-off (see pg. 28 for details)


Counterbalance supports (3317 e 3317W mod.)



3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	45	135
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty	kg 3,14		lbs 6.92			
Weight w/foam	kg 3,58		lbs 7.89			
Volume	lt 18,4		gal 4.75			
Buoyancy	kg/max 12,4		lbs/max 27.33			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle

Counterbalance supports (3818 mod.)

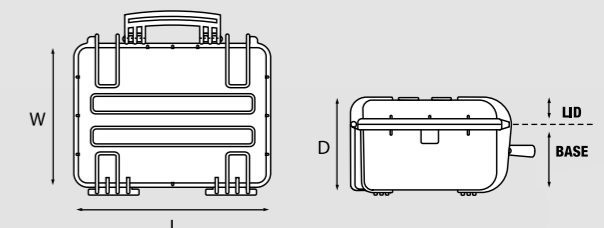



100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION

OUR FULL WARRANTY



"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments. That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside. After all, it is not by coincidence that all of our unbreakable cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on www.explorercases.com



4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty		kg 3,40		lbs 7.49		
Weight w/foam		kg 3,90		lbs 8.59		
Volume		lt 19,2		gal 5.01		
Buoyancy		kg/max 10,7		lbs/max 23.58		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty
	BC	GC				
	black w/pc bag	mil. green w/pc bag				

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		
Weight empty		kg 4,00		lbs 8.81		
Weight w/foam		kg 4,70		lbs 10.36		
Volume		lt 29,2		gal 7.66		
Buoyancy		kg/max 19,7		lbs/max 43.43		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty


- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



Counterbalance supports

4412.B C and **4412.G C** models include:

- computer bag with shoulder strap (mod. BAG-PC44)
- organized lid panel (mod. PANEXPL44)
- shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)

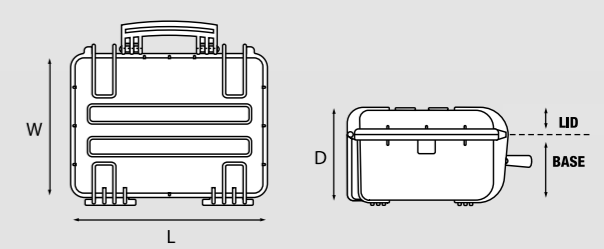

* Explorer Cases responsibility is limited to the case and not its content. Please contact us for more details on our warranty.



4820		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	205	50	155
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8
External dim.	mm	520	435	230		
	in	20 1/2	17 1/8	9 1/16		
Weight empty	kg 4,64		lbs 10.22			
Weight w/foam	kg 5,40		lbs 11.90			
Volume	lt 35,5		gal 9.24			
Buoyancy	kg/max 24,7		lbs/max 54.45			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle

Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case. (Art. BAG-PC48)



5117		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	173	50	123
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16
External dim.	mm	546	347	197		
	in	21 1/2	13 11/16	7 3/4		
Weight empty	kg 3,80		lbs 8.37			
Weight w/foam	kg 4,50		lbs 9.92			
Volume	lt 24,7		gal 6.34			
Buoyancy	kg/max 15,8		lbs/max 34.83			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



Art. SHOULDERKIT.U

100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION



5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty	kg 6,00		lbs 13.22			
Weight w/foam	kg 7,00		lbs 15.43			
Volume	lt 31,0		gal 8.18			
Buoyancy	kg/max 21,5		lbs/max 47.39			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty



- Lid can be set to slide-off (see pg. 28 for details)
- Soft grip rubber handle



Easy to open release telescopic handle



Wheels with bearings





**100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**



5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty	kg 9,17		lbs 20.21			
Weight w/foam	kg 10,40		lbs 22.92			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle

Telescopic handle with quick and safe lock/unlock system



Self-oiling free running wheels




5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty	kg 7,16		lbs 15.78			
Weight w/foam	kg 8,39		lbs 18.49			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Soft grip rubber handle



5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty	kg 10,54		lbs 23.23			
Weight w/foam	kg 12,65		lbs 27.88			
Volume	lt 84,2		gal 22.19			
Buoyancy	kg/max 62,0		lbs/max 136.68			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle

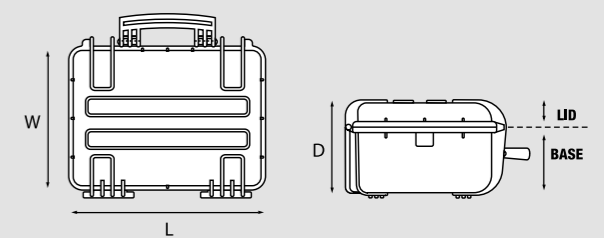



CERTIFICATIONS

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) available on demand

Certificates available for download on www.explorercases.com



		7630		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	765	485	305	60	245		
	in	30 1/8	19 1/8	12	2 3/8	9 5/8		
External dim.	mm	860	560	355				
	in	33 7/8	22 1/16	14				
Weight empty	kg	13,56		lbs	29.89			
Weight w/foam	kg	16,39		lbs	36.13			
Volume	lit	113,1		gal	29.85			
Buoyancy	kg/max	81,8		lbs/max	180.33			
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	B	O	G	BE	OE	GE		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Side handles
- Large front handle
- Wheels and retractable handle



Two man lift side handles



Self-oiling free running wheels



Back Retractable handle



Front



		7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	765	485	415	60	355		
	in	30 1/8	19 1/8	16 5/16	2 3/8	14		
External dim.	mm	860	560	460				
	in	33 7/8	22 1/16	18 1/8				
Weight empty	kg	15,02		lbs	33.11			
Weight w/foam	kg	18,87		lbs	41.60			
Volume	lit	153,9		gal	40.41			
Buoyancy	kg/max	118,5		lbs/max	261.24			
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F							
Versions	B	O	G	BE	OE	GE		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Side handles
- Wheels and retractable handle



Two man lift side handles




Self-oiling free running wheels



Back Retractable handle



Front





100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION

THE RANGE




The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam converters and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement. In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



9413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty		kg 6,70		lbs 14.77		
Weight w/foam		kg 7,70		lbs 16.97		
Volume		lt 45,3		gal 11.96		
Buoyancy		kg/max 27,9		lbs/max 61.50		
Temp. rating		YC min -33 max +90		YF min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty


- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available



Digital locks on demand (case code + DL)



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.135



Digital locks on demand (case code + DL)



Two man lift side handles





Wheels with bearings



Art. SHOULDERKIT.135

11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		
Weight empty		kg 7,80		lbs 17.19		
Weight w/foam		kg 8,80		lbs 19.40		
Volume		lt 53,7		gal 14.18		
Buoyancy		kg/max 33,3		lbs/max 73.41		
Temp. rating		YC min -33 max +90		YF min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available





13513		L	W	D	LID	BASE
		LENGTH	WIDTH	DEPTH		
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1410	415	159		
	in	55 1/2	16 5/16	6 1/4		
Weight empty	kg 8,70		lbs 19.18			
Weight w/foam	kg 9,95		lbs 21.93			
Volume	lt 63,7		gal 16.82			
Buoyancy	kg/max 39,5		lbs/max 87.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available



Digital locks on demand (case code + DL)




Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.135

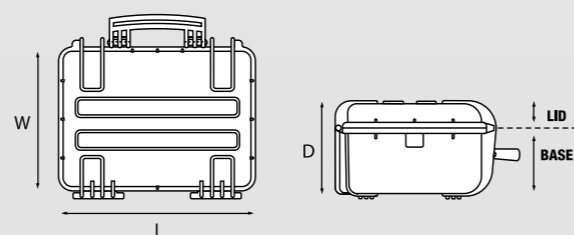

13527		L	W	D	LID	BASE
		LENGTH	WIDTH	DEPTH		
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty	kg 11,70		lbs 25.79			
Weight w/foam	kg 14,90		lbs 32.84			
Volume	lt 128,5		gal 33.94			
Buoyancy	kg/max 97,5		lbs/max 214.95			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels



Digital locks on demand (case code + DL)



Two man lift side handles



6 wheels with bearings



**100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION**




MULTI-WEAPONS CONFIGURATIONS

Models: **10840.B D1 - 10840.G D1 - 10840.B D2 - 10840.G D2**

All cases mentioned above are set with internal pre-shaped foam bedding and metal lock bars for the 6+6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models. (All mentioned trademarks and brands are the property of their respective owners).

OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE



Digital locks on demand (case code + DL)

It has a color-change **replaceable** card which turns from blue to lavender to pink as the humidity increases. (Art. ASP.0010)





HUMIDITY INDICATOR
(10840.B D1 and 10840.G D1 mod.)



4 self-oiling free running wheels

- Detachable lid for easier access
- Four self-oiling free running heavy duty wheels
- Folding side handles on both shells
- Two man lift large folding side handles



10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80		lbs 43.65		
Weight w/foam	kg	26,30		lbs 57.32		
Weight w/multi weapons foam	kg	25,00		lbs 55.11		
Volume	lit	260		gal 68.68		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	G	BE	GE	BD1	GD1
	black w/foam	mil. green w/foam	black empty	mil. green empty	black w/mult. weapons foam	green w/mult. weapons foam
	BD2	GD2				
	black with multi weapons foam	mil. green w/multi weapons foam				



Metal bracket (Art. EX.METALPLATE 2 pcs) to secure the whole case or the single shell to the wall in order to create a permanent or mobile armoury. Can also be used in special vehicles configurations or deployed in the field. The case (or both open shells separately) is hanged to the metal bracket by mean of its upper external handle, therefore easy to be applied and removed. The metal bracket has been studied to be fixed with a padlock to the case handle to avoid accidental releases or thefts (padlock not included).



Art. PANDIV.10840 Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware



PADDED GUN BAGS

Heavy duty padded gunbags designed in different sizes to suit most different models of rifles and accessories, to be securely protected and transported. Complete with shoulder straps.



NEW

HEAVY DUTY PADDED SYNTHETIC FABRIC

DURABLE ZIPPERS WITH NYLON PULLS

NEOPRENE HOOK & LOOP SIDE FLAPS

ADJUSTABLE INTERIOR STRAPS TO SECURE RIFLE POSITION



Exterior padded zipped pouches for accessories




GUNBAG 94
Ext. Dim. 940x300x70 mm. - Fits mod. 9413



GUNBAG 114
Ext. Dim. 1100x300x70 mm. - Fits mod. 11413



GUNBAG 135
Ext. Dim. 1300x300x70 mm.
Fits mod. 13513 and mod. 13527 (2 pcs.)

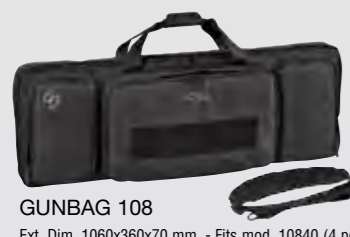

GUNBAG 108
Ext. Dim. 1060x360x70 mm. - Fits mod. 10840 (4 pcs.)



Art. BACKPACK KIT
All gunbags are fittable with optional strap for backpack use.



ACCESSORIES FOR CUSTOM SOLUTIONS

offshore industry - military & police - law enforcement & safety - outdoor - subsea nautical & marine - fire & rescue - emergency - medical - photographic - broadcasting manufacturing industry and many others.



Art. KIT SUPP.PLAST. includes 6 pcs.



Art. KIT SUPP.EXPL. includes 6 pcs.



Art. KIT.EXPL.PLUGS includes 6 pcs.

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY (KIT SUPP.PLAST. - KIT SUPP.EXPL.) FURTHERMORE, WHENEVER THE SLOTS ARE NOT GOING TO BE USED FOR IN-BUILT APPLICATIONS, THOSE CAN BE CLOSED BY BLIND INSERTS (KIT.EXPL.PLUGS) THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES. EQUIPPED WITH AN ADDITIONAL GASKET (WHICH WILL BE SQUEEZED IN BETWEEN THE PANEL AND THE FRAME) THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA

NEW



TSA APPROVED COMBINATION PADLOCK
(Art. EXPL.TSA.DIGILOCK)



PATENTED COMBINATION PADLOCK
(Art. EXPL.COMBILOCK)



PATENTED HEAVY DUTY BRASS PADLOCK
(Art. EXPL.PADLOCK)

THE NEW TSA APPROVED PADLOCKS ALLOW TSA AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK. TSA AGENTS ARE TRAINED TO RECOGNIZE THE TRAVEL SENTRY CERTIFIED LOGO AND SHOULD NOT BREAK THE CASE LOCK.



THE PATENTED PADLOCKS ARE DESIGNED TO FIT SNUG TO THE EXPLORER CASE MOULD SO AS NOT TO SWING OUT



MULTI-FUNCTION PADDED BAGS and ORGANIZED POUCHES

A complete set of removable padded bags with handles, internal adjustable dividers and lid panels with pouches available on demand in most of the models. They protect and transport any kind of sensitive equipment and thanks to their modularity, they can be easily combined.



BAG-R
Ext. Dim. (AxBxC) 270x195x80 mm.



BAG-S
Ext. Dim. (AxBxC) 270x195x130 mm.



BAG-T
Ext. Dim. (AxBxC) 325x230x95 mm.



BAG-E
Ext. Dim. (AxBxC) 375x265x140 mm.



BAG-PC44
Ext. Dim. (AxBxC) 450x345x55 mm.



BAG-A
Ext. Dim. (AxBxC) 450x350x125 mm.



BAG-F
Ext. Dim. (AxBxC) 475x365x160 mm.



BAG-PC48
Ext. Dim. (AxBxC) 475x365x170 mm.



BAG-B
Ext. Dim. (AxBxC) 530x285x135 mm.



BAG-G
Ext. Dim. (AxBxC) 435x285x165 mm.



DIV-H
Ext. Dim. (AxBxC) 435x285x270 mm.



DIV-I
Ext. Dim. (AxBxC) 435x285x110 mm.



BAG-L
Ext. Dim. (AxBxC) 380x240x240 mm.



BAG-M
Ext. Dim. (AxBxC) 755x240x245 mm.



DIV-N
Ext. Dim. (AxBxC) 485x382x240 mm.



BAG-O
Ext. Dim. (AxBxC) 382x242x355 mm.



BAG-P
Ext. Dim. (AxBxC) 755x240x350 mm.



DIV-Q
Ext. Dim. (AxBxC) 485x382x350 mm.



PANEXPL27
Dim. 255x180 mm.



PANEXPL33
Dim. 310x215 mm.



PANEXPL38
Dim. 375x225 mm.



PANEXPL44
Dim. 425x305 mm.



PANEXPL48
Dim. 475x325 mm.



PANEXPL51
Dim. 500x230 mm.




PANEXPL58
Dim. 575x395 mm.



PANEXPL76
Dim. 755x440 mm.

CASE	PANELS	BAGS AND DIVIDERS			
2712	PANEXPL27	R			
2717	PANEXPL27	S			
3317	PANEXPL33	T			
3818	PANEXPL38	E			
4412	PANEXPL44	PC44			
4419	PANEXPL44	A			
4820	PANEXPL48	F	PC48		
5117	PANEXPL51	B			
5122	PANEXPL51	B			
5822	PANEXPL58	G	G		
5823	PANEXPL58	G	G		
5833	PANEXPL58	G G I I	H H	G H I	
7630	PANEXPL76	L L L L	M M	N N	L L L N
7641	PANEXPL76	O O O O	P P	Q Q	O O O Q





MAIN FEATURES



POSITIVE STACKING LOCATION



JAM FREE LATCHES WITH EASY-OPENING MECHANISM (from model 3818 on)

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS


SEALING O-RING

EXCLUSIVE PP BASED INJECTION MOLDED BODY GRANTS SUPERIOR RESISTANCE

CORROSION PROOF METAL HINGES WITH LID STAY FEATURE

ALL CASES ARE PROVIDED WITH INTERNAL SLOTS FOR OPTIONAL PANEL MOUNTING BRACKETS OR PANEL MOUNTING RINGS

BY RELEASING THE SCREW LID BECOMES SET TO SLIDE OFF WHEN OPENED AT 70° (available on 2712, 2717, 3317, 4412, 4419, 5117, 5122 models)



THICKER STRUCTURAL FOAM POLYPROPYLENE WALLS GUARANTEE SUPERIOR PERFORMANCE IN EXTREME ENVIRONMENTS

REINFORCED CORNERS

PVC WATERPROOF I.D. REMOVABLE LABEL (Art. LABELCOVER + item nr.)

LOAD TESTED HANDLES REINFORCED WITH CORROSION PROOF STEEL PINS

STANDARD MODELS AVAILABLE EMPTY OR WITH LAYERS OF PRECUBED FOAM IN THE BOTTOM AND CONVOLUTED FOAM IN THE LID. CUSTOM FOAMS AVAILABLE ON DEMAND



LAYERS OF PRECUBED FOAM FOR THE BOTTOM AND THE LID (Art. FOAM. + item nr.)

CONVOLUTED FOAM ONLY FOR THE LID - includes 2 pcs. (Art. LIDFOAM. + item nr.)

MANUAL PRESSURE RELEASE VALVE. THE INTERNAL STOP RING PREVENTS VALVE FROM BEING COMPLETELY EXTRACTED (Art. PURGEVALVE.B)






MUB78		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty	kg 6,30		lbs 13.88			
Volume	lt 89		gal 23.51			
Buoyancy	kg/max 80,5		lbs/max 177.47			
Certifications	STANAG 4280 (ed. 2) - DEF STAN 81-41 Part 3 - Issue 4					
Versions	MUB78					
	black empty					

- Moulded High Impact Polypropylene
- Moulded integral lifting points on both ends
- Full length steel hinge pin to lid
- Positive grab over latching catches
- Trolley case integral wheels and hinge out pull handle
- Use in high/low temp environments
- Slide out clear ID Nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points
- Lightweight

Art. KIT TRAY MUB - Optional - Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elasticated bands for the tray also available (Art. KIT03).

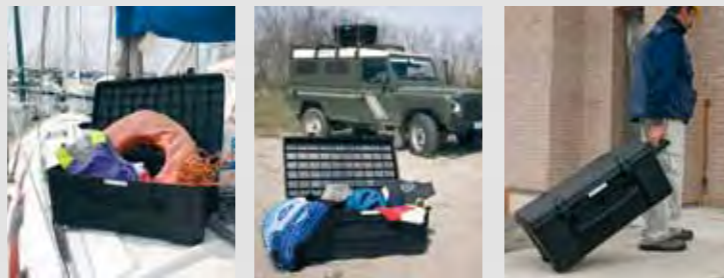

OEM SOLUTIONS

Explorer Cases are a genuine Made in Italy product of GT Line, european leading company in the manufacturing of technical cases for industrial and commercial applications. Our flexible manufacturing process allows us to easily and efficiently make your OEM case in any special colour and to personalize and develop specific interiors to meet your requirements.




GUNCASE		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	420	925	120	60	60
	in	16 9/16	36 7/16	4 3/4	2 3/8	2 3/8
External dim.	mm	475	1078	157		
	in	18 11/16	42 7/16	6 3/16		
Weight empty	kg 7,1		lbs 15.65			
Weight w/foam	kg 8,1		lbs 17.85			
Volume	lt 46,6		gal 12.31			
Versions	GUNCASE.B	GUNCASE.BE				
	black with convoluted foam	black empty				

- Four easy action quick release "up&over" catches
- Two combination locks
- Manual pressure release valve



OUR AIM IS ALWAYS TO GRANT MAXIMUM PROTECTION TO THE CONTENT, OPTIMIZING INNER SPACES AND NEVER IGNORING HANDINESS. CUSTOMIZED INTERNAL CUTTING FOAMS ALLOW A WIDE RANGE OF FLEXIBLE SOLUTIONS IN ORDER TO FULFILL ANY KIND OF NEEDS.

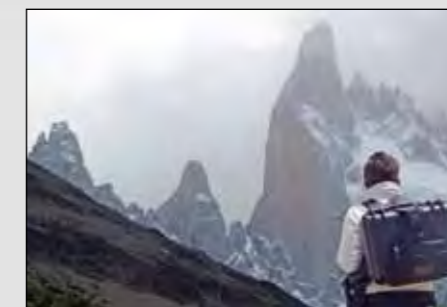

HANDY BACKPACK CARRYING SYSTEM MADE FROM ROBUST TEAR-RESISTANT FABRIC AND DESIGNED WITH COMFORTABLE PADDED SHOULDER STRAPS THAT LEAVE YOUR HANDS FREE. AVAILABLE IN TWO ADJUSTABLE SIZES THAT FIT FROM 3317 TO 4820 MODELS. (Art. BACKPACK M - BACKPACK L)