


BITMAC- BASEWORK SPECIFICATION FOR ARTIFICIAL GRASS (with Shockpad)

BITMAC - BASEWORK SPECIFICATION With Rubber shockpad & Artificial Grass

1. Excavate to a depth of 200mm,
2. Lay treated timber edges to perimeter, allowing artificial grass to be fixed down the outside vertical face of timber edges, to prevent exposed edges of grass.
3. Lay and compact 110mm of MOT Type 1 stone (could be substituted for free draining stone)
4. Lay & screed off 50mm of open textured porous bitmac base macadam, level tolerance of + or - 3mm under a 3m straight edge
5. Note: Paving flag will need to be installed after the [artificial grass](#) surface.

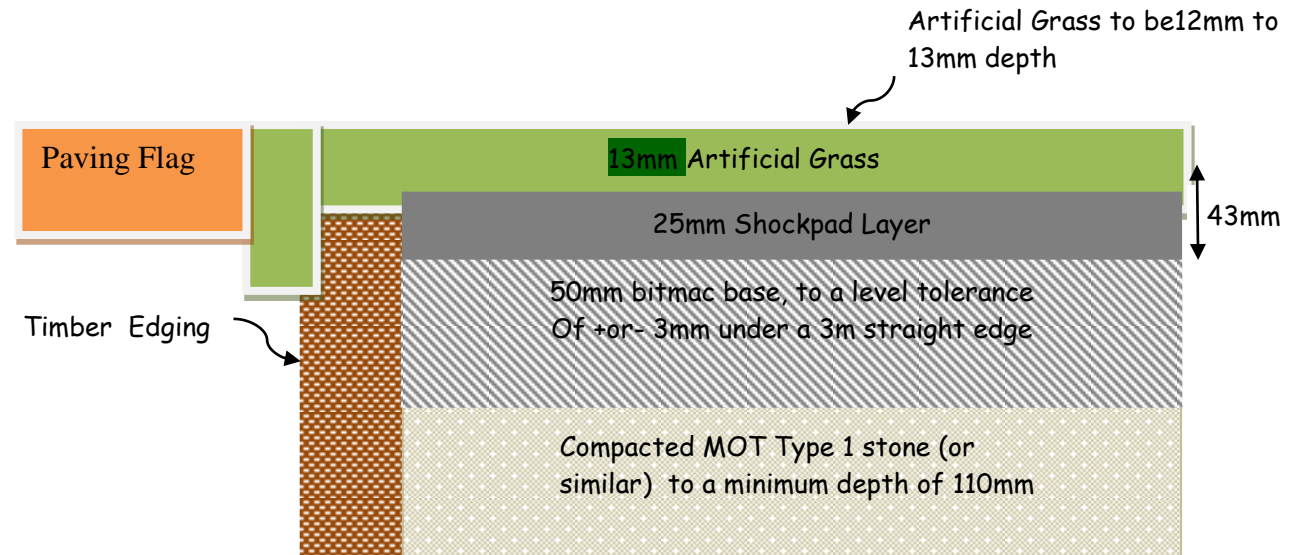

Base construction is a vital part of [safety surfacing](#) installation. The below notes are produced for guidance only and may require variation due to specific site conditions.

The above specification is an industry standard. Our recommendation would always be that the surface be laid on a porous solid surface. i.e. Concrete or Bitmac with PCC edges where budgets allow.

Wet-pour is a porous system and drainage provisions should also be allowed for at sub base level.

Water House, 35 Water Lane, Wilmslow, Cheshire, SK9 5AR

Tel: 01625 445 760 Fax: 01625 525 619

info@softsurfaces.co.uk

www.softsurfaces.co.uk