



## Typical Drainage Layout for Synthetic Sports Pitch


Sports drainage is a vital element of any successful sport pitch construction and will vary depending on specific site conditions. There are therefore a variety of specifications which can be used.

Most common is the use of a 160mm perimeter drain with 80mm lateral drains connecting into it, normally at either 5 meter or 10 meter centres.

The position of rodding points should be considered, to allow for future maintenance.

The outfall can then be connected into an existing main drain (preferential) or soak away.

## DRAINAGE SPECIFICATION - SPORTS PITCH

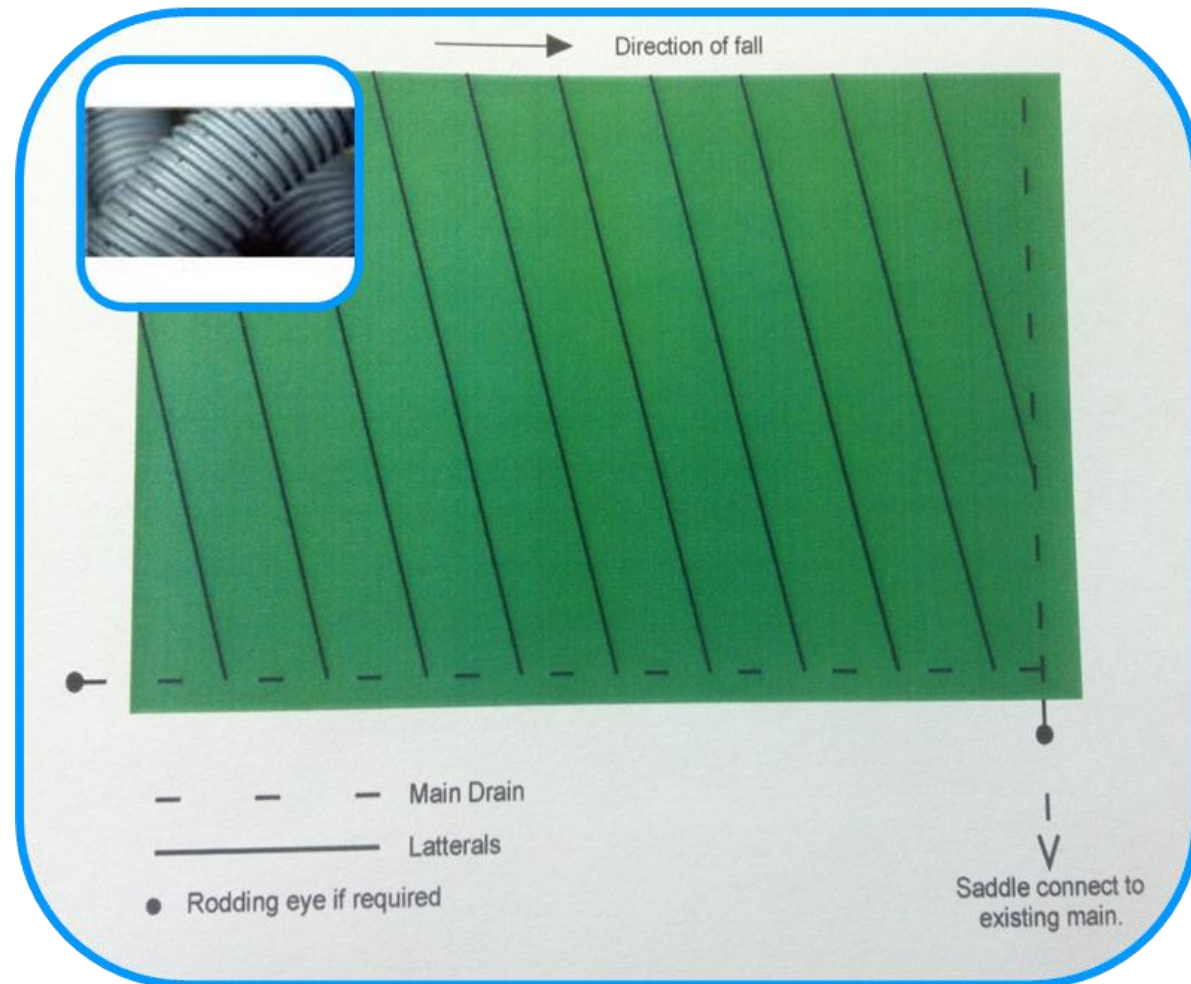

Water House, 35 Water Lane, Wilmslow, Cheshire, SK9 5AR

Tel: 01625 445 760 Fax: 01625 525 619

[sports@softsurfaces.co.uk](mailto:sports@softsurfaces.co.uk)

[www.sportsandsafetysurfaces.co.uk](http://www.sportsandsafetysurfaces.co.uk)