

6820


Max. 25 VA

AC/AC POWER SUPPLIES

- Faste utgangsspenninger
- Termosikring i transformator
- Nettledning
- Sekundærledning eller snappkontakt
- Kan leveres med festebrakett
- Fixed output voltages
- Thermal fuse in transformer
- Mains cord
- Cord or snap terminals
- Mounting bracket available



Tekniske data	Technical specifications	
Inngangsspenning:	Input voltage:	230 VAC +6/-10%, 50/60Hz
Utgangsspenning:	Output voltage:	3-42 VAC
Maks. utgangseffekt:	Max. output power:	25 VA
Temperaturområde:	Temperature range:	-20°C - +30°C
Isolasjonsklasse:	Insulation class:	II
Isolasjonsspenning:	Insulation voltage:	3000 VAC
Elektrisk sikkerhetsstandard:	Electrical safety standard:	EN 60950
EMC standarder	EMC standards	
• Emisjon:	• Emission:	EN 50081-1
• Immunitet:	• Immunity:	EN 50082-1
Mål (LxBxH):	Dimensions (LxWxH):	98 x 87 x 55 mm
Vekt:	Weight:	920 g

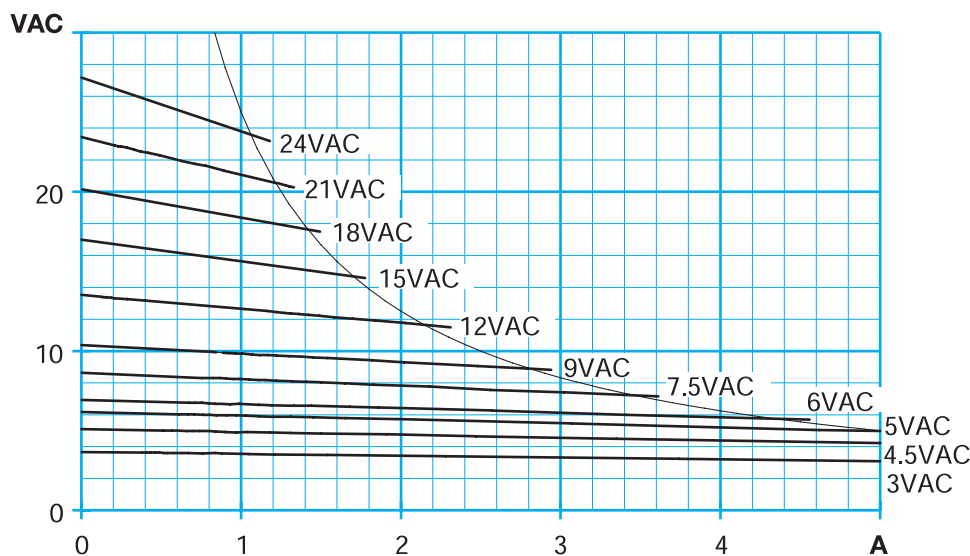

Spenningsversjon (VAC) Voltage version (VAC)	Maks. last (A) Max. load (A)
3	5,0
4,5	5,0
5	5,0
6	4,1
7,5	3,3
9	2,7
12	2,0
15	1,6
18	1,4
21	1,2
24	1,0
42 *	0,6

* Ikke i diagram
* Not in diagram

42 V versjon:	Tomgang : 46V 0,6A : 41,5V
42 V version:	No load : 46V 0,6A : 41,5V

www.mascot.no
sales@mascot.no
Phone:
Fax:

Main Office
PO Box 177
N-1601 FREDRIKSTAD
Norway
+47 69 36 43 00
+47 69 32 94 33

Mascot UK
PO Box 1560, Andover
SP11 8OZ HAMPSHIRE
UK
+44 (0)1264 357177
+44 (0)1264 364055

Mascot Deutschland
Mooshaldenweg 5
D-88069 TETTANG
Germany
+49 7542 953540
+49 7542 953560

Mascot France
23 Clos du Perthuis
F-14200 HEROUVILLE ST. CLAIR
FRANCE
+33 (0)2 31 06 04 40
+33 (0)2 31 06 04 50

Mascot Benelux
Wilderstraat 52
B-9400 APPELTERRE
Belgium
+32 (0)54 300 442
+32 (0)54 300 443