

8930


Max. 31 VA

AC/AC POWER SUPPLIES

- Faste utgangsspenninger
- Termosikring i transformator
- Nettledning
- Sekundærledning eller snappkontakt
- Kan leveres med festebrakett
- Fixed output voltages
- Thermal fuse in transformer
- Mains cord
- Cord or snap terminals
- Mounting bracket available



<u>Tekniske data</u>	<u>Technical specifications</u>	
Inngangsspenning:	<i>Input voltage:</i>	230 VAC +6/-10%, 50/60Hz
Utgangsspenning:	<i>Output voltage:</i>	6-42 VAC
Maks. utgangseffekt:	<i>Max. output power:</i>	31 VA
Temperaturområde:	<i>Temperature range:</i>	-20°C - +30°C
Isolasjonsklasse:	<i>Insulation class:</i>	II
Isolasjonsspenning:	<i>Insulation voltage:</i>	3750 VAC
Elektrisk sikkerhetsstandard:	<i>Electrical safety standard:</i>	EN 60742, EN 60950
EMC standarder	<i>EMC standards</i>	
• Emisjon:	• <i>Emission:</i>	EN 50081-1
• Immunitet:	• <i>Immunity:</i>	EN 50082-1
Mål (LxBxH):	<i>Dimensions (LxWxH):</i>	98 x 87 x 55 mm
Vekt:	<i>Weight:</i>	950 g

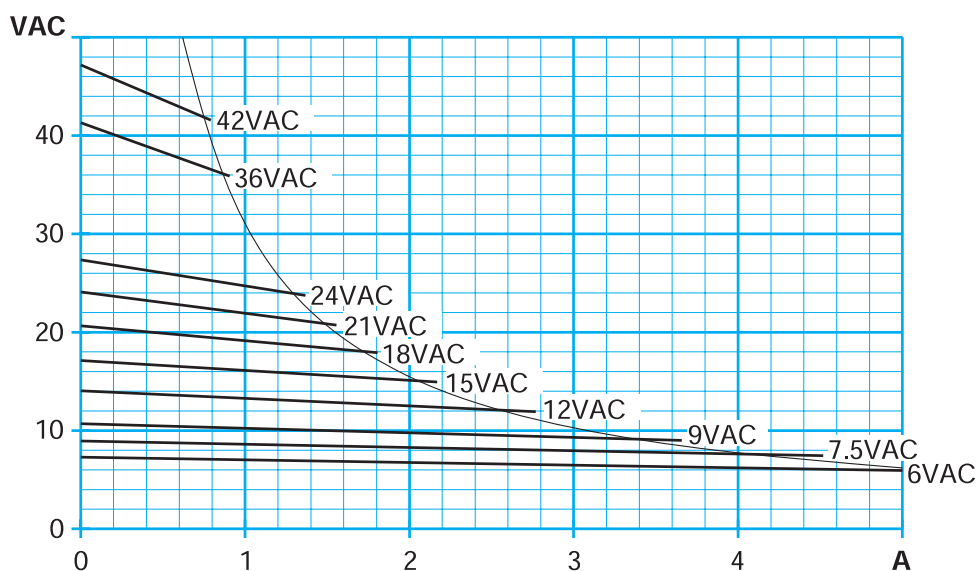

Spenningsversjon (VAC) Voltage version (VAC)	Maks. last (A) Max. load (A)
6	5,0
7,5	4,1
9	3,4
12	2,5
15	2,0
18	1,7
21	1,4
24	1,2
36	0,86
42	0,73