


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikeretter og kondensator
- Utskiftbare plugger




**Technical specifications**

Input voltage:  
Output voltage:  
Max. output power:  
Insulation class:  
Electrical safety standard:  
EMC standards  
• Emission:  
• Immunity:  
Output terminals  
Cord with/without plug:  
Dimensions excl. plug (LxWxH):  
Weight:

**Tekniske data**

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz  
Utgangsspenning: 3-42 VDC  
Maks. utgangseffekt: 8 W  
Isolasjonsklasse: II  
Elektrisk sikkerhetsstandard: EN 60065, EN 60950  
EMC standarder  
• Emisjon: EN 61000-6-3  
• Immunitet: EN 61000-6-1  
Utgangsterminaler  
Sek. ledning med/uten plugg: Accessories /Tilbehør  
Mål uten plugg (LxBxH): 95 x 51 x 57 mm  
Vekt: 390 g

**VDC**

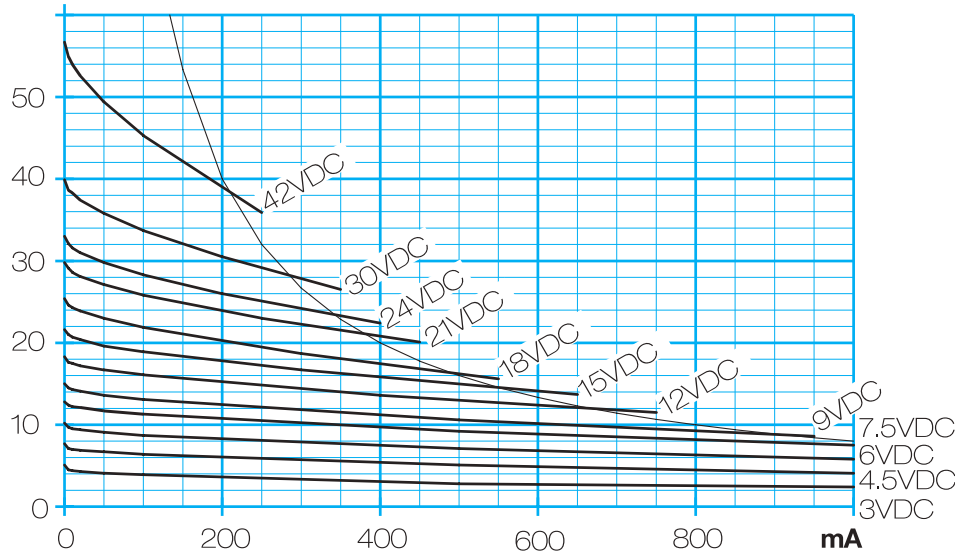

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	2,0
4,5	4,0
6	6,0
7,5	6,5
9	7,0
12	7,5
15	8,0
18	7,5
21	8,0
24	8,0
30	8,0
42	8,0