


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Approvals:
 - Complies w. medical std EN 60601 (on request)

- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikeretter og kondensator
- Utskiftbare plugger
- Godkjenninger:
 - Tilfredsst. medisinsk std EN 60601 (på forespørsel)




Technical specifications

Input voltage:
Output voltage:
Max. output power:
Insulation class:
Electrical safety standard:
EMC standards
• Emission:
• Immunity:
Output terminals
Cord with/without plug:
Dimensions excl. plug (LxWxH):
Weight:

Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz
Utgangsspenning: 3-28 VDC
Maks. utgangseffekt: 10 W
Isolasjonsklasse: II
Elektrisk sikkerhetsstandard: EN 60065, EN 60950
EMC standarder
• Emisjon: EN 61000-6-3
• Immunitet: EN 61000-6-1
Utgangsterminaler
Sek. ledning med/uten plugg: Accessories /Tilbehør
Mål uten plugg (LxBxH): 100 x 51 x 63 mm
Vekt: 450 g

VDC

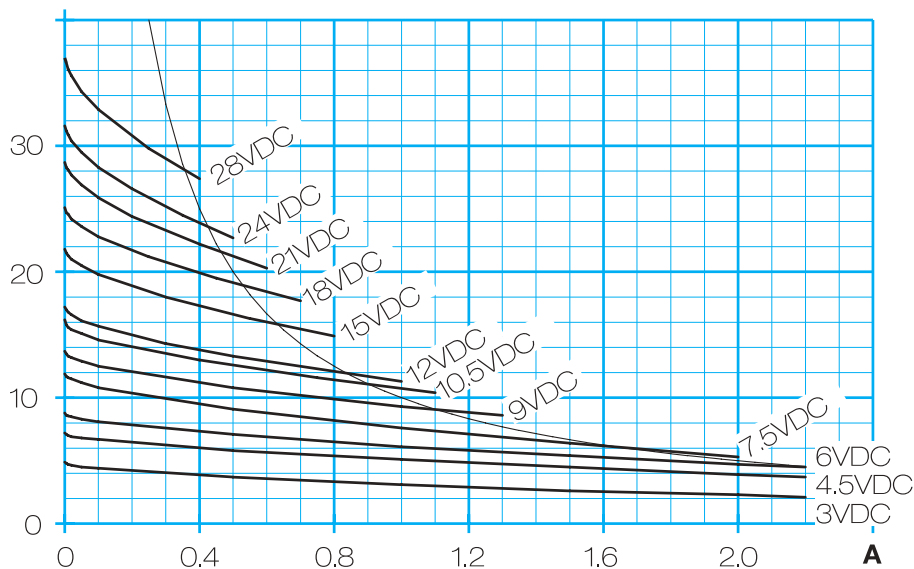

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	6,0
4,5	7,0
6	8,0
7,5	8,5
9	10,0
12	10,0
15	10,0
18	10,0
21	10,0
24	10,0
28	10,0