



**Gespasa**  
**TOT comercial, s.a.**  
 [ Fabricantes desde 1974 ]

Partida Horta d'Amunt s/n · Apdo. de Correos nº 149  
 E-25600 BALAGUER (Lleida)  
 E-mail: [gespasa@gespasa.es](mailto:gespasa@gespasa.es)  
<http://www.gespasa.es>

++34 (9)73 45 10 72  
 ++34 (9)73 44 50 00 · 44 84 00

## AG-500 (230VAC)

### Self-suction Explosionproof Pump



code 10030

**G2a**

50  
L/MIN

230  
VAC




AG-500



mm (approx.) 155 / 240  
 Kg (approx.) 11,4

#### Flow curves

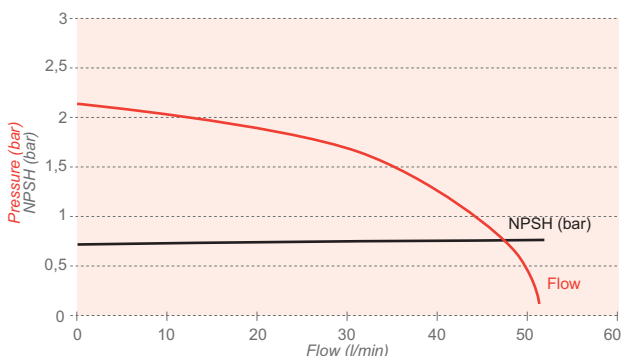

- This pump is suitable for petrol, kerosene, diesel and oil transfer. It must be connected to 230VAC supply system.
- This pump is suitable for using in agriculture, building, public works and industry.

#### TECHNICAL DATA

- Self-suction - self-priming, explosionproof, eccentric with self-adjusting blades
- With recirculation bypass system
- Suction: 5m
- Consumption: 1-2A
- R.P.M.: 2.850rpm
- Motor: 0,18kW 230VAC 50Hz single-phase EExd
- Operation temperature: 0°C - +50°C
- S2 30' operation
- IP-55 protection
- Certificate EExd IIB T4 ISSEP02 ATEX036
- With thermal protector
- Thread connection: F3/4" (BSP)
- ON/OFF switch
- Cataphoretic treatment

#### SAG-500 · PUMP WITH MECHANICAL LITRE METER




- Kit composed of pump with litre meter
- It can be assembled on a metal base

\*Hose and nozzle not included



mm (approx.) 335 / 335  
 Kg (approx.) 13

SAG-500 with metallic base nr. 3

Pump	Meter	Base	
 AG-500 230VAC	 MG-80V Mechanical Viton joints	 Metallic nr. 3	
•	•	•	31250
•	•	•	30650