



Gespasa
TOT comercial, s.a.
 [Fabricantes desde 1974]

Partida Horta d'Amunt s/n · Apdo. de Correos nº 149
 E-25600 BALAGUER (Lleida)
 E-mail: gespasa@gespasa.es
<http://www.gespasa.es>

++34 (9)73 45 10 72
 ++34 (9)73 44 50 00 · 44 84 00

AG-600 (12 or 24VDC)

Self-suction Explosionproof Pump
 of continuous current



AG-600 12VDC
 AG-600 24VDC

cód. 10060
 cód. 10150

G175

*50
 L/MIN


12
 VDC



AG-600

mm (approx.) 155 / 165
 Kg (approx.) 11,2

Flow curves

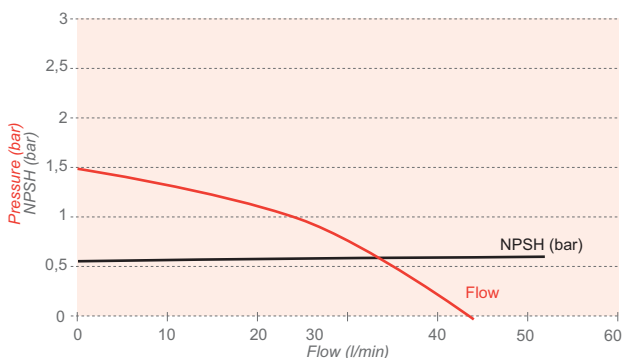

- It is equipped with a 352 micron filter on the suction to avoid that solid impurities gets in the pump inner.
- With 3m bipolar cable (clamps are not included)

TECHNICAL DATA

- Self-suction, self-priming, explosionproof, eccentric with self-adjusting blades
- With recirculation bypass system
- *Flow with free outlet: 50 l/min
- Suction: 2,7m
- Consumption: 25A
- R.P.M.: 3.000rpm
- Motor: 0,18kW 12 or 24VDC EExd
- Operation temperature: 0°C - +50°C
- Continuous duty
- IP-55 protection
- Certificate EExd IIB T4 ISSEP02 ATEX036
- With thermal protector
- Thread connection: F3/4" (BSP)
- ON/OFF switch
- Cataphoretic treatment

USE

- This pump is suitable for petrol, kerosene, diesel and oil transfer. It must be connected to 12 or 24VDC supply system.
- This pump is suitable for using in agriculture, building, public works, industry, golf course and aviation.

SAG-600 · PUMP WITH MECHANICAL LITRE METER

- Kit composed of pump with litre meter
- It can be assembled on a metal base




*Hose and nozzle not included



SAG-600

SAG-600 with metallic base nr. 3

mm (approx.) 335 / 335
 Kg (approx.) 13

Pump	Meter	Base
 AG-600	 MG-80V Mechanical Viton joints	 Metallic nr. 3
•	•	•
•	•	•

31860
 31870