



**SERIES**  
**CLASSIC**

ROTARY VANE COMPRESSORS FROM 1,5 A 55 kW

ERC  
ERCS  
ERA  
ERCSE

HTMO

# SERIES CLASSIC



## About Us

Ing. **Enea Mattei SpA** is an Italian company that has been producing air compressors since 1919. Over the years, the company has continually evolved and is today one of the world's foremost companies in the compressed air sector and the leader in the production of rotary vane compressors.

Behind the success of Mattei are the choices the company has made in terms of design, production and marketing, driven by the results of its continual and in-depth research and development programmes.

During these years of continual change, Mattei has been able to adapt to the requirements of the market and through the results of its research has created products that are always innovative and technologically advanced.



## Certified quality

Quality as an integral part of all company functions and constant improvement of all production processes so as to always guarantee the maximum level of reliability and satisfaction. This, in brief, is the value and the meaning of **Mattei's** operational philosophy. A way of approaching the market and customers that makes **Mattei** an absolute point of reference in the compressed air sector.

Since 1994, **Mattei** has been operating with a Quality System certified by the DNV Institute under UNI EN ISO 9001 regulations.



## Simply different The compressor that makes a difference

### MATTEI'S COMPRESSORS

Mattei's rotary vane air compressors are the result of continuous innovation and advanced design capabilities. The low rotational speed of the compressor unit found only in vane technology, the high volumetric efficiency and the complete absence of roller or thrust bearings, result in energy savings of **over 15%** compared to other rotary compressors.



### EFFICIENCY 1:1

All Mattei's compressors have a 1:1 ratio between the electric motor speed and that of the air end. This means greater energy efficiency and higher performances.

Compared to other technologies, rotary vane compressors guarantee a superior internal air seal, together with a consistent and long lasting performance.

### LOW OPERATING COSTS: LOW MAINTENANCE

Mattei's rotary vane compressors are designed to reach 100,000 hours life without the need to replace any blades or other metal parts.

The long operating life of a Mattei compressor is assured by high quality machining which is the essence of rotary vane air compressors.

### SAFETY / RELIABILITY

The integrated design, direct coupling, low rotational speed and the limited number of moving parts ensure Mattei's rotary vane air compressors remain safer, more durable and therefore more reliable over time.

### SIMPLICITY

Mattei's rotary vane air compressors are quiet and can be located almost anywhere. They are quickly installed and take up a limited amount of space.


Their accessible design makes maintenance operations simple and straightforward.

### QUALITY OF THE AIR

All Mattei's compressors are fitted with a generously sized filtering system, which guarantees quality compressed air suitable for any use. Mattei's very efficient, multi-stage oil separation system produces an exceptionally low lubricant carry-over.

OTHER COMPRESSORS  
MAINTENANCE

MATTEI'S COMPRESSORS  
MAINTENANCE

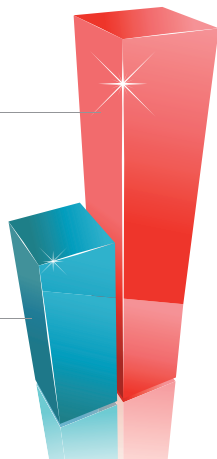

# SERIES CLASSIC

## Classic Series Rotary Vane Compressors

Mattei's Classic series compressors are complete and efficient machines that are ideal for any type of industrial application.

### DIRECT COUPLING

Mattei has always produced compressors in which the electric motor, which turns at a speed of only 1,500 rpm, is directly coupled to the compression unit by means of a flexible joint. This direct, in-line coupling results in considerable energy saving as there are no losses due to the presence of pulley wheels and drive belts.



### COMPRESSOR AND DRYER: ALL-IN-ONE

The ERCSE version includes the installation of a dryer, air cooled with environment-friendly gas. The combination of a Mattei's rotary vane air compressor, an integrated dryer and a tank is the ideal solution to have a complete system with very limited dimensions.



### AUTOMATIC FLOW RATE CONTROL

As well as the classic "ON/OFF OPERATION" mode, all of the models, are fitted with the special modulating proportional intake valve which allows air supply at a constant pressure and even offers the possibility of working without an air storage tank.

### DURABLE AND QUIET

The Classic compressors are robust, resistant to corrosion and are particularly compact and ideal for installation in small spaces. The vane technology ensures safe and quiet operation even without a noise reducing outer canopy.



## Operating principle

**Maximum efficiency of the air compression process, excellent reliability and low running costs; are just some of the key benefits that rotary vane technology can offer.**

The vane compressor is a volumetric rotary compressor that consists of a stator cylinder in which a rotor is mounted off-centre but parallel to its sides. The rotor has slots in which the vanes are free to slide: centrifugal force keeps them in contact with the sides of the stator during rotation.



The rotary vane compressor, thanks to its **simple construction**, offers remarkable advantages, first among them being **greater volume yield** because the vanes are in constant contact with the inner wall

of the stator and form a perfectly airtight seal with no leaks along the wall thanks to a continuous film of oil. In this type of compressor no axial

thrust is generated so the side surfaces of the rotor are not subject to wear and thus no rotating bearings

or thrust bearings are needed. The vanes, too, because of the special way they are made have practically **unlimited life**.

Behind the success of Mattei compressors there is thus **extreme reliability, long life, quiet operation and simplicity of maintenance**. Design is important too: compactness and clean lines, together with harmonious shapes, give Mattei compressors an image of robustness and ease of use.

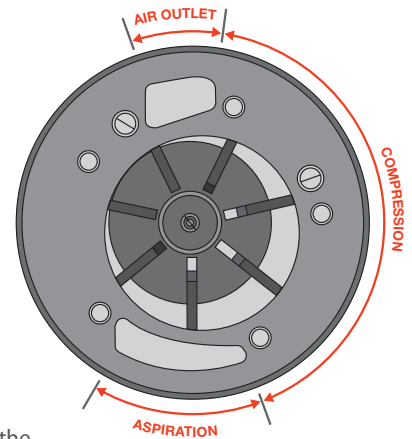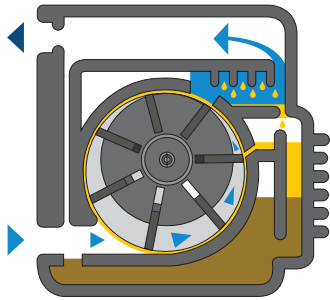

### A HIGH EFFICIENCY OIL SEPARATION

The separation of the lubrication oil from the compressed air takes place in multiple stages. A first separation occurs in the oil chamber as the air passes through a labyrinth path, then it continues at the separator inlet (before the filter) where the air flow slows down passing through a series of directional variations, and finally through the coalescing filter. Due to this superior separation system the oil carry over is extremely low, leading to improved separator life, greater protection for the application and reduced operating costs.

### SIMPLE MAINTENANCE AND ACCESSIBLE

The absence of the outer canopy considerably facilitates all maintenance and service operations. The compressor requires no special foundations and its base has suitable lifting points for ease of installation.



# SERIES CLASSIC



## Series 200 ERC/ERCS 1 > 3

Rated power:	1,5 to 3 kW
F.A.D.:	0,16 to 0,32 m <sup>3</sup> /min
Max. working pressure:	10 bar
Sound pressure level:	64-70 dB(A)
Hz:	50

Rated power:	1,5 to 2,2 kW
F.A.D.:	0,20 to 0,28 m <sup>3</sup> /min
Max. working pressure:	10 bar
Sound pressure level:	66 dB(A)
Hz:	60



## Series 200 ERA 1 > 3

Rated power:	1,5 to 3 kW
F.A.D.:	0,14 to 0,27 m <sup>3</sup> /min
Max. working pressure:	10 bar
Sound pressure level:	64-70 dB(A)
Hz:	50



## Series 500 ERC/ERCS 4 > 11

Rated power:	4 to 11 kW
F.A.D.:	0,49 to 1,97 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	71-75 dB(A)
Hz:	50

Rated power:	4 to 11 kW
F.A.D.:	0,43 to 2,11 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	73-77 dB(A)
Hz:	60





## Series 500

### ERCSE 4 > 11

Rated power:	4 to 11 kW
F.A.D.:	0,49 to 1,97 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	71-75 dB(A)
Hz:	50



## Series 1000

### ERC 15 > 22

Rated power:	15 to 22 kW
F.A.D.:	1,87 to 3,75 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	79 dB(A)
Hz:	50

Rated power:	15 to 22 kW
F.A.D.:	2,4 to 3,95 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	81 dB(A)
Hz:	60



## Series 2000

### ERC 30 > 55

Rated power:	30 to 55 kW
F.A.D.:	3,67 to 8,9 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	84 dB(A)
Hz:	50

Rated power:	30 to 45 kW
F.A.D.:	4,9 to 9,9 m <sup>3</sup> /min
Max. working pressure:	8/10/13 bar
Sound pressure level:	86 dB(A)
Hz:	60



# Classic CONTROLLERS

## MAESTRO<sup>XS</sup> to have everything under control

With a view to energy saving, the communication inside a compressor room plays a decisive role.

It is absolutely essential to manage, control and immediately intervene in the operation of the system in order to prevent waste and unnecessary energy consumption.

ERC 30-55 compressors are equipped with the exclusive state-of-the-art computerised controller, Maestro<sup>XS</sup>.



## Microprocessor control system

Maestro<sup>XS</sup> is able to adjust the compressor's operation to the specific requirements of the system it is connected to. It's equipped with programming levels and special control and analysis options regarding the compressor's status and any faults that have occurred. Even if the electrical supply fails Maestro<sup>XS</sup> is able to store the compressor settings and all its operating data.



## MAESTRO<sup>xs</sup>: Features and Functions



- Ergonomic control panel with quick access keys to main menus.
- Menus access keys, start, stop and reset led keys.
- Semi-graphic LCD display with illuminated text.
- 24 Vdc digital inputs.
- Digital dry contacts output up to 230 Vac and up to 24 Vdc.
- Interfaces:
  - RS485 for intercommunication with other MAESTRO devices.
  - RS485 (optional) to communicate with the supervising PC and network.
- Analogue data display (line pressure, chamber pressure, oil temperature, outgoing air temperature) and general data (alarms, operating messages, machine state, maximum and minimum pressure, last start and stop times).
- Hour counter to display the enabled, working and load times and maintenance notices.
- Events database to store alarms and blocks, with alarm intervention indication, alarm intervention time, machine state.
- Multi-language user interface.
- Weekly and hourly programmable start and stop times.
- Immediate reading of the compressor operating data on the display.
- Basic and advanced parameters programming for an optimal operation of the compressor.
- Storage of up to 20 malfunctioning events.
- Storage of the last 20 programme modifications.
- Control of the integrated dryer.
- Machine start and stop remote control.
- The feedback (as standard), through dry contacts, of the following machine states: enabled compressor, working compressor, loaded compressor, blocked compressor.



# Classic CONTROLLERS

## CONCERTO: Complete control and absolute flexibility



Numerous compressor stops and starts, energy wastage and wide variations in the compressor operation represent common problems in many compressed air systems.

Concerto is Mattei's state-of-the-art compressed air management system, designed to satisfy any requirement of a compressed air user, regardless of the type of compressor installed. By the use of customisable functions the device allows the simultaneous command and control of **up to 16 compressors**, limiting the idle running times and optimising the customer's choice. Concerto enables **energy savings of over 35%**.



### IMMEDIATE SAVING

Regardless of the compressors combination and model, Concerto always selects the most economical configuration, maximising the plant efficiency.

Concerto controller extends the life of your compressors, guaranteeing the smallest number of motor start ups, and eliminating idle running times almost completely.

### FUNCTIONALITIES

Concerto requires only a few configuration parameters, to allow the combination of differently performing compressors to synchronise their compressed air production with the consumption demand.

A clear display facilitates the system programming operations, making them easy and intuitive.

### CONTROL VIA PC

The main parameters, failure signals, maintenance intervals and energy consumptions can be directly displayed on a PC via a normal web server. This way the equipment can always be easily monitored and controlled in order to minimise unplanned events.

### GLOBAL MANAGEMENT

Dryers, filters and condensate treatment accessories can be directly connected to the system via digital inputs. In the same way analogue output sensors can be connected, in order to monitor the entire compressed air system.

Due to this Concerto provides an extremely wide range of information regarding the plant management, which is also viewable via web server.

Concerto also manages and controls variable speed compressors, fitted with an inverter, ensuring that they remain within their maximum efficiency range.

## MULTICOMP II

When a production process requires variable amounts of compressed air or it is necessary to avoid any machine downtime, a controller optimises the compressed air system management. Multicomp II is Mattei's superior controller, suitable for small and medium enterprises, and is able to manage **up to 6 compressors**. Multicomp II controls the line pressure variations and drives the operation cycle of each compressor independently, according to a programmable sequence.



### MANAGEMENT MODES

- *Sequence: the first compressor to start will be the first one to stop*
- *Cascade: the first compressor to start will be the last one to stop*
- *Hour equalisation: it balances the operation times for each compressor*
- *Flow: each compressor starts according to the actual compressed air requirement*




# SERIES CLASSIC

## Energy recovery from compressed air

In a lubricated and air-cooled compressor, about 80% of its absorbed power is wasted as heat in the oil. The heat absorbed by the oil during the air compression process is transferred to the air flow, that goes through the cooler and is dispersed to the atmosphere.

The mechanical energy used for compression is wasted as follows:

- about 80% for oil cooling;
- about 10-12% transferred to the compressed air as heat;
- about 2-3% in compressed air as energy;
- the rest due to heat radiation.



Mattei offers for its compressors a heat recovery system that allows water to be heated for industrial process or sanitary use.



The "Heat Recovery" kit is totally integrated into the oil cooling circuit, making the unit independent from the oil temperature control and protected from any possible malfunctions, such as water flow reduction and overheating.


## How much can you save by recovering heat?



The possibility to use the energy recovered as hot water during an entire year depends on the use you make of it.

Up to 80% of the recovered heat can be used in your industrial building to produce hot sanitary water or for space heating.

It is even possible to recover up to 100% of the thermal energy if there is an industrial process that requires heat.

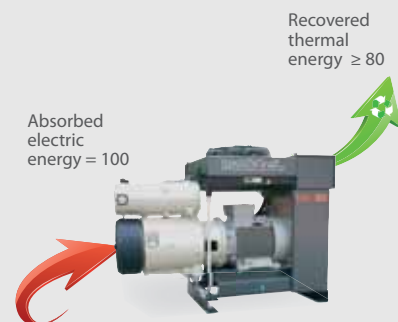

## Total quality management

### TOTAL QUALITY MANAGEMENT

Mattei considers quality as an essential value that represents the key factor to develop a positive relationship between the culture and performance of one's company. Innovative management software, developed solely for Mattei and technologically advanced manufacturing equipment, such as robotic machining centres and high precision machine tools, are at the heart of the advanced technical and quality levels of Mattei's products.

### 3D QUALITY CONTROL

The quality check of manufacturing tolerances occurs constantly via three dimensional measurement machines.

This ensures the compliance of our products with the highest quality standards.



### COMPREHENSIVE TESTS

Before leaving our factory any Mattei compressor has already undergone various extensive and in-depth testing procedures, during which it has been checked and tested in different operating conditions. All the electric, mechanical and performance information are recorded via a wireless data detection system.

### HIGH TECHNOLOGY MANUFACTURING MACHINERY

The manufacturing of compression units and blades is made through modern robotic machining centres. The parts assembly is carried out by specialised staff and in accordance with strictly controlled operating procedures, specified by Mattei's quality management.

## Always caring about our customers' requirements



### WORLDWIDE CONSULTANCY AND ASSISTANCE

Mattei operates worldwide with its sales and assistance network, providing a wide service range.

By purchasing a Mattei compressor you can rely on a qualified after-sales service, able to answer any request for assistance in very short time scales.



## Mattei original spare parts and lubricants

Mattei Original Spare Parts and Mattei Rotoroil lubricants are made to very high design standards and conform to precise technical specifications. Only Mattei original spare parts allow you to be sure of maintaining over time the same levels of performance, reliability and safety of your Mattei product.

- Mattei Original Spare Parts are indispensable for the efficiency of your compressed air equipment
- Parts are always available in stock
- Quality tested and conforming to manufacturer specifications
- Suitable for Mattei's recommended maintenance intervals



## MIEM: Mattei Intelligent Energy Management



The cost to produce a fixed quantity of compressed air greatly depends on the efficiency of the compression system.

To obtain potentially significant energy savings it is important to identify the minimum working pressure and demand profile required for a plant's compressed air supply.

The MIEM system allows Mattei to check the suitability of a currently installed compressed air plant and to verify any possible opportunities to improve its efficiency.

Thanks to specifically developed software, Mattei's technicians are able to evaluate the customer's current air consumption profile and to estimate the relative energy consumption. In addition the MIEM analysis allows Mattei to simulate the optimum energy solution via a computer, often providing potential savings of 40%.

# Technical data

## 50 Hz

Model	Flow						Sound pressure level dB(A)	Power		Tension V/f	Air receiver l	Dimensions						Weight		
	8 bar 115 psig L		10 bar 150 psig H		13 bar 175 psig HH			kW	hp			Length	Width		Height		kg	lbs		
	m³/min	cfm	m³/min	cfm	m³/min	cfm							mm	inch	mm	inch			mm	inch
200	ERC 1	-	-	0,16	5,6	-	-	64	1,5	2	230/1	-	740	29,2	400	15,8	400	15,8	50	110
	ERC 2	-	-	0,24	8,5	-	-	70	2,2	3	230/1	-	740	29,2	400	15,8	400	15,8	55	121
	ERC 1	-	-	0,16	5,6	-	-	64	1,5	2	400/3	-	740	29,2	400	15,8	400	15,8	50	110
	ERC 2	-	-	0,24	8,5	-	-	70	2,2	3	400/3	-	740	29,2	400	15,8	400	15,8	55	121
	ERC 3	-	-	0,32	11,3	-	-	70	3	4	400/3	-	740	29,2	400	15,8	400	15,8	55	121
	ERCS 1	-	-	0,16	5,6	-	-	64	1,5	2	230/1	50	840	33,1	400	15,8	740	29,2	70	154
	ERCS 2	-	-	0,24	8,5	-	-	70	2,2	3	230/1	90	1110	43,7	410	16,2	800	31,5	85	187
	ERCS 1	-	-	0,16	5,6	-	-	64	1,5	2	400/3	50	840	33,1	400	15,8	740	29,2	70	154
	ERCS 2	-	-	0,24	8,5	-	-	70	2,2	3	400/3	90	1110	43,7	410	16,2	800	31,5	85	187
	ERCS 3	-	-	0,32	11,3	-	-	70	3	4	400/3	90	1110	43,7	410	16,2	800	31,5	85	187
	ERA 1	-	-	0,14	4,9	-	-	64	1,5	2	230/1	50	840	33,1	510	20,1	740	29,2	85	187
	ERA 2	-	-	0,19	6,7	-	-	70	2,2	3	230/1	90	1120	44,1	540	21,3	800	31,5	100	220
	ERA 1	-	-	0,14	4,9	-	-	64	1,5	2	400/3	50	840	33,1	510	20,1	740	28,8	85	187
	ERA 2	-	-	0,19	6,7	-	-	70	2,2	3	400/3	90	1120	44,1	540	21,3	800	31,5	100	220
	ERA 3	-	-	0,27	9,5	-	-	70	3	4	400/3	90	1120	44,1	540	21,3	980	38,6	105	231
500	ERC 4	0,7	24,7	0,53	18,7	0,49	17,3	71	4	5	400/3	-	1020	40,2	500	19,7	690	27,2	120	264
	ERC 5	0,89	31,4	0,76	26,8	0,57	20,1	71	5,5	7,5	400/3	-	1020	40,2	500	19,7	690	27,2	120	264
	ERC 7	1,38	48,7	1,15	40,6	0,96	33,9	75	7,5	10	400/3	-	1300	51,2	540	21,3	790	31,1	180	396
	ERC 11	1,97	69,6	1,7	60	1,35	47,7	75	11	15	400/3	-	1300	51,2	540	21,3	790	31,1	180	396
	ERCS 4	0,7	24,7	0,53	18,7	0,49	17,3	71	4	5	400/3	270	1640	64,6	580	22,9	1270	50,0	210	462
	ERCS 5	0,89	31,4	0,76	26,8	0,57	20,1	71	5,5	7,5	400/3	270	1640	64,6	580	22,9	1270	50,0	210	462
	ERCS 7	1,38	48,7	1,15	40,6	0,96	33,9	75	7,5	10	400/3	270	1640	64,6	600	23,6	1360	53,6	275	605
	ERCS 11	1,97	69,6	1,7	60	1,35	47,7	75	11	15	400/3	270	1640	64,6	600	23,6	1360	53,6	285	627
	ERCSE 4	0,7	24,7	0,53	18,7	0,49	17,3	71	4	5	400/3	270	1860	73,3	540	21,3	1240	48,9	260	572
	ERCSE 5	0,89	31,4	0,76	26,8	0,57	20,1	71	5,5	7,5	400/3	270	1860	73,3	540	21,3	1240	48,9	270	594
	ERCSE 7	1,38	48,7	1,15	40,6	0,96	33,9	75	7,5	10	400/3	270	2120	83,5	540	21,3	1330	52,4	330	726
ERCSE 11	1,97	69,6	1,7	60	1,35	47,7	75	11	15	400/3	270	2120	83,5	650	25,6	1480	58,3	370	814	
1000	ERC 15 (*)	2,7	95,3	2,2	77,7	1,87	66	79	15	20	400/3	-	1580	62,3	580	22,9	970	38,2	320	704
	ERC 18 (*)	3,28	115,8	2,64	93,2	2,26	79,8	79	18,5	25	400/3	-	1580	62,3	580	22,9	970	38,2	325	715
	ERC 22 (*)	3,75	132,4	3,2	113	2,57	90,7	79	22	30	400/3	-	1580	62,3	580	22,9	970	38,2	325	715
2000	ERC 30 (*)	5,62	198,4	4,67	164,9	3,67	129,6	84	30	40	400/3	-	1710	67,4	750	29,6	1290	50,8	600	1320
	ERC 37 (*)	6,8	240,1	5,65	199,5	4,8	169,5	84	37	50	400/3	-	1710	67,4	750	29,6	1290	50,8	700	1540
	ERC 45 (*)	8,28	292,4	7	247,2	5,85	206,6	84	45	60	400/3	-	1710	67,4	750	29,6	1290	50,8	730	1606
	ERC 55 (*)	-	-	8,9	314,3	7,1	250,7	84	55	75	400/3	-	1710	67,4	750	29,6	1290	50,8	740	1628

(\*) Available in the version with energy recovery system (R).

F.A.D. in accordance with ISO 1217, annex "C"

Sound pressure level according to ISO 2151, tolerance  $\pm 3$ dB(A).

Working pressure: 7,5 bar for version 8 bar - 9,5 bar for version 10 bar - 12,5 bar for version 13 bar

## 60 Hz

Model	Flow rate						Sound pressure level dB(A)	Power		Tension V/f	Air receiver l	Dimensions						Weight		
	8 bar 115 psig L		10 bar 150 psig H		13 bar 175 psig HH			kW	hp			Length		Width		Height		kg	lbs	
	m <sup>3</sup> /min	cfm	m <sup>3</sup> /min	cfm	m <sup>3</sup> /min	cfm						mm	inch	mm	inch	mm	inch			
200	ERC 1	-	-	0,2	5,1	-	-	66	1,5	2	230/1	-	740	29,2	400	15,8	400	15,8	50	110
	ERC 2	-	-	0,28	6,9	-	-	66	2,2	3	230/1	-	740	29,2	400	15,8	400	15,8	55	121
	ERC 1	-	-	0,2	5,1	-	-	66	1,5	2	460/3	-	740	29,2	400	15,8	400	15,8	50	110
	ERC 2	-	-	0,28	6,9	-	-	66	2,2	3	460/3	-	740	29,2	400	15,8	400	15,8	55	121
	ERCS 1	-	-	0,2	5,1	-	-	66	1,5	2	230/1	50	840	33,1	400	15,8	740	29,2	70	154
	ERCS 2	-	-	0,28	6,9	-	-	66	2,2	3	230/1	90	1110	43,7	410	16,2	800	31,5	85	187
	ERCS 1	-	-	0,2	5,1	-	-	66	1,5	2	460/3	50	840	33,1	400	15,8	740	29,2	70	154
	ERCS 2	-	-	0,28	6,9	-	-	66	2,2	3	460/3	90	1110	43,7	410	16,2	800	31,5	85	187
500	ERC 4	0,73	25,8	0,63	22,2	0,43	15,2	73	4	5	460/3	-	1020	40,2	500	19,7	690	27,2	120	264
	ERC 5	1,02	36	0,82	29	0,69	24,4	73	5,5	7,5	460/3	-	1020	40,2	500	19,7	690	27,2	120	264
	ERC 7	1,39	49,1	1,2	42,4	1,18	41,7	77	7,5	10	460/3	-	1300	51,2	540	21,3	790	31,1	180	396
	ERC 11	2,11	74,5	1,87	66	1,65	58,3	77	11	15	460/3	-	1300	51,2	540	21,3	790	31,1	180	396
	ERCS 4	0,73	25,8	0,63	22,2	0,43	15,2	73	4	5	460/3	270	1640	64,6	580	22,9	1270	50,0	210	462
	ERCS 5	1,02	36	0,82	29	0,69	24,4	73	5,5	7,5	460/3	270	1640	64,6	580	22,9	1270	50,0	210	462
	ERCS 7	1,39	49,1	1,2	42,4	1,18	41,7	77	7,5	10	460/3	270	1640	64,6	600	23,6	1360	53,6	275	605
	ERCS 11	2,11	74,5	1,87	66	1,65	58,3	77	11	15	460/3	270	1640	64,6	600	23,6	1360	53,6	285	627
1000	ERC 15 (*)	3,01	106,3	2,65	93,6	2,4	84,7	81	15	20	460/3	-	1580	62,3	580	22,9	970	38,2	320	704
	ERC 18 (*)	3,67	129,6	3,18	112,3	2,58	91,1	81	18,5	25	460/3	-	1580	62,3	580	22,9	970	38,2	325	715
	ERC 22 (*)	3,95	139,5	3,6	127,1	3,1	109,5	81	22	30	460/3	-	1580	62,3	580	22,9	970	38,2	325	715
2000	ERC 30 (*)	6	211,9	5,7	201,3	4,9	173	86	30	40	460/3	-	1710	67,4	750	29,6	1290	50,8	600	1320
	ERC 37 (*)	7,4	261,3	6,9	243,6	5,85	206,6	86	37	50	460/3	-	1710	67,4	750	29,6	1290	50,8	700	1540
	ERC 45 (*)	9,9	349,6	8,7	307,2	7,2	254,2	86	45	60	460/3	-	1710	67,4	750	29,6	1290	50,8	730	1606

(\*) Available in the version with energy recovery system (R).

F.A.D. in accordance with ISO 1217, annex "C"

Sound pressure level according to ISO 2151, tolerance  $\pm 3$ dB(A).

Working pressure: 7,5 bar for version 8 bar - 9,5 bar for version 10 bar - 12,5 bar for version 13 bar



**ITALY - ING. ENEA MATTEI SpA**

Strada Padana Superiore, 307  
20090 VIMODRONE (MI)  
Tel + 39 02253051 - Fax +39 0225305243  
E-mail: info@mattei.it

**M.T.A. SpA**

**Mattei Service Partner**

C.so Italia, 47  
24049 Verdello-Zingonia (BG)  
Tel +39 035 4186400 - Fax +39 035 4186490  
E-mail: info@mta.bg.it

**[www.matteigroup.com](http://www.matteigroup.com)**

**UNI EN ISO 9001:2008**

**FRANCE**

MATTEI COMPRESSEURS Sarl  
Phone +33 1 48609860 - Fax +33 1 48609870  
E-MAIL: infos@mattei.fr - www.mattei.fr

**GERMANY**

MATTEI KOMPRESSOREN DEUTSCHLAND GmbH  
Phone +49 7151 5002560 - Fax +49 7151 5002565  
E-MAIL: info@mattei-kompressoren.de - www.mattei-kompressoren.de

**GREAT BRITAIN**

MATTEI COMPRESSORS Ltd  
Phone +44 (0)1789 450577 - Fax +44 (0)1789 450698  
E-MAIL: info@mattei.co.uk - www.mattei.co.uk

**U.S.A.**

MATTEI COMPRESSORS Inc  
Phone +1 410 5217020 - Fax +1 410 5217024  
E-MAIL: info@matteicomp.com - www.matteicomp.com

**RUSSIAN FEDERATION**

ING. ENEA MATTEI SpA  
Phone +7-495-739 41 90 - Fax +7-495-739 41 90  
E-MAIL: mattei@inbox.ru

**SINGAPORE**

ING. ENEA MATTEI SpA  
Phone +65 6741 8187 - Fax +65 6741 6826  
E-MAIL: mattei@singnet.com.sg

**SPAIN**

ING. ENEA MATTEI SpA  
Phone +34 93 435 03 94 - Fax +34 93 455 26 76  
E-MAIL: info@mattei.it

**PEOPLE'S REPUBLIC OF CHINA**

Zhangjiagang  
OMIC AIR COMPRESSORS MANUFACTURING Co. Ltd  
WFOE by Ing. Enea Mattei SpA - Italy  
Tel: +86 512 56951120 Fax: +86 512 56951121  
E-MAIL: info@matteiomc.cn - www.matteiomc.cn