


A65 ACTUATOR

ACTUATORS *LINEAR ACTUATORS*



■ Applications



■ Colours

Silver Anodised



■ A65 ACTUATOR

- Linear-type actuator for use on roof vents or domes.
- Low noise operation.
- Supplied complete with slide bracket.
- High protection degree IP44.
- All electrical parts are double insulated and supplied with 1.5m cable.
- Choice of 180mm, 350mm, 550mm, 750mm, or 1000mm travel.




230V

24V

TECHNICAL DATA:

CODE	A65230	A6524
VOLTAGE	230VAC	24VDC
STROKE	180/350/550/750/1000mm	180/350/550/750/1000mm
THRUST FORCE	650N	650N
ABSORBED CURRENT	0.29A	1.5A
SPEED	10mm/s	10mm/s
PROTECTION CLASS	IP44	IP44
FLEX	1.5m (3 CORE)	1.5m (2 CORE)
COLOURS	SILVER ANODISED	SILVER ANODISED
LIMIT STOP	ELECTRONIC	ELECTRONIC
SAFETY STOP	ELECTRONIC	ELECTRONIC
MAX WINDOW WIDTH	< 1.25m	< 1.25m

DIMENSIONS:

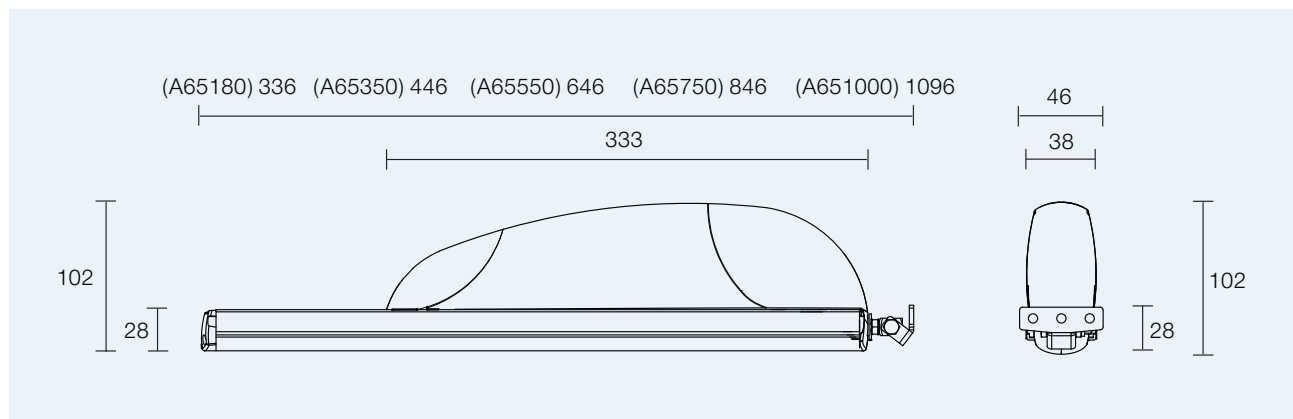

BRACKET TYPES:

A45/65/SLIDE

Slide Bracket

