



DREADNOUGHT UB: ANTHRACITE

D
Dreadnought UB
Entrance Area

Heckmondwike Entrance & Transition Area

Entrance Area

Features and Benefits


- British made
- Specially designed for entrance areas
- Will not ravel or fray
- Thermal properties conserve heat
- Acoustic properties reduce noise pollution
- Low maintenance costs
- Low installation costs



Products	Page
Battleship/Hippo	30 - 31
Diamond	32 - 33
Dreadnought UB	34 - 35
Vanquisher UB	36 - 37
Zephyr	38 - 39
Sticks & Stones	40 - 41



BH
Battleship/Hippo
Entrance Area



Blue




Indigo




Brown




Lincoln Green



Pale Olive



Slate



Anthracite




Ash Grey


Heckmondwike Battleship/Hippo

Entrance Area


Popular Battleship/Hippo is a dedicated entrance area carpet which is used extensively in education and public sector buildings as it has been designed to clean shoes and is ideal as an interceptor. Hippo comes with a rubber waffle backing and can be loose laid in small areas or footwells.




Pebble




Fiesta




Heath



Moorland


Specification	Battleship/Hippo
Fibre Construction	90% Polypropylene, 10% Recycled Polyester
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS6307 Methanamine Pill Test - Pass
Formats	Sheet 
Backing	Rubber Waffle (Hippo)
Size	2 metre and 4 metre. Ribbing runs down length of roll
Weight	1495gm metre ² (Battleship) 2379gm metre ² (Hippo)
Thickness	10.50mm (Battleship) 12mm (Hippo)

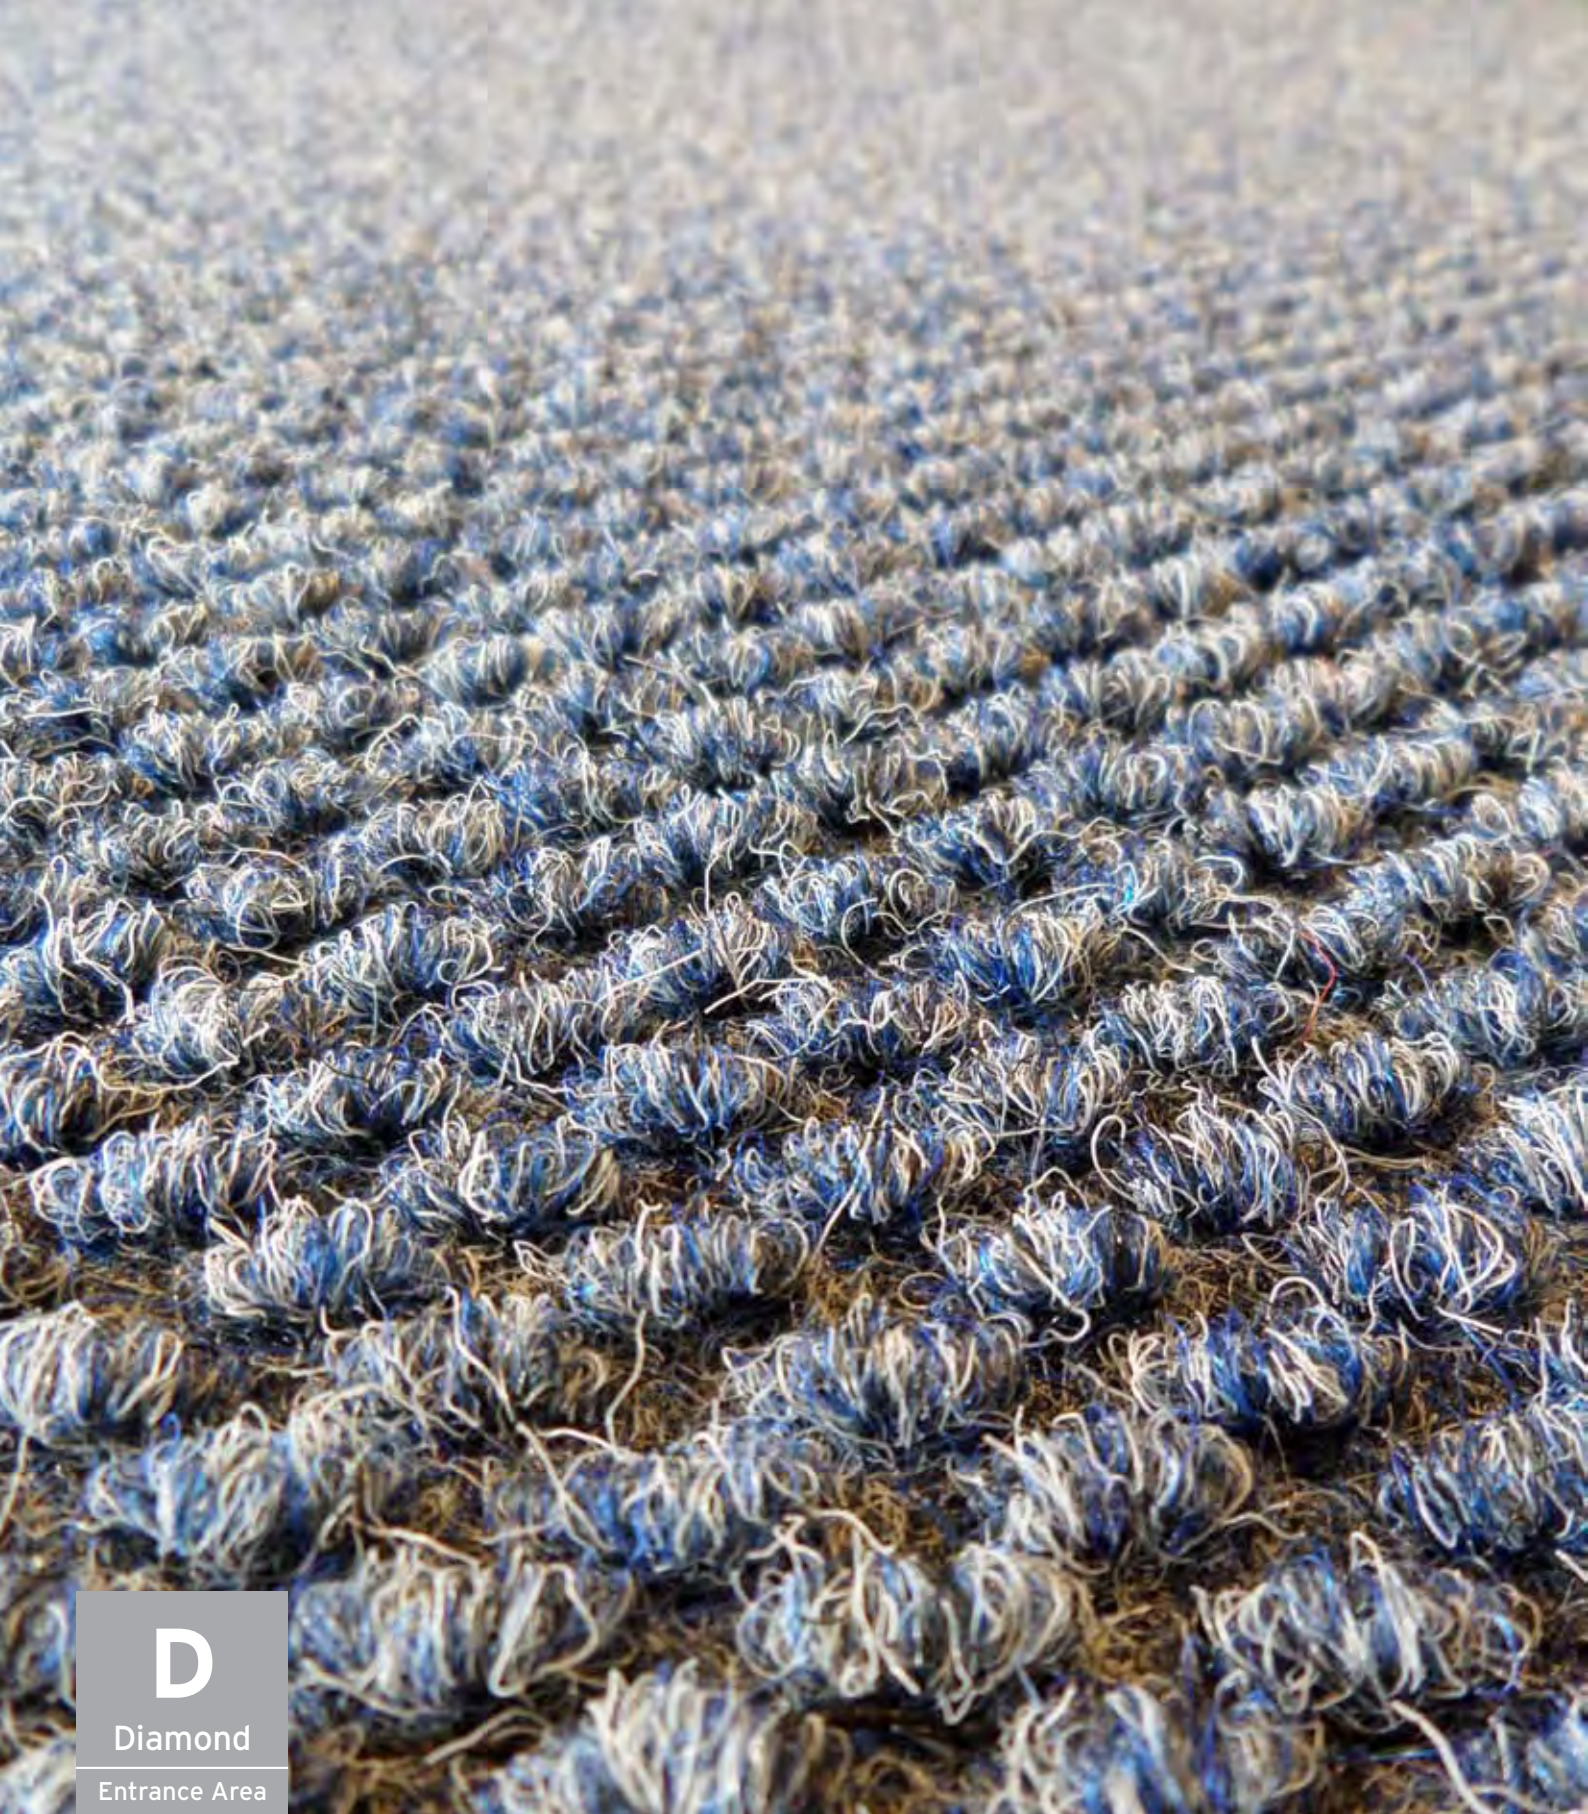

D
Diamond
Entrance Area




Beige




Charcoal




Indigo



Crystal Blue



Emerald






Silver


Heckmondwike Diamond

Entrance Area

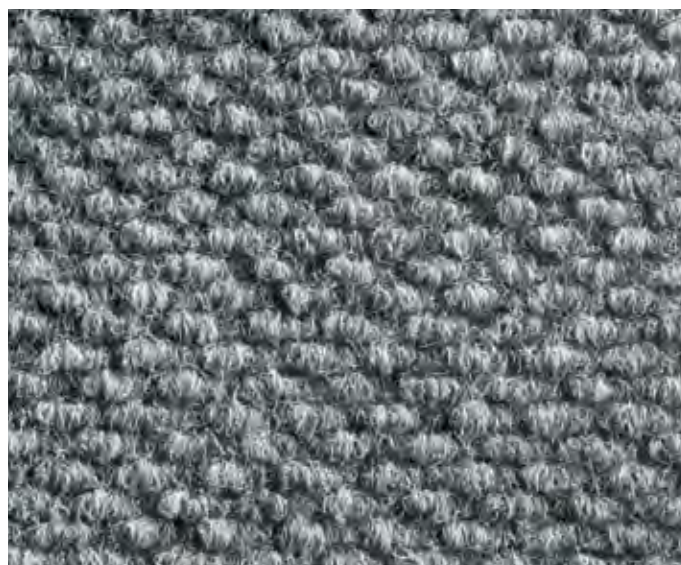Versatile Diamond, with a cobbled effect surface, is the popular choice for creating eye-catching entrance areas with bespoke logos and designs. Diamond has been used in wide variety of locations; from school receptions and hotel lobbies to office foyers and retail store entrances.




Specification	Diamond	
Fibre Construction (Sheet)	85% Polypropylene, 15% Recycled Polyester	
Fibre Construction (Tile)	85% Polypropylene, 15% Recycled Polyester	
Colour Fastness	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5	
Flammability	BS6307 Methanamine Pill Test - Pass	
Formats	Sheet 	Tiles 
Backing	Rubber Waffle	Bitumen
Size	2 metre. Ribbing runs down length of roll	50cm x 50cm
Weight	2500gm metre ²	4400gm metre ²
Thickness	10.50mm	11mm

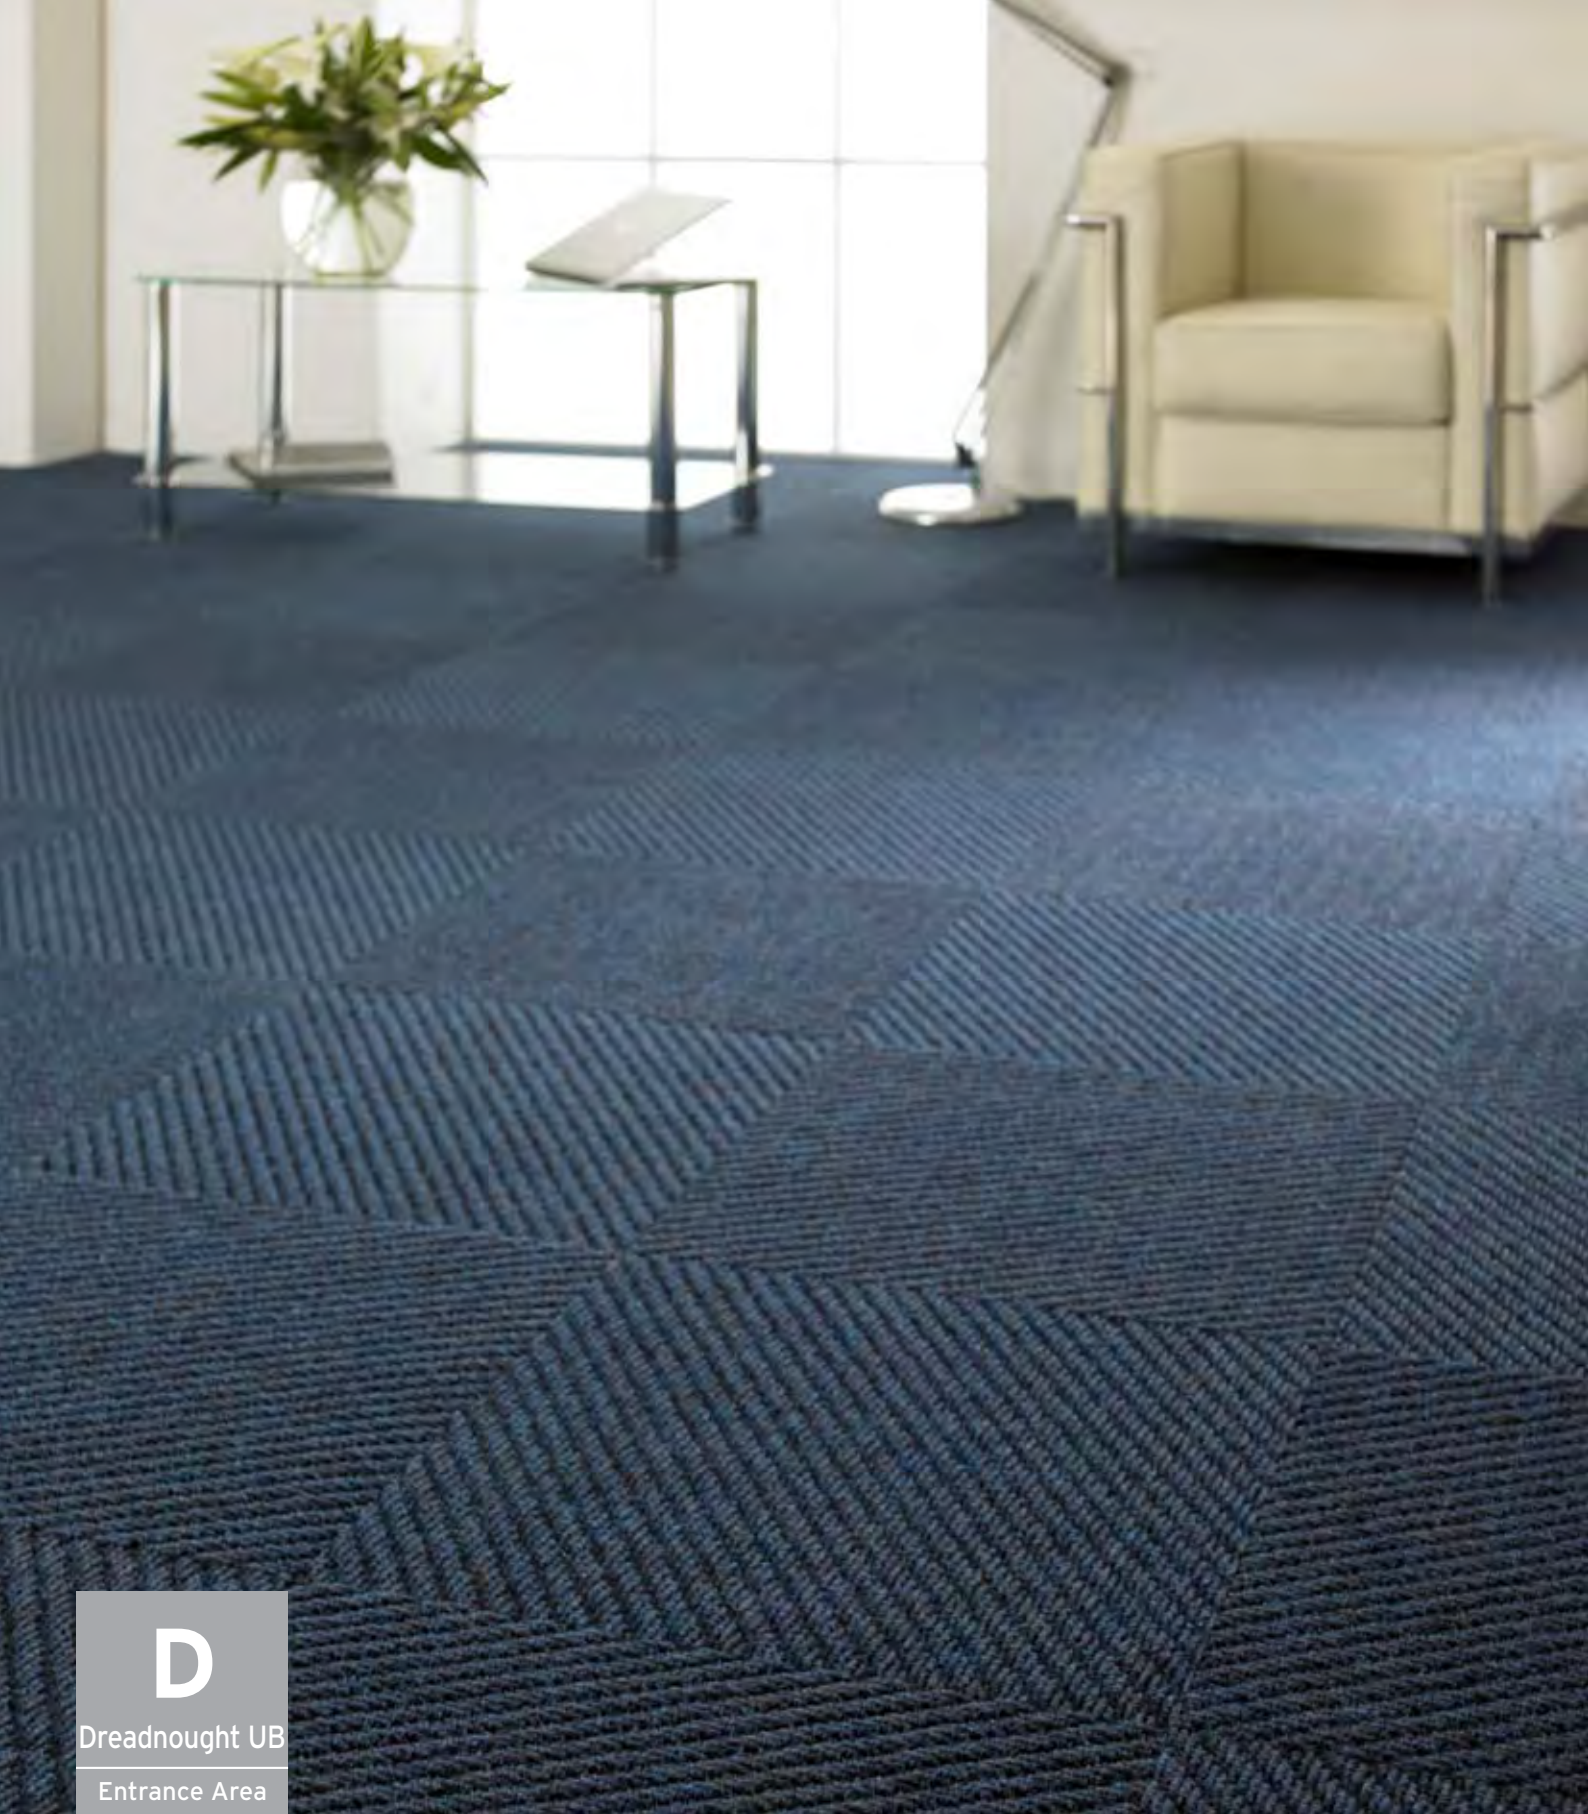


D

Dreadnought UB


Entrance Area



Anthracite



Ash Grey




Fiesta



Indigo



Lincoln Green






Slate

Heckmondwike Dreadnought UB

Entrance Area

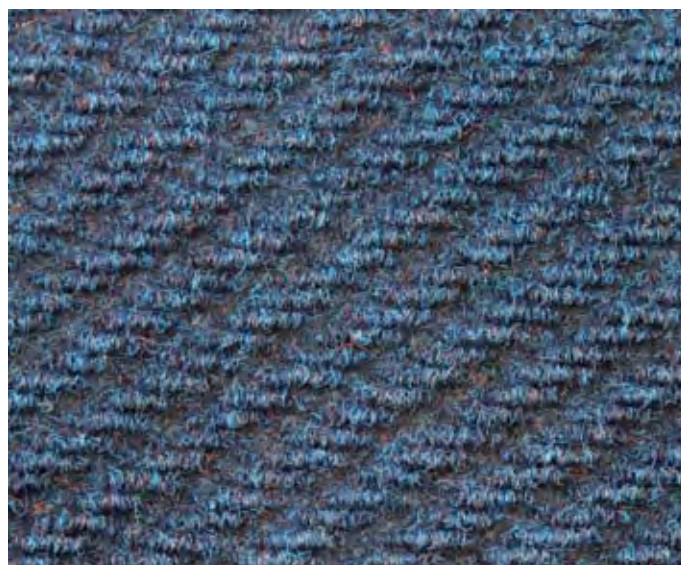Striking Dreadnought UB features an attractive diagonal, ribbed surface structure which is popular in schools, colleges and universities. In areas of heavy wear and tear, the high durability meets the performance expectations of heavy footfall.




Specification	Dreadnought UB	
Fibre Construction (Sheet)	90% Polypropylene, 10% Recycled Polyester	
Fibre Construction (Tile)	90% Polypropylene, 10% Recycled Polyester	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5	
Flammability	BS6307 Methanamine Pill Test - Pass	
Formats	Sheet 	Tiles 
Backing	-	Bitumen
Size	2 metre. Ribbing runs down length of roll	50cm x 50cm
Weight	1494gm metre ²	3994gm metre ²
Thickness	11mm	11mm



V
Vanquisher UB
Entrance Area




Charcoal



Deep Blue



Kingfisher




Onyx

Heckmondwike Vanquisher UB

Entrance Area

The alternative rib and velour surface pattern on Vanquisher UB is specially designed for entrance areas of public buildings, including schools, universities and colleges. As a specialist entrance area carpet, Vanquisher UB can be used to protect internal carpets from outside soiling and moisture.



Specification	Vanquisher UB
Fibre Construction	90% Polypropylene, 10% Recycled Polyester
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5
Flammability	BS6307 Methanamine Pill Test - Pass
Formats	Sheet 
Size	2 metre. Ribbing runs down length of roll
Weight	1470gm metre ²
Thickness	11.50mm



Z
Zephyr
Entrance Area



Charcoal



Indigo





Silver

Heckmondwike Zephyr

Entrance Area

Zephyr has been manufactured with heavier weight fibre to create a very hardwearing product that can be used in entrances, corridors and transition areas. The tight rib design is easy to maintain and is highly cost competitive.



Specification	Zephyr	
Fibre Construction (Sheet)	85% Polypropylene, 15% Recycled Polyester	
Fibre Construction (Tile)	85% Polypropylene, 15% Recycled Polyester	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5	
Flammability	BS6307 Methanamine Pill Test - Pass	
Formats	Sheet 	Tiles 
Backing	-	Bitumen
Size	2 metre. Ribbing runs down length of roll	50cm x 50cm
Weight	1900gm metre ²	4400gm metre ²
Thickness	10mm	11mm



ST

Sticks & Stones

Entrance Area

STICKS & STONES




Charcoal

Heckmondwike Sticks & Stones

Entrance Area

Sticks & Stones has a striking alternating diagonal motif and has been designed to offer a creative entrance floor design that is extremely tough, durable and easy to maintain.



Specification	Sticks & Stones
Fibre Construction	85% Polypropylene, 15% Recycled Polyester
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO105:B01) 5 Dry Rubbing (BS EN ISO105:X12) 5
Flammability	BS6307 Methanamine Pill Test - Pass
Formats	Sticks & Stones 
Backing	Bitumen
Size	50cm x 50cm
Weight	4625gm metre ²
Thickness	13mm