


HAZARDOUS AREA GAS SENSOR

- Installation:** The enclosure must be fixed into position using the external fixing lugs provided. Under no circumstances must the enclosure be supported by way of any cable entry device.
It is important that the cover is securely fitted to the body of the enclosure.
The cover locking screw must be fully tightened down.
- Special conditions for safe use:** (x) The unit should not be used as a safety related device in accordance with directive 94/9/EC.
- T Ratings:** The marking on the label on the cover must comply with the ambient temperature into which the enclosure is being installed.
- Earthing:** The enclosure is fitted with an M5 external earth connection; a suitable ring type terminal lug must be used to secure the earth conductor. The F6 sensor body mounting thread must be fully engaged into the junction box.
- Maintenance:** Periodic inspection of this equipment is necessary, refer to EN 60079-17 Clause 4.3 for guidance. Inspect the sinter disc at 6 monthly intervals to ensure it is clear and dust free.
- The enclosure is intended for use under normal industrial conditions and must not be installed in an area where extreme vibration may occur.
- This apparatus has been produced for use in a potentially explosive atmosphere. Before it is installed you must be aware of the requirements of BSEN60079, BSEN50014 and IEC61241.
- All unused terminals must be fully tightened down prior to making live.
- Do not open the Junction Box or remove the F6 sensor end cap when a hazardous gas atmosphere is present.
- All cable entries should be made using suitably certified glands.
- All unused gland ports should be sealed using appropriate certified stopping plugs.
- Caution: The installation of this product must be carried out by suitably trained and qualified personnel only. We will not accept responsibility for any damage, injury or any form of loss due to products not being installed or used in strict accordance with these instructions. If in doubt, please contact GDS.**
- To maintain the certification, only manufacturers supplied spare parts should be used.

Type: XDI Detector Head
Notified Body: SIRA Certification Services, Chester UK CH4 9JN
FTZU Physical Testing Institute
Ostarva-Radvanice
QA Notification: SIRA 00ATEXM071
Certification: See enclosure for details
Terminal Enclosure EExd IIC (T6) T85°C
II2GD Tamb -40°C to 80°C
SIRA Cert No: 03ATEX1176X
FTZU Cert No: 03ATEX0207U
Certification: F6 Gas Sensor EExd IIC (T6) T85°C
II 2GD Tamb -20°C to 35°C
IP Rating: IP63 + Weather Shield IP64
Entries: 2 - 20mm 1.5 pitch - options
Weight: XDI - 1.2Kg
XDI win - 1.5Kg
Fixing: Two M7 1127mm CRS

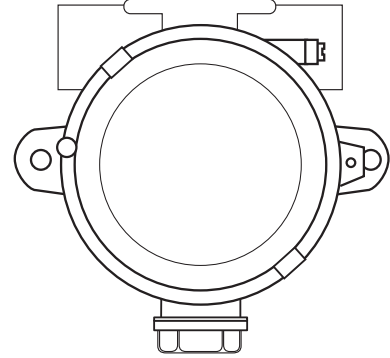


C1010

GDS Technologies Ltd declare under our sole responsibility that the product conforms with the relevant provisions of directive 94/9/EC of 23 March 1994.

HAZARDOUS AREA GAS SENSOR

- Installation:** The enclosure must be fixed into position using the external fixing lugs provided. Under no circumstances must the enclosure be supported by way of any cable entry device.
It is important that the cover is securely fitted to the body of the enclosure.
The cover locking screw must be fully tightened down.
- Special conditions for safe use:** (x) The unit should not be used as a safety related device in accordance with directive 94/9/EC.
- T Ratings:** The marking on the label on the cover must comply with the ambient temperature into which the enclosure is being installed.
- Earthing:** The enclosure is fitted with an M5 external earth connection; a suitable ring type terminal lug must be used to secure the earth conductor. The F6 sensor body mounting thread must be fully engaged into the junction box.
- Maintenance:** Periodic inspection of this equipment is necessary, refer to EN 60079-17 Clause 4.3 for guidance. Inspect the sinter disc at 6 monthly intervals to ensure it is clear and dust free.
- The enclosure is intended for use under normal industrial conditions and must not be installed in an area where extreme vibration may occur.
- This apparatus has been produced for use in a potentially explosive atmosphere. Before it is installed you must be aware of the requirements of BSEN60079, BSEN50014 and IEC61241.
- All unused terminals must be fully tightened down prior to making live.
- Do not open the Junction Box or remove the F6 sensor end cap when a hazardous gas atmosphere is present.
- All cable entries should be made using suitably certified glands.
- All unused gland ports should be sealed using appropriate certified stopping plugs.
- Caution: The installation of this product must be carried out by suitably trained and qualified personnel only. We will not accept responsibility for any damage, injury or any form of loss due to products not being installed or used in strict accordance with these instructions. If in doubt, please contact GDS.**
- To maintain the certification, only manufacturers supplied spare parts should be used.

Type: XDI Detector Head
Notified Body: SIRA Certification Services, Chester UK CH4 9JN
FTZU Physical Testing Institute
Ostarva-Radvanice
QA Notification: SIRA 00ATEXM071
Certification: See enclosure for details
Terminal Enclosure EExd IIC (T6) T85°C
II2GD Tamb -40°C to 80°C
SIRA Cert No: 03ATEX1176X
FTZU Cert No: 03ATEX0207U
Certification: F6 Gas Sensor EExd IIC (T6) T85°C
II 2GD Tamb -20°C to 35°C
IP Rating: IP63 + Weather Shield IP64
Entries: 2 - 20mm 1.5 pitch - options
Weight: XDI - 1.2Kg
XDI win - 1.5Kg
Fixing: Two M7 1127mm CRS

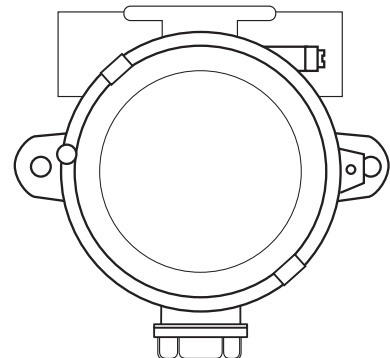

C1010

GDS Technologies Ltd declare under our sole responsibility that the product conforms with the relevant provisions of directive 94/9/EC of 23 March 1994.