

We measure it.



Instruments for Contractors

Heating, Ventilation, Air Conditioning & Refrigeration Instruments from Testo

01420 544 433

www.testolimited.com/heating

Testo Instruments for HVAC-R Contractors

High quality, robust instruments for all your daily needs:

- | | | | |
|--|-------------|---|-------------|
| • Flue Gas Analysers | pages 2-6 | • Digital Vacuum Gauge & Refrigerant Leak Detectors | page 12 |
| • Smoke Pumps & Accessories | page 7 | • Thermometers | page 13 |
| • Gas Leak, CO & CO ₂ Detectors | page 8 | • Anemometers | pages 13-14 |
| • Thermal Imaging Cameras | page 9 | • Pressure Meters | page 14 |
| • Digital Refrigerant Manifolds | pages 10-11 | • Service & Calibration | pages 15-16 |

Testo Flue Gas Analysers

When choosing a flue gas analyser careful selection is important to ensure it provides all the required features and is built to last in your environment. Whatever your needs or your budget, Testo has the right analyser for you. The following table provides an overview of the features of the Testo range. Full specifications, kit descriptions and prices are shown on the next 5 pages.

Colour graphic display
and long life sensors

testo 330



Colour graphic display

testo 320B



LCD display

testo 327



LED display

testo 310



Domestic
Flue Gas
Ambient CO
Pressure

Letby
Tightness
Timed CO
Build Up
Differential
Temperature

Memory

Commercial
Flue Gas

Testo 310 Entry Level Flue Gas Analyser with Pressure Measurement

- High quality, affordable FGA with draught, ambient CO and pressure measurement
- Fixed probe and 30 second start up make it quick and simple to use
- Meets the requirements of BS7967 and EN50379. Ideal for commissioning new boilers according to Gas Safe TB143



- Test menus for flue gas, ambient CO, draught and differential pressure
- Displays ratio, CO, O₂, CO₂, flue temperature, excess air and efficiency
- For use with all common fuel types
- 2 year instrument and sensor warranty
- USB rechargeable battery 10 hours life
- Automatic CO sensor protection shuts off pump



Technical Data

Temperature	0 to 400 °C
Draught	-20 to +20 mBar/hPa
Pressure	-40 to +40 mBar/hPa
O ₂	0 to 21 vol %
CO	0 to 4,000 ppm
CO ₂	Calculated
Ambient CO	0 to 4,000ppm accuracy +/-3ppm <20ppm; +/-5% >20ppm

Description	Part No.	Price £
Testo 310 Standard Kit Testo 310 analyser, hard case, rechargeable battery & USB mains charger, silicon hose for pressure, particle filters x 5, calibration protocol, probe 180mm with cone, spare pressure plugs	0563 3100	339.00
Testo 310 Printer Kit Testo 310 Standard Kit, plus testo printer	0563 3110	439.00
Recommended Accessories		
B1 Gas Cooker Grill Probe	300004 7967	41.00
B2 Angled Probe	300003 7967	37.00

Watch our short 'How to Use the Testo 310 Flue Gas Analyser' videos online at www.testolimited.com/fluegas

Testo 327 Multi-Function Flue Gas Analyser

- FGA with full range of measurements
- Large backlit LCD display
- High quality probe with fast filter replacement
- Automatic CO sensor protection
- Rechargeable li-ion batteries for long running time



- Measures flue gas, timed CO build up, let by & tightness, differential temperature, draught and pressure
- Independently tested to EN50379. Meets the requirements of BS7967 and Gas Safe Technical Bulletin TB143
- Displays ratio, CO, O₂, CO₂, flue & ambient temperature, excess air, gross & net efficiency and dew point
- For use with all common fuel types
- 3 year instrument and sensor warranty



Technical Data

Temperature	-40 to 600 °C
O ₂	0 to 21 Vol. %
Draught / Pressure	P1 ±40 mbar, P2 ±200 mbar
CO	0 to 4,000 ppm
CO ₂	calculated
Ambient CO	0 to 4,000ppm accuracy +/-3ppm <20ppm; +/-5% >20ppm

Description	Part No.	Price £
Testo 327-1 Standard Kit Testo 327-1 analyser, flue gas probe (180mm x 6mm Ø), mains unit and carry case	0563 3203 70	490.00
Testo 327-1 Advanced Kit Testo 327-1 Standard Kit, plus differential hose kit, differential temperature kit & Testo printer	0563 3203 71	595.00
CPA1 Accessory Kit B1 & B2 probes, hose connector, silicon hose, gas pressure controller, gas leak detector and FGA training memory stick	300554 1000	160.00

Testo 320B Multi-Function Flue Gas Analyser with Colour Graphic Display and Memory

- Advanced FGA with colour display
- Simple menu operation
- Memory to record measurements
- High quality probe with fast filter replacement
- USB rechargeable li-ion batteries for long running time and convenient charging



- Test menus for flue gas, timed CO build up, let by & tightness, diff. temperature, draught & pressure
- Independently tested to EN50379. Meets the requirements of BS7967 and Gas Safe TB143
- Displays ratio, CO, O₂, CO₂, flue & ambient temperature, excess air and gross & net efficiency
- For use with all common fuel types
- 3 year instrument and sensor warranty
- Memory up to 20 readings with USB data transfer to PC
- Automatic CO sensor protection shuts off pump



Technical Data

Temperature	-40 to 1,200 °C
O ₂	0 to 21 vol %
Draught	-9.99 to +40 mBar
CO	0 to 4,000 ppm
Pressure	0 to +300 mBar
CO ₂	Calculated
Ambient CO	0 to 4,000ppm accuracy +/-3ppm <20ppm; +/-5% >20ppm

Description	Part No.	Price £
Testo 320B Standard Kit Testo 320B analyser with O ₂ and CO sensors, hard case, battery & USB mains unit, 180mm flue gas probe	0563 3223 71	590.00
Testo 320B Advanced Kit Testo 320B Standard Kit, plus differential pressure kit, differential temperature kit and printer	0563 3223 72	720.00
CPA1 Accessory Kit B1 & B2 probes, hose connector, silicon hose, gas pressure controller, gas leak detector and FGA training memory stick	300554 1000	160.00

Watch our short 'How to Use the Testo 320B Flue Gas Analyser' videos online at www.testolimited.com/fluegas

Testo 330LL Professional Flue Gas Analyser for Domestic and Light Commercial Applications

- Longlife sensors lasting up to 6 years
- Optional Bluetooth connectivity
- Extended memory - to 500,000 readings
- Logger function for 2 hour continuous measurement
- 3 year instrument and sensor warranty
- Dilution to 30,000 ppm CO (330-2)

- Testo menus for flue gas, timed CO build up, let by & tightness, differential temperature, draught and pressure
- Independently tested to EN50379. Meets the requirements of BS7967 and Gas Safe TB143
- Displays ratio, CO, O₂, CO₂, flue & ambient temperature, excess air, gross & net efficiency and dew point
- For use with all common fuel types
- Rechargeable battery
- Optional NO sensor upgrade for NO_x reading
- Optional probes for CO, CO₂ & gas leakage
- Gas and oil rating






- Adjustable level CO sensor protection shuts off pump



Technical Data	Testo 330-1LL	Testo 330-2LL
Temperature	-40 to 1,200 °C	-40 to 1,200 °C
Draught	-9.99 to +40 mbar	-9.99 to +40 mbar
Pressure	0 to +300 mbar	0 to +300 mbar
CO	0 to 4,000 ppm	0 to 8,000 ppm
CO with dilution		Up to 30,000 ppm
Efficiency (Eta)	0 to 120 %	0 to 120 %
Flue gas loss	0 to 99.9 %	0 to 99.9 %
O ₂	0 to 21 % Vol.	0 to 21 % Vol.
Ambient (with CO probe)	0 to 500 ppm	0 to 500 ppm
Gas leak CH ₄ /C ₃ H ₈	0 to 10,000 ppm	0 to 10,000 ppm
CO ₂	0 to CO ₂ max.	0 to CO ₂ max.

Description	Part No.	Price £
Testo 330-1 Professional Set Testo 330-1, power supply/charger, flue gas probe (180mm x 6mm diameter) and carry case	0563 3371 70	1195.00
Testo 330-1 Professional Set with Printer Also includes Testo printer and pack of 6 paper rolls	0563 3371 71	1370.00
Testo 330-2 Professional Set Testo 330-2, power supply/charger, flue gas probe (300mm x 8mm diameter) and carry case	0563 3372 70	1430.00
Testo 330-2 Professional Set with Printer Also includes Testo printer and pack of 6 paper rolls	0563 3372 71	1595.00

Printers and Accessories for Flue Gas Analysers

Description	Part No.	Price £
 Testo IR Printer Infrared printer, includes 1 roll of thermal paper and batteries. (For use with Testo 310 only)	0554 3100	114.00
 Testo IRDA Printer This printer offers a faster print out of readings via IRDA interface and includes 1 roll of thermal paper and batteries. (For use with 310, 320B, 327, 330, 340 and 350)	0554 0549	171.00
 Testo Bluetooth Printer Fast documentation for the Testo 327, 330, 308 and 350 instruments with Bluetooth. Allows inclusion of company logo on print out and includes 1 roll of thermal paper and batteries.	0554 0553	301.00
Pack of six thermal printer rolls with 10 year legibility. (For models: 0554 3100, 0554 0549, 0554 0553)	0554 0568	19.49

An extensive range of additional probes, connectors, hoses and consumables, such as filters, are also available. For details please visit www.testolimited.com/heating or call 01420 566 841.

Testo 308 Digital Smoke Tester

- Digital read-out of the smoke number
- Automatic feed of smoke paper
- Repeatable, accurate measurements every time
- Automatic calculation of average smoke number
- Time saving through a fully automatic pump
- Readings unaffected by condensation
- IR and IrDa interfaces for wireless communication
- Backlit display



Description	Part No.	Price £
Testo 308 , includes mains unit, carry case	0563 3080	225.00
Testo 308 plus Accessories , mains unit, carry case, steel cone and filter paper	300563 3088	255.00
Testo 308 Bluetooth plus Accessories , mains unit, carry case, steel cone & smoke paper	300563 3087	530.00

Technical Data

Pump	1.63 ± 0.07 ltr/min
Weight	350g
Size	95 x 50 x 250 mm

Testo Smoke Pump

Smoke tester including smoke paper sheet, smoke chart and cone.

Part no. 300554 0307 Price £108.00



Testo 317-2 Gas Leak Detector

- Shows gas concentration in visual bar display
- Increasing alarm sounds with increasing gas concentration
- Continuous sound if threshold is exceeded

Technical Data			
Measuring range	0 to 10,000 ppm CH ₄		
1st alarm limit	from 200 ppm CH ₄	2nd alarm limit	10,000 ppm CH ₄

Testo 316-1 Gas Leak Detector for Pipe Work

- Detects even the smallest leaks. Monitors Methane.
- Flexible measurement probe for hard to reach locations
- Optical and audible alarms signal when limits are exceeded

Technical Data			
Measuring range	0 to 10,000 ppm CH ₄		
1st alarm limit	from 200 ppm CH ₄	2nd alarm limit	10,000 ppm CH ₄

Testo 317-3 CO Detection Monitor

- Detects the presence of dangerous levels of ambient carbon monoxide
- 3 year warranty on CO sensor
- Visual and audible alarm. Adjustable alarm threshold

Technical Data	
Measuring range	0 to +1999, ppm
Accuracy	±3 ppm (0 to +29 ppm), ±10 ppm (+30 to +99 ppm), ±10 % (+100 ppm)

Testo 315-3 CO & CO₂ Monitor

- Measures CO and CO₂ in ambient air
- Approved to EN50543 for commercial kitchens
- Optional temperature and humidity probe


Technical Data	CO	CO ₂
Measuring range	0 to 100 ppm	0 to 10,000 ppm
Accuracy	±3 ppm (0 to 20 ppm) ±5 ppm (>20 ppm)	±8% of mv (4,000 to 6,000 ppm) ±500 ppm (6,000 to 10,000 ppm)



Description	Part No.	Price £
Testo 317-2, flue gas leak detector	0632 3172	137.70
Testo 316-1 gas leak detector	0632 0316	211.50
TopSafe case for Testo 316-1	0516 0189	44.10
Testo 317-3 CO monitor	0632 3173	146.00
Testo 315-3 with case	300632 3153	595.00
Testo 315-3 with case & printer	300632 3155	695.00
Temperature and humidity probe for Testo 315-3	0636 9725	91.25

Thermal Imaging Cameras for Heating and Plumbing

- Find concealed flues in voids
- Trace pipework & locate leaks
- Identify power flushing requirements
- Map underfloor heating systems
- Check solar panels
- Inspect heat pumps

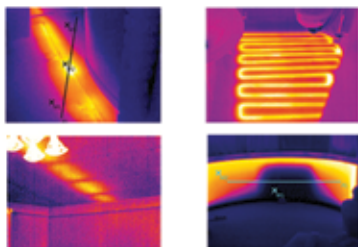

Testo 870

- Infrared resolution 160 x 120 pixels
- Thermal sensitivity of 100 mK
- Fixed focus 34° lens with 10cm minimum focus distance
- Integrated digital camera (870-2 only)
- Automatic recognition of hot / cold spots
- On board gallery for approx. 2,000 images

Testo 875i

- Infrared resolution 160 x 120 pixels
- Thermal sensitivity of 50 mK
- Manual Fine Focus 32° lens with 10cm minimum focus distance
- Integrated digital camera
- Built-in laser pointer
- Testo 875i-2 also offers voice recording, high temperature function and power LEDs
- Measurement mode for detecting mould-risk areas (875-2i only)
- SD card gallery for approx. 2,000 images
- High temperature option to 550°C (875-2i only)



Technical Data

	testo 870-1	testo 870-2	testo 875-1/2i
Infrared resolution	160 x 120	160 x 120	160 x 120
Thermal sensitivity (NETD)	<100 mK	<100 mK	<50 mK
Temperature range	-20 to +280 °C	-20 to +280 °C	-30 to +350 °C
Lens	34° fixed focus	34° fixed focus	32° manual focus
Integrated digital camera	No	Yes	Yes
IR Soft professional software	Yes	Yes	Yes

Description	Part No.	Price £
Testo 870-1 Kit: Testo 870-1, li-ion battery, USB cable, IR Soft, soft carry case	300560 8701	1370.00
Testo 870-2 Kit: Testo 870-2, li-ion battery, USB cable, IR Soft, hard carry case	0560 8702	1850.00
Testo 875-1i: Testo 875-1i, li-ion battery, USB cable, SD card, IR Soft, hard carry case	0563 0875 V1	2305.00
Testo 875-2i: Testo 875-2i display of surface moisture, voice recording, li-ion battery, USB cable, SD card, IR Soft, hard carry case	0563 0875 V2	3145.00
Testo 875-2i Kit: As Testo 875-2i plus telephoto lens 9°x7°, lens protection glass, additional battery and fast battery charger	0563 0875 V3	4059.00

Testo 550 & 557 Digital Refrigeration Manifolds

- **Testo 550** - for servicing & charging of air conditioning / refrigeration systems
- **Testo 557** - for servicing, maintenance & commissioning air conditioning / refrigeration systems

Testo 550 :

- Superheating and subcooling in real-time by means of two external temperature probes (NTC)
- Vacuum indication
- Temperature compensated tightness test
- Heat pump mode, automatic switching of high/ low pressure
- Display of Min/Max/Mean and differential temp.
- 2 way-valve block
- 39 refrigerants stored in the instrument

Testo 557 : all features of the Testo 550, plus

- Integrated vacuum measurement aids the evacuation of the system
- 4-way valve block allows fast and efficient work



Technical Data	Testo 550	Testo 557
Measuring range	Temp: - 50 to + 150 °C / Vacuum: -1 bar to 0 bar	Temp: - 50 to + 150 °C / Vacuum: -1 bar to 0 bar
Pressure range	High: 60/60 bar rel Low: 40/40 bar rel	High: 52/52 bar Low: 50/50 bar rel
Accuracy (at 22°C)	Pressure: ± 0.75 % fs Temp: ± 0.5 °C Vacuum: 0.3 bar	Pressure: ± 0.5% fs Temp: ± 0.5 °C Vacuum: - 1% fs
Resolution	Pressure: 0.01 bar / 0.1 psi / Temp: 0.1 °C/0,1 °F Vacuum: 0.01 bar	Pressure: 0.01 bar / 0.1 psi / Temp: 0.1 °C/0,1 °F Vacuum: 1mbar / 1hPa
Connection Hose	3x1/4" - SAE	3x1/4" - SAE 1x3/8" - SAE

Description	Part No.	Price £
Testo 550-1 Kit * Includes manifold, 1 plier probe, transport case, batteries, manual and calibration protocol.	0563 5505	237.60
Testo 550-2 Kit * Includes manifold, 2 plier probes, transport case, batteries, manual and calibration protocol.	0563 5506	303.93
Testo 550-2 / Testo 552 Kit * Includes manifold, 2 plier probes, transport case, batteries, manual, calibration protocol & Testo 552	300563 5504	419.00
Testo 557-2 * Includes manifold, 2 plier probes, transport case, batteries, manual and calibration protocol	0563 5572	422.00

* Hoses not included

Testo 570 Digital Refrigeration Manifold

- Digital manifold for all aspects of air conditioning / refrigeration servicing, maintenance, commissioning and investigation, with extensive analysis and documentation

- 4-way valve block with 3 temperature probe connectors
- Integrated vacuum measurement supports evacuation of the system
- Heat pump mode and display of high and low pressure, as well as temperature
- Temperature-compensated tightness testing
- Additional calculation of superheating and subcooling
- Computer-supported monitoring of a system with up to 999h of measurement value recording
- EasyKool software with extended features
- Refrigerant management and administration of exact filling levels
- 40 refrigerants stored



Technical Data

Measuring range	Vacuum: -1 bar to 0 bar
Pressure range	High: 52/52 bar Low: 50/50 bar rel
Accuracy (at 22°C)	Pressure: ± 0.5% fs Temp: ± 0.5 °C Vacuum: - 1% fs
Resolution	Pressure: 0.01 bar / 0.1 psi Temp: 0.1 °C/0.1 °F Vacuum: 1mbar / 1hPa
Connection Hose	3x1/4" - SAE 1x3/8" - SAE

Description	Part No.	Price £
Testo 570-1* Includes manifold, plier probe, batteries and calibration protocol	300563 5705	525.69
Testo 570-2* Includes manifold, 2 plier probes, transport case, software including USB cable, mains unit, batteries and calibration protocol	300563 5706	678.15
Plier probe (NTC) for pipe Ø 6x35mm	0613 5505	42.57
Pipe wrap probe with Velcro for pipe Ø to max. 75 mm, Tmax. +75°C, NTC	0613 4611	78.33
Current probe for measuring current consumption of compressors, with switchable measuring range	0554 5607	153.00
Oil pressure probe for checking oil level in the compressor	0638 1742	224.73
Software EasyKool	0554 5604	226.71
Testo printer	0554 0549	171.00

Testo 552 Digital Vacuum Gauge

Digital vacuum measuring instrument for the evacuation of refrigeration systems and heat pumps. It measures even the smallest absolute pressures and provides highly precise information on the status of the dehumidification of a system.

- Maintenance-free absolute pressure sensor
- 2,400 hours battery life
- Measurement of H₂O evaporation temperature
- Optical alarm when limit values are exceeded



Technical Data

Vacuum measuring range	1100 - 0 mbar / 825080 - 0 micron
Sensor overload absolute	6 bar / 87 psi (relative: 5 bar / 72 psi)
Vacuum resolution	0.01 hPa / 10 micron
Vacuum precision	0 to 1.33 hPa / 0 to 1000 micron: up to ±10 micron 0 to 200 hPa / 0 to 150000 micron: ± 0.3% FS = ±0.6 hPa 200 to 1100 hPa / 150000 to 825080 micron: ±0.3% FS = ±3.3 hPa

Description	Part No.	Price £
Testo 552 digital vacuum gauge	0560 5520	148.50

Testo 316-3/4 Refrigerant Gas Leak Detectors

Testo 316-3

- Detects even the smallest leaks thanks to its high sensitivity < 4 g/a
- Complies with EN14624, fulfils the requirements of the F-gas regulation as well as the standards regulator SAE J1627
- Detects all common refrigerants
- Easiest possible operation thanks to a single button
- Immediate readiness with no pre-settings
- LED indicator of leakage with simultaneous audible alarm



Testo 316-4

In addition, the Testo 316-4 offers:

- 3g/year sensitivity as EN14624
- Digital display with audible and visual alarms

Technical Data	Testo 316-3	Testo 316-4
Sensitivity	4 g/a (0.15 oz/a)	3g/a (0.1 oz/a)
Detectable refrigerants	R-22, R134a, R-404A, R-410A, R-507, R438A and all CFCs, HFCs, and HCFCs	R134a, R22, R404a, H2 and all common refrigerants such as CFC, HCFC, HFC, NH3 (separate head)
Operating temperature	-20 to +50 °C	-20 to +50 °C
Operating humidity	20 to 80 %RH	20 to 80 %RH
Battery life	16h permanent operation	6h permanent operation

Description	Part No.	Price £
Testo 316-3 Set, including sensor head, transport case calibration protocol, batteries and filter	0563 3163	247.50
Testo 316-4 Set, including sensor head, case, mains charging unit and ear plug	0563 3164	377.10



Thermometers

Calibration Available
Contact 01420 566 845

Testo 810 Air & Surface Thermometer

- Pocket-sized thermometer for air and surface temperature measurement
- Surface temperature IR measurement with 1-point laser spot marking and 6:1 optics
- Air temperature measurement
- Display of differential temperature e.g. between surface and air
- Hold function and max/min values

Technical Data	Surface	Air
Measuring range	-30 to +300°C	-10 to +50 °C
Accuracy	± 2.0 °C (-30 to +100 °C)	± 0.5 °C
Resolution	0.1 °C	0.1 °C

Description	Part No.	Price £
Testo 810 thermometer, includes wrist strap, belt holder, protective cap, calibration protocol and batteries	0560 0810	74.70



Testo 922 Fast Action Type K Thermometer

- 2 channel measuring instrument, with 2 line display
- Cyclical printing of readings (with optional printer)
- Continuous display of max/min values and Hold button to freeze reading
- Backlit display

Technical Data	
Measuring range	-50 to +1000 °C
Accuracy	±(0.5 °C +0.3% of mv) (-40 to +900 °C) ±(0.7 °C +0.5% of mv) (remaining range)
Resolution	0.1 °C (-50 to +199.9 °C), 1 °C (remaining range)

Description	Part No.	Price £
Testo 922 thermometer	0560 9221	121.00
Testo 922 HVAC Kit: includes 2 velcro pipe wrap probes, waterproof immersion probe & carry case	300563 9221	251.00



Vane Anemometers

Testo 410 Vane Anemometer

- Measures air flow of outlets and air temperature
- Integrated 40mm vane
- Timed mean value calculation
- Windchill factor calculation for outdoor areas
- Measurement units include m/s, km/h, mph, fpm, beaufort and knots
- Additional measurement of humidity - Testo 410-2 only

Technical Data	Range	Resolution	Accuracy
Flow velocity	0.4 – 20 m/s	0.1 m/s	+/-0,2 m/s +2%
Temperature	-10 to 50°C	0.1°C	+/-0.5C

Description	Part No.	Price £
Testo 410-1 vane anemometer	0560 4101	81.00
Testo 410-2 vane anemometer, with humidity	0560 4102	126.00



Testo 417 Vane Anemometer

- Ideal for complying with Building Regulations Part F
- Measures air velocity, volume and temperature
- Recognition of flow direction
- Min/Max and mean display
- Integrated 100mm vane can be used with optional flow funnels

Calibration Available
Contact 01420 566 845



Technical Data	Range	Accuracy	Resolution
Airflow	0.3 – 20 m/s	0.1 m/s	+/-0.1 m/s +1.5%
Temperature	-0 to 50°C	0.1°C	+/-0.5C

Description	Part No.	Price £
Testo 417 anemometer	0560 4170	320.00
Testo 417 F Reg kit, includes 2 attachable funnels (200x200mm & 330x300mm) and UKAS calibration	300563 4170	594.00

Pressure Meters

Testo 510 Differential Pressure Meter

- Measuring range of 0 to 100 mbar
- Gas pressure & flue draught measurement
- Duct flow velocity measurement with Pitot tube
- Air density and temperature compensated
- Switchable units: hPa, mbar, Pa mmH₂O, mmHg, inH₂O, inHg, psi, m/s, fpm

Technical Data	
Range	0-100 mbar
Resolution	0.01 mbar
Accuracy	±0.03 mbar (0...0.30 mbar), ±0.05 mbar (0.31...1.00 mbar), ±(0.1 mbar+1.5 % of reading) (rest of range)

Description	Part No.	Price £
Testo 510 differential pressure meter	0560 0510	116.10
Testo 510 with hoses	300563 0510	142.00



Testo 512 Differential Pressure & Flow Meter

- Range of 4 instruments offering a choice of flow units and pressure units, including hPa, kPa, psi and in H₂O
- Built-in density compensation
- Hold/max/min function

Technical Data	Range	Accuracy	Resolution
T512 0 to 2hPa	0 to +2 hPa	0.5% of fsv	0.001 hPa
T512 0 to +20 hPa	0 to +20 hPa	0.5% of fsv	0.01 hPa
T512 0 to +200 hPa	0 to +200 hPa	0.5% of fsv	0.1 hPa
T512 0 to +2000 hPa	0 to +2000 hPa	0.5% of fsv	1 hPa

Description	Part No.	Price £
Testo 512 0 to 2hPa	0560 5126	373.00
Testo 512 0 to +20 hPa	0560 5127	355.00
Testo 512 0 to +200 hPa	0560 5128	351.00
Testo 512 0 to +2000 hPa	0560 5129	362.00



Testo Service and Calibration

Testo Calibration Services (TCS) offers a wide range of instrument calibration to UK and international standards:

- **UKAS Accredited Calibration** - temperature, pressure, airflow, humidity, dew point and on-site temperature.
- **ISO Calibration** (traceable to national standards) - light, sound, rotational speed, surface temperature, infrared temperature, electrical simulation.

Find Out More

Full details can be found on our website www.testoservice.com or contact the Service Department on telephone **01420 566846** or email service@testo.co.uk

Flue Gas Analyser Service & Calibration



- Fixed Price Service and Calibration for Flue Gas Analysers
- One price covers calibration, repairs and replacement sensors
- Avoids unexpected repair bills



- Calibration certificate every time
- Includes calibration of gas sensors, temperature and pressure



- The fastest calibration turnaround in the business
- Average turnaround of just 4 working days
- See www.testolimited.com/service-tracker for current turnaround times



- UPS collection and return delivery service
- Convenient drop off / collection at reseller branches



- Free online app to check the progress of your FGA service
- Enter your serial number to see status: "Booked in", "Quoted", "Order processed", "Final inspection", "Dispatched"

Find Out More

Full details and prices for FGA Service are shown on the back cover of this brochure.

Flue Gas Analyser Service & Calibration

- Convenient drop off / collection at reseller branches or UPS collection and return delivery
- The fastest turnaround in the business - typically just 4 working days
- Check the progress of your service online at www.testolimited.com/servicetracker

Fixed Price Service & Calibration

- Clear cost of ownership and no unexpected bills
- Faster service processing and reduced lead times
- Includes ISO calibration certificate, spare parts and return carriage
- Choose from **Fixed Price** (additional costs in year 3 for sensor replacement) or **5 Year Fixed Price** (cost of sensor replacement spread evenly over 4 years)

Part No.	Price £	Year(s)	Description
Testo 310			
300000 0310	83.00	All	Testo 310 Standard Service & Calibration Certificate
300000 1310	99.80	1, 2 & 4	Testo 310 Fixed Price Service & Calibration. Includes all spare parts *
300000 3310	247.00	3	Testo 310 Fixed Price Service & Calibration. Includes all spare parts and gas sensors *
300000 5310	137.00	1 - 4	Testo 310 5 Year Fixed Price Service & Calibration. Includes all spare parts, gas sensors at year 3 and annual service & calibration *
Testo 327			
300000 0327	83.00	All	Testo 327 Standard Service & Calibration Certificate
300000 1327	104.00	1, 2 & 4	Testo 327 Fixed Price Service & Calibration. Includes all spare parts *
300000 3327	262.00	3	Testo 327 Fixed Price Service & Calibration. Includes all spare parts and gas sensors *
300000 5327	144.00	1 - 4	Testo 327 5 Year Fixed Price Service and Calibration. Includes all spare parts, gas sensors at year 3 and annual service and calibration *
Testo 320			
300000 0320	83.00	All	Testo 320 Standard Service & Calibration Certificate
300000 1320	104.00	1, 2 & 4	Testo 320 Fixed Price Service & Calibration. Includes all spare parts *
300000 3321	272.00	3	Testo 320B and 320-1 Fixed Price Service & Calibration. Includes all spare parts and gas sensors *
300000 3322	420.00	3	Testo 320-2 Fixed Price Service & Calibration. Includes all spare parts and gas sensors *
300000 5321	146.00	1 - 4	Testo 320B and 320-1 5 Year Fixed Price Service & Calibration. Includes all spare parts and gas sensors at year 3 plus annual service & calibration *
300000 5322	184.00	1 - 4	Testo 320-2 5 Year Fixed Price Service & Calibration. Includes all spare parts, O ₂ and CO sensor at year 3 and annual service and calibration *
Testo 330			
300000 0330	88.20	All	Testo 330 Standard Service & Calibration Certificate
300000 5330	110.00	1 - 4	Testo 330 5 Year Fixed Price Service & Calibration. Includes all spare parts *

* Includes all replacement parts, full service check and ISO calibration certificate. Excludes the cost of replacement PCB's and any damage through misuse. All prices include return carriage but exclude VAT. All prices are subject to annual increase.

To Book Your Service & Calibration

Visit www.testoservice.com or contact the Service Department on telephone **01420 566846** or email service@testo.co.uk

Produced by Testo Limited, January 2015. All prices & specifications correct at time of printing and subject to change without notice. For current information please see www.testolimited.com. Prices exclude VAT and carriage.