


Corner Guard Industrial - Installation Guide




Installation Diagrams : Specification Notes

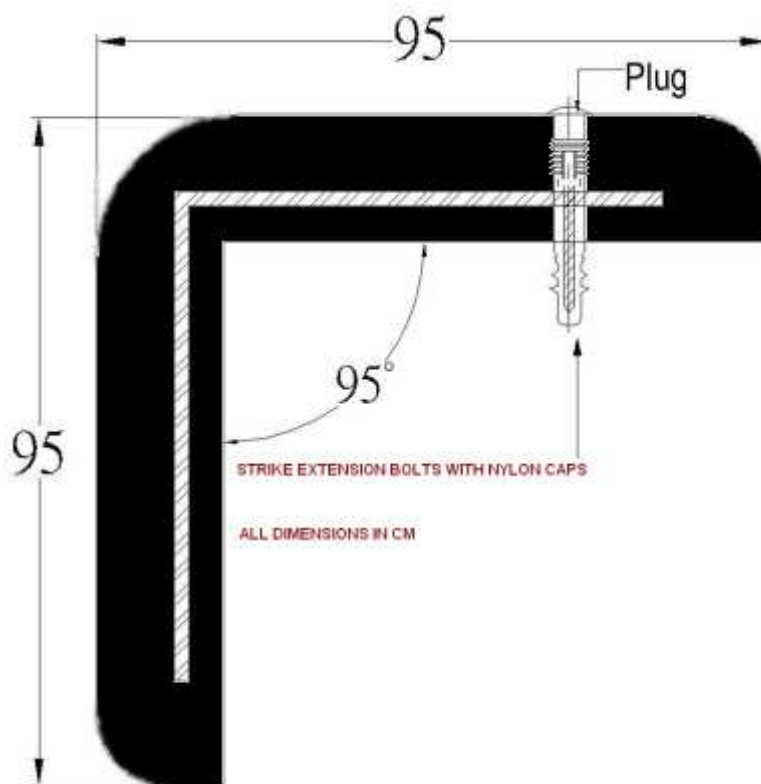

Dimensions: 1000 x 95 x 95 xmm. Padding is 18mm deep.

The wall guard is supplied pre-drilled and with fixing bolts and caps.
Cap the fitting holes with a push in nylon caps.

Min fitting height from the floor is 200mm as illustrated

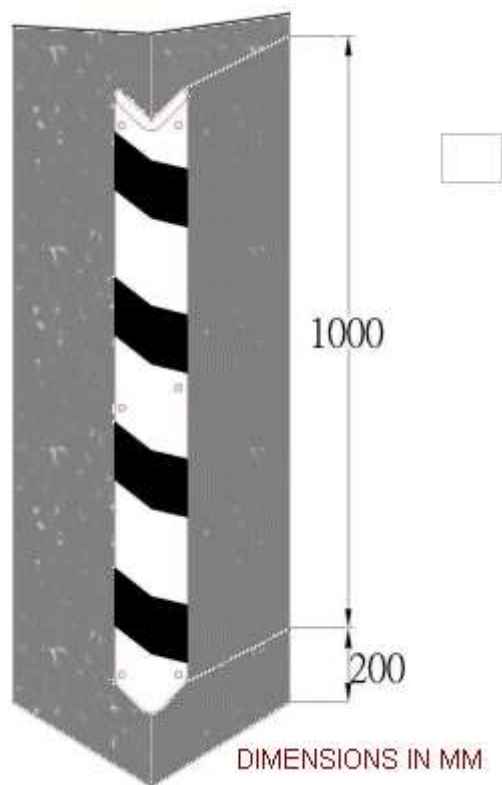

Material: Integral Skin Urethane with aluminum strip to increase strength
 Reflective tapes cover the corner guard strip.

Physical properties:

Compression set (%) 70 °C ,22 hrs: 37 (CNS 3560).
 Tensile Strength (kgf/cm): 42.1 (CNS 3553).
 Elongation (%): 79 (CNS 3553).
 Tear Strength (kgf/cm): 10.6 (CNS 3559):
 Aging Test: 100 °C ,70 hrs
 Tensile Strength (kgf/cm):46.3 (CNS 3553):
 Elongation(%): 75 (CNS 3553).
 Tear Strength (kgf/cm): 10.6 (CNS 3559):

Biological Agents:

Bacteriostasis of Aspergillus Niger BCRC 31512:
 According to the evaluation standard, Antifungal Test (ASTM G21-96), the resistant level of fungus is level 0

Antibacterial Tests of Staphylococcus Aureus

According to the evaluation standard, JIS Z2801, the value of antibacterial activity is 6.15.
 The value of antibacterial activity shall not be less than 2.0 for the antimicrobial efficacy

Safety Test:

According to the national standards CNS 4797-4797-3, 4798, 4798-1-3, 4798-10-37
 Meets the safety requirements of construction.
 Meets the safety requirements of non-flammability.
 Meet the safety requirements of toxicology (no heavy metal and no toluene):

Fire Tests:

Meets the requirement of the UL 94 HBF, Horizontal Burning Foamed Material Test, and EN 71 Part 2:

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com