

ORWAK®

Environmental Services

Model 3115

Benefits

- Savings on your waste collection
- Tidy premises
- Compliance to meet your legal obligations
- Space and time saving




BALERS

Model 3115

- Front loading
- One of the most compact balers in Orwak's product range
- Small footprint
- Equipped with autostart and material selector
- Adjustable bale size
- Modern design
- Service & maintenance indicator
- Single phase unit



A= 1990 mm
 B= 940 mm
 C= 790 mm
 D= 1535 mm
 E= 650 mm

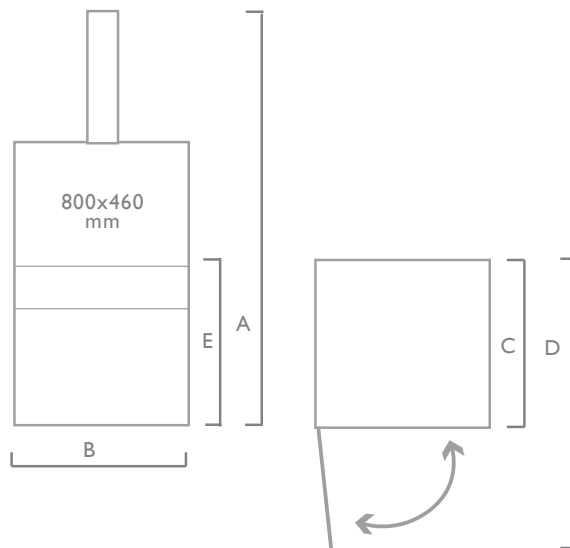

SPECIFICATIONS

CYCLE TIME

33 secs

LOADING APERTURE

Width: 800 mm
 Height: 460 mm

PRESS FORCE

HP: 6 ton, 60 kN
 LP: 4 ton, 40 kN

BALE SIZE

Height: 600 mm
 Width: 800 mm
 Depth: 600 mm
 Weight: 60kg cardboard
 50kg plastic

CHAMBER DIMENSION (INTERNAL)

Height: 1003 mm
 Width: 300 mm
 Depth: 600 mm
 Weight: 380 kg

TOPCOAT

Two-part paint and powder coat with phosphatising as base

HYDRAULIC DATA

Working pressure: 80/120 bar
 Relief pressure: 140 bar
 Press force HP: 6 ton, 60 kN
 Press force per cm²: 2,5 kg
 Piston stroke: 640 mm

OIL VOLUME/TYPE

Oil volume 7.7 l
 ISO VG 32-68 SAE 10
 from +5 °C and warmer

ELECTRICAL DATA

Single Phase 230V, 50 Hz, 10 A

PROTECTION CLASS

IP 55

NOISE LEVEL

< 62.4 (A)

VOLTAGE	FUSE	IP
I PHASE, 230 V, 50 HZ	10A	55

a **phs** Group company

Tel: 0121 565 7426 Fax: 0121 565 7427
 Email: orwaksales@phs.co.uk Website: www.orwak.co.uk
 Orwak Environmental Services Ltd, Unit 6,
 Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ

Printed on recycled paper