


Benefits

- Savings on your waste collection
- Tidy premises
- Compliance to meet your legal obligations
- Space and time saving
- Ability to segregate waste




Model 9020

- Innovative design, technically superior
- Top loader
- Multiple chambers available
- Allows a segregate and bale process

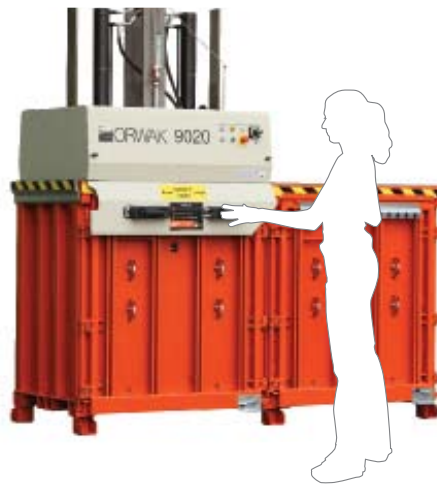

A= 2443 mm
 B= 2480 mm
 C= 968 mm
 D= 1135 mm
 E= 1380 mm
 F= 2175 mm

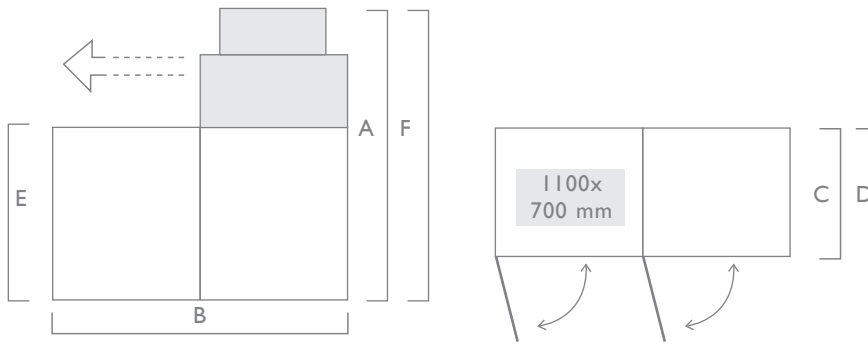

SPECIFICATIONS

CYCLE TIME

35 secs

WEIGHT

Chamber: 1100 kg
 Press unit: 480 kg

MACHINE DIMENSIONS

(H) 2470 mm, (W) 1135 mm, (L) 2480 mm

RECOMMENDED INSTALLATION DIMENSIONS

(H) 2470 mm, (W) 2175 mm, (L) 3680 mm

CHAMBER DIMENSIONS

(H) 1120 mm, (W) 700 mm (L) 1100 mm

BALE SIZE

(W) 1100 mm, (H) 700 mm
 Min Length: 650 mm
 Max Length: 800 mm

HYDRAULIC DATA

Working pressure: 200 bar
 Relief pressure: 230 Bar
 Press force: 20 ton
 Press force per cm²: 2,6 kg/20 ton
 Stroke length: 710 mm

RECOMMENDED OIL: TEMP > 5°C

64l ISO VG 32-68 SAE 10

ELECTRICAL SYSTEM VOLTAGE

3X400 V, 50 Hz, 10 A, IP 55

NOISE LEVEL

< 70 dB (A)

VOLTAGE	FUSE	IP
3 PHASE, 3X400 V, 50 HZ	16A	55

a **phs** Group company

Tel: 0121 565 7426 Fax: 0121 565 7427
 Email: orwaksales@phs.co.uk Website: www.orwak.co.uk
 Orwak Environmental Services Ltd, Unit 6,
 Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ

Printed on recycled paper