


High surface contact area

Galvanized screw shaft
Corrosion resistant

Self-centering shaft
design

Shackle as standard

KITO HOISTS
Always on the safe side

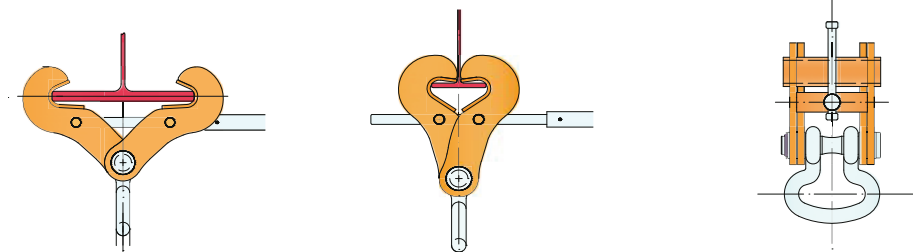

Type	WLL (kg)	Flange width (mm)	Weight (kg)	Headroom (mm)
TK010A	1000	75-230	4,0	207
TK020A	2000	75-230	5,3	205
TK030A	3000	75-230	9,0	254
TK030B	3000	140-320	11,0	284
TK050A	5000	75-230	11,0	265
TK050B	5000	140-320	13,5	283
TK075A	7500	90-320	20,0	328
TK100A	10000	90-320	20,0	328

Reduction in working load limits when side loads applied

Angle measured from the vertical	0°	0°-15°	15°- 30°	30°- 45°
WLL reduction factor in %	0	0	0	0

*The beam clamps can only be used up to an angle of 15° longitudinal to the beam. Is the angle $\geq 15^\circ$ the beam clamp may not be used. For cross-beam applications the beam clamp can be used up to an angle of 45° without reduction to the working load if the beam fulfils the necessary conditions.