

Stella



COMPACT RESILIENT FLOORCOVERING

VINYL



- > Wide colour range
- > Excellent resistance to indentation and abrasion
- > High wear-resistance
- > Easy, low cost maintenance

Stella

Budget solution with premium qualities

Stella is a very competitive compact calendered vinyl flooring **developed for all heavy traffic commercial areas** such as schools, hospitals, stores and shops...

Design and performance have not been compromised in Stella, however. Its very high wear resistance and low-maintenance properties together with its versatile colours will fully meet your needs.

Inviting ambiances

The new Stella designs are inspired by nature: mineral effects fascinate us with their timeless appearance and will create an airy atmosphere with a feeling of freedom and simplicity. The new colours and soothing pattern image can be used individually or in a combination of colours. Stella Woods will bring feelings of comfort and confidence and will allow you to create warm and dynamic atmospheres.

Top performance and low maintenance

The **0.7 mm PVC wear layer** gives very good resistance to indentation, abrasion and tearing.

The surface has a **PUR reinforcement** that allows less cleaning and maintenance -no wax and no polish throughout the flooring's lifetime. Maintenance costs can be reduced by up to 30%. Bearing in mind that 92% of a flooring's total life cycle cost is for maintenance, substantial savings can be made.

Stella also has a **Sanitized® treatment** that protects the floorcovering from premature ageing caused by micro-organisms, and also gives **hygiene** benefits in sensitive areas.







The Stella range

Nature




 3755 001




 3755 002




 3755 003




 3755 004




 3755 005




 3755 006




 3755 007




 3755 008




 3755 009




 3755 010





 3755 011




 3755 012





 3755 013





 3755 014





 3755 015




 3755 016




 3755 017



 3755 018



 3755 019

Woods




Diplomat

 3755 020




Jura

 3755 021



Hêtre fayard

 3755 022




Chêne Robur

 3755 023



Acer Maple

 3755 024




Stella - Pattern repeat and size of the strips				
Art. code	Colour	Size of the strips	Pattern repeat	Reverse sheet
3755 020	Diplomat	from 9 to 12.5 / 100 cm	1x1m	No
3755 021	Jura	14.28 / 100 cm	1x1m	No
3755 022	Hêtre fayard	7.69 / 50 cm	1x1m	No
3755 023	Chêne Robur	7.50 / from 45 to 55 cm	1x1m	No
3755 024	Acer Maple	14.28 / 100 cm	1x1m	No

1

2



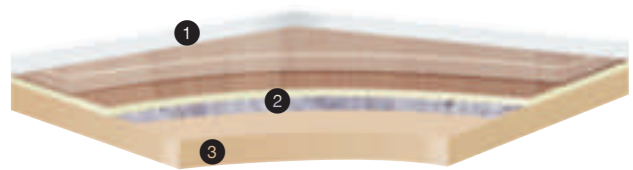


Product construction

- ① **PUR-reinforced wear layer:** very high resistance to abrasion and easy maintenance
- ② **Glass fibre non-woven reinforcement:** excellent dimensional stability
- ③ **Solid homogeneous calendered sheet:** optimum resistance to tearing



Tarkett Environmental Intelligence

We see our Intelligent Flooring Solutions as part of the world's ecological system – and make strong efforts to secure that all our activities are based on respect for the environment. All our flooring products (Vinyl, Linoleum and VisionLine) are developed, produced and handled with a great concern for sustainability and environment. We call it Environmental Intelligence and live by this principle in every single step, from vision to waste.



Stella

DESCRIPTION

Printed compact flexible vinyl floorcovering, with glass fibre reinforcement. Polyurethane reinforced and built-in Sanitized® treatment. In sheet form.
Product standard: EN 649.

Technical data	Standards	Stella
Classification	EN 685 commercial industrial	Classes: 34 43
Total thickness	EN 428	2.00 mm
Wear layer thickness	EN 429	0.70 mm
Total weight	EN 430	2 800 g/m ²
PUR Reinforcement		Yes
Abrasion Group	EN 660-1	Group T: ≤ 0.08 mm
Static indentation	EN 433	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	EN 425	No damage
Dimensional stability	EN 434	< 0.10%
Curl resultant to heat	EN 434	≤ 8 mm
Reaction to fire	EN 13501-1	B _{f1} s1 glued over any A2 _{f1} or A1 _{f1} substrate (concrete) and over any derivate wood substrate
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.3
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R ₁ > 10 ¹⁰ ohms
Impact sound reduction	EN ISO 140-8 EN 717/2	ΔL _w = 4 dB
Reduction of in room impact noise	NF S 31-074	L _{n,e,w} = 75 dB
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN 423	High resistance
Resistance to bacteria	NF EN ISO 846	Sanitized® Grade 0 High fungi effect
Thermal resistance Underfloor heating	EN 12524	0.02 m ² K/W Suitable
Colours		Nature: 19 - Wood: 5
Form of delivery	EN 426	Rolls: 23 lm x 2 m

Art. code	Welding rods	NCS number
3755 001	1291 808	S 3560 Y90R
3755 002	1288 364	S 2050 Y50R
3755 003	1287 249	S 1030 Y20R
3755 004	1287 250	S 3020 G
3755 005	1287 251	S 5020 G
3755 006	1287 252	S 3030 R90B
3755 007	1287 192	S 3020 R90B
3755 008	1287 253	S4020 R90B
3755 009	1292 794	S 6020 R90B
3755 010	1294 727	S 6500 N
3755 011	1291 788	S 5000 N
3755 012	1287 254	S 3502 G
3755 013	1287 255	S 3000 N
3755 014	1287 256	S 1002 Y
3755 015	1291 352	S 2005 Y20R
3755 016	1289 803	S 3010 Y20R
3755 017	1287 257	S 4020 Y30R
3755 018	1287 258	S 4010 Y50R
3755 019	1287 032	S 5020 Y50R
3755 020	1287 259	S 2010 Y40R
3755 021	1292 375	S 3030 Y40R
3755 022	1289 732	S 3020 Y30R
3755 023	1288 382	S 3020 Y20R
3755 024	1287 046	S 2010 Y30R

The above information is subject to modification for the benefit of further improvement (04/07). For more detailed technical information, please contact Tarkett. Follow Tarkett's installation and maintenance instructions carefully. These instructions are available upon request.



TARKETT SALES COMPANIES

www.tarkett-commercial.com

> **Australia:** Tarkett Australia Pty Ltd - Tel. +61 2 96 34 73 73 > **Austria:** Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 > **Baltic States:** Tarkett SAS - Tel. +370 37 262 220 > **Belgium:** S.A. Tarkett NV - Tel. +32 2 520 04 67 > **China:** Tarkett Asia Pacific Limited Shanghai Representative Office - Tel. +86 (21) 62 88 15 38 > **Czech Republic:** Tarkett SAS, org. slozka - Tel. +420-271 001 602 > **Denmark:** Tarkett A/S - Tel. +45 43 90 60 11 > **Finland:** Tarkett Oy - Tel. +358 9 5406 5870 > **France:** Tarkett SAS - Tel. +33 1 41 20 42 49 > **Germany:** Tarkett Holding GmbH, Bereich Objekt - Tel. +49 6233 810 > **Greece:** Tarkett Monoprosopi Ltd - Tel. +30 2 10 576 3889 > **Hong Kong:** Tarkett Asia Pacific Ltd. - Tel. +852 2511 8716 > **Hungary:** Tarkett SAS - Tel. +36 1 437-8150 > **Italy:** Tarkett S.p.A. - Tel. +39 02 893 411 > **Luxembourg:** Tel. +352 949 211 8804 > **Middle East:** Tarkett Middle East - Tel. +961 1 75 2363/4 > **Netherlands:** Tarkett Benelux B.V. - Tel. +31 76 57 80 760 > **Norway:** Tarkett AS - Tel. +47 32 20 92 00 > **Poland:** Tarkett Sp. z o.o. - Tel. +48 22 598 08 81 > **Portugal:** Tarkett SA - Tel. +351 21 427 64 20 > **Russian Federation:** Tarkett Russia - Tel. +7 4 95 777 69 83 > **Slovakia:** Tarkett SAS - Tel. +421 37 6515 404 > **Singapore:** Tarkett Far East - Tel. +65 67 43 53 84 > **South East Europe:** Tarkett Trade d.o.o. - Tel. +381 21 7557 649 • (44) 569 12 21 > **United Kingdom:** Tarkett-Marley Floors Limited - Tel. +44 (0) 1622 854 040 > **Slovakia:** Tarkett SAS - +421 37 6515 404 > **Spain:** Tarkett Floors S.L - Tel. +34 91 358 00 35 > **Sweden:** Tarkett Sverige AB - Tel. +46 771 25 19 00 > **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 043 233 79 24 > **Ukraine:** Tarkett UA - Tel. +380380 (44) 569 12 21 > **North America:** Johnsonite - Tel. +1 440 543 8916 > **Tarkett Inc. USA:** Tel. +1 713 869 5811 > **Tarkett International:** Tel. +49 6233 811 755 - Tel. +33 41 20 41 01