


TWENTY
ALUMINIUM PROFILES




Prosale Limited
Unit 30 The Glenmore Centre
Marconi Drive
Waterwells Business Park
Quedegley, Glos.
GL2 2AP
Tel: 0845 0945 636
www.prosaledoors.co.uk


PRODUCT RANGE

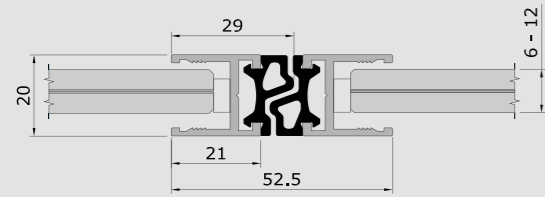


SLIDING LEAVES CENTRAL STOP.

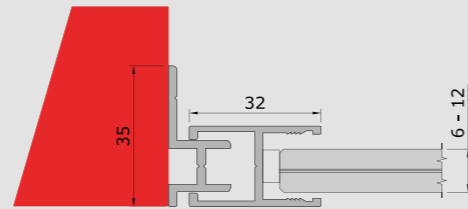

WALL-MOUNTED FIXED LEAF FITTING.

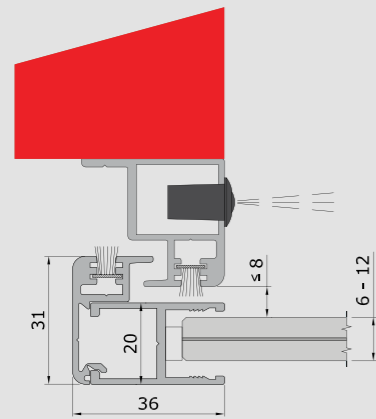

READY FOR WALL-MOUNTED PHOTOCELLS.

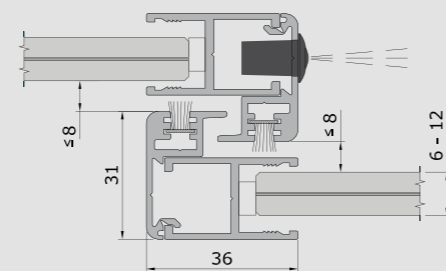

OVERLAP FIXED LEAF AND SLIDE LEAF.

TECHNICAL SPECIFICATIONS

THE VERSATILE AND INNOVATIVE PROFILE FOR SLIDING DOORS

A profile with soft features and reduced dimensions, the best technology has to offer with a modern, sophisticated design.

- Specially designed to create single or multiple-wing doors which are perfectly functional and aesthetically flawless, its delicate linear forms make it suitable for a wide variety of entrances, meeting even the most particular needs.

- This line is at the forefront in offering a high-quality product able to enhance the transparency of the glass and add elegance to any architectural project.

- An innovative product with technical characteristics and high performance together with an essential and elegant design.


- TWENTY is distinguished by its flexibility and simple assembly that reduces and optimizes the work time required; it is versatile and innovative not only in its form but also its substance.

- Specific accessories (seals and brushes) are provided to guarantee the protection and stability of the door frame and thus the automatic sliding door.


The development, testing and production of TWENTY are carried out, as for all SESAMO products, according to the international standard ISO 9001.

Profile section width	20 mm
Glass application method	Insertion to fit Fastening with double seal
Glass thickness	
Heat-strengthened glass:	From 6 to 12 mm
Safety glass:	From 3+3 to 6+6 mm
Type of leaves possible	Fixed Sliding Transom
Complementary accessories	Air seal brushes Seals Floor guides Screws and bolts, etc. for simplified assembly
Safety distances	≤ 8 mm between fixed leaf and sliding leaf



PF17.01 Upright





PF17.02 Leading edge upright




PF17.03 Bottom rail

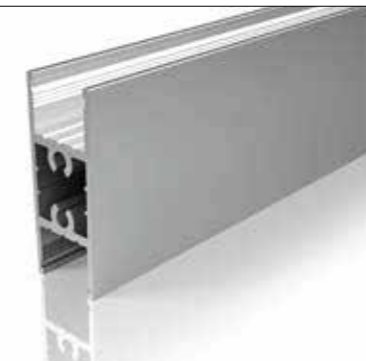


PF17.04 Top rail

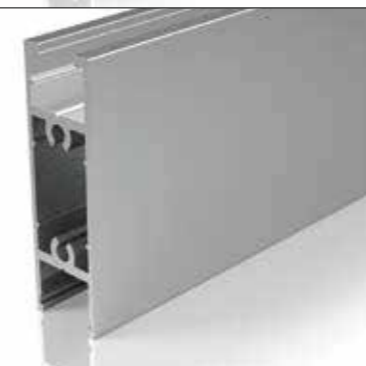


PF17.05 Sliding adapter




PF17.06 Fixed adapter




PF17.07 Fixed L




PF17.08 Photocell door



PF17.09 Interlock section



PF17.10 Guide track



PF17.11 Transom profile

