

DOWNLIGHTS

EDITION FOUR



Downlights



Downlights

Our Downlights range offers versatile, high-performance solutions for residential, commercial, and retail applications. With fire-rated, smart, tilt, and adjustable options, the collection provides energy-efficient, stylish lighting to suit every installation.

Bella 3CCT Fire Rated Downlight	04	Stellar & Stellar Tilt Wattage & 4CCT Fire Rated Downlights	06
Stellar Smart & Smart Tilt Smart Fire Rated Downlight & Tilt Option	10	Stellar Eco 3CCT Contractor 8 Pack Fire Rated Downlight	14
Orbit CCT Ultra-Slim CCT Selectable Circular Downlights	16	Orbit Ultra-Slim Circular Downlights	18
Venus Compact Downlights	20	Shoplight Pro Circular & Rectangular Adjustable Downlights	22
DLSRA Square Adjustable Downlight	24	Ignis & Ignis Plus GU10 Steel/Die-Cast Fire Rated Downlight	26
Hoop & Hoop Plus GU10 Steel/Die-Cast Downlight	30		

BELLA

3CCT FIRE RATED DOWNLIGHT

Bella is a 6W IP65 fire-rated LED downlight with three CCT options: 3000K, 4000K, and 6500K. It's designed for both living spaces and bathrooms, featuring a modern white trim, dimmable, push-fit terminals with loop-in/loop-out capabilities and is Fire rated for both standard timber joist and I-joist ceiling construction. It is a quality, reliable, energy efficient lighting solution.



Features


- Selectable 3CCT - 3000 | 4000 | 6500K
- Fire-rated: I-joist - 30/60/90mins, Solid timber joist - 30mins, Metal Web joist - 30mins
- Acoustic-rated
- Optional interchangeable bezels
- Push-fit terminals with loop-in/loop-out capabilities
- IP65 from the front making it ideal for bathrooms as well as living spaces



Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	3CCT Selectable 3000K 4000K 6500K
CRI	Ra>80
LED Lifetime:	L70B50 30,000 Hours
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 25°C
Beam Angle:	60°
Power Factor	>0.7
Warranty:	3 Years

Dimensions

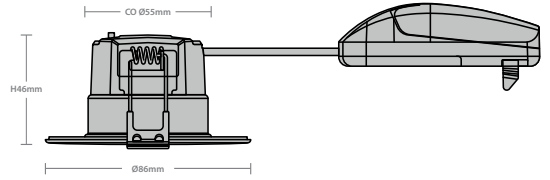

Product Code	Description	Wattage	Lumen Output	Efficacy
BA/W	Bella Fire Rated Downlight 6W 3CCT	6W	660lm	110 lm/W

Bella Accessories

Product Code	Description
BAB/B	Bella Bezel Attachment Black
BAB/C	Bella Bezel Attachment Chrome
BAB/SC	Bella Bezel Attachment Satin Chrome

STELLAR

WATTAGE & 4CCT FIRE RATED DOWNLIGHT


Stellar is an ultra-slim downlight that delivers an extensive list of cutting edge features in one luminaire. Fire rated for both standard timber joist and I-joist ceiling construction, acoustic rated, with selectable wattage & 4CCT colour temperature which can be changed without removing from the ceiling. Stellar also has improved speed terminals and emergency loop. Available with 12 different interchangeable bezels.



Features

- Wattage selectable - 4.5W | 6W
- 4CCT colour selectable - 2700K, 3000K, 4000K & 6000K, operated from below the ceiling
- Fire rated to EN1365-2:2014 / BS476-21:1987 for standard timber and I-joist construction
- Acoustic rating designed to meet ISO10140 - 2 : 2010
- May be safely covered with thermal insulation
- Optional interchangeable bezels
- Tool-free plug & socket connection



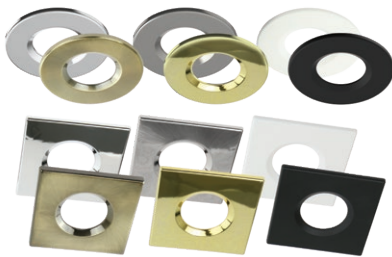

STELLAR BEZEL ATTACHMENTS



TOOL-FREE CONNECTOR AND PLUG & SOCKET




SPEED TERMINALS AND EM LOOP

Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	4CCT Selectable 2700K 3000K 4000K 6000K
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	>0.85
Warranty:	5 Years
Electrical Class:	Class I

Dimensions

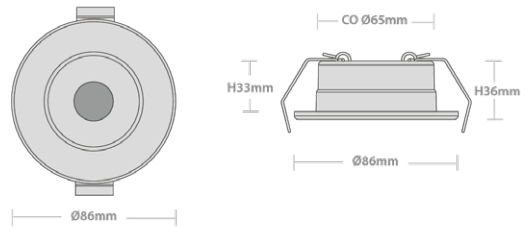

*DATA SHOWN AT 4000K

Product Code	Description	Wattage	Lumen Output	Efficacy
SR/W	Stellar with White Bezel	6W	775 lm*	130 lm/W*

Stellar Accessories

Product Code	Description
SRB/C	Stellar Chrome Bezel Attachment
SRB/SC	Stellar Satin Chrome Bezel Attachment
SRB/B	Stellar Black Bezel Attachment
SRB/AB	Stellar Antique Brass Bezel Attachment
SRB/PB	Stellar Polished Brass Bezel Attachment
SRB/SQW	Stellar Square White Bezel Attachment
SRB/SQC	Stellar Square Chrome Bezel Attachment
SRB/SQSC	Stellar Square Satin Chrome Bezel Attachment
SRB/SQB	Stellar Square Black Bezel Attachment
SRB/SQAB	Stellar Square Antique Brass Bezel Attachment
SRB/SQPB	Stellar Square Polished Brass Bezel Attachment
TITANX/5/KIT/230	Titan X Remote Emergency LiFeP04 230V

SELECTABLE 4CCT SWITCH



SELECTABLE WATTAGE SWITCH



STELLAR TILT

WATTAGE & 4CCT FIRE RATED TILT DOWNLIGHT

Stellar Tilt extends the popular Stellar range, with the addition of tilt adjustment. From highlighting art to washing walls, this fire rated downlight features selectable wattage & 4CCT. The colour temperature can be changed without removing from the ceiling. The Stellar Tilt has a wide range of optional colour finish bezels in round and square format.



Features

- Wattage selectable - 4.5W | 6W
- Elegant 20° tilting inner bezel for directional light
- 4CCT colour selectable - 2700K, 3000K, 4000K & 6000K, operated from below the ceiling
- Fire rated to EN1365-2:2014 / BS476-21:1987 for standard timber and I-joint construction
- Acoustic rating designed to meet ISO10140 - 2 : 2010
- Optional circular and square interchangeable bezels
- Tool-free plug & socket connection



NEW
PRODUCT





STELLAR TILT BEZEL ATTACHMENTS




TOOL-FREE CONNECTOR AND PLUG & SOCKET

Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	4CCT Selectable 2700K 3000K 4000K 6000K
Colour Finish	White RAL9003. Other bezel colours available to separate order
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	0.9
Electrical Class	Class I
Warranty:	5 Years

Dimensions

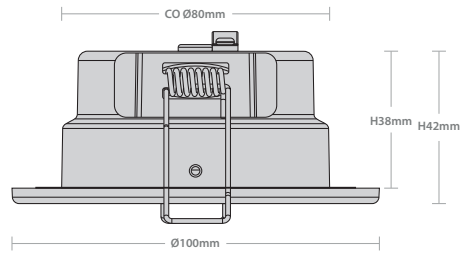

*DATA SHOWN AT 4000K

Product Code	Description	Wattage	Lumen Output	Efficacy
SR/T/W	Stellar Tilt FR Downlight IP65 White 6W 4CCT 2700/3000/4000/6000K	6W	775lm*	130 lm/W*

Stellar Tilt Accessories

Product Code	Description
SRB/T/B	Stellar Tilt Black Bezel Attachment
SRB/T/C	Stellar Tilt Chrome Bezel Attachment
SRB/T/SC	Stellar Tilt Satin Chrome Bezel Attachment
SRB/T/PB	Stellar Tilt Polished Brass Bezel Attachment
SRB/T/SQW	Stellar Tilt Square White Bezel Attachment
SRB/T/SQB	Stellar Tilt Square Black Bezel Attachment
SRB/T/SQC	Stellar Tilt Square Chrome Bezel Attachment
SRB/T/SQSC	Stellar Tilt Square Satin Chrome Bezel Attachment
SRB/T/SQPB	Stellar Tilt Square Polished Brass Bezel Attachment
TITANX/5/KIT/230	Titan X Remote Emergency LiFeP04 230V

SELECTABLE 4CCT SWITCH



SELECTABLE WATTAGE SWITCH



STELLAR SMART

SMART CONTROLLED FIRE RATED DOWNLIGHT


Stellar Smart is the latest generation of Smart Home fire rated downlights. The smartphone app allows any colour temperature to be selected from 2000K to 6500K and light levels fully dimmable. You can also group fittings, choose or create scene sets manually or to time schedules. A wide range of optional colour finish bezels are available in round and square format.



Features

- Smart Home App control for versatile lighting
- Group fittings and set scenes to suit time of day or mood
- Operates on Bluetooth or Wi-Fi
- Fire rated to EN1365-2:2014 / BS476-21:1987 for standard timber and I-joist construction
- Optional round and square interchangeable bezels
- Fast push fit terminal connections



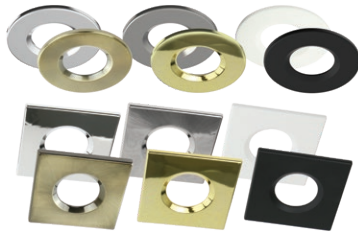

STELLAR BEZEL ATTACHMENTS




TOOL-FREE CONNECTOR AND PLUG & SOCKET

Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	Fully variable 2000K - 6500K
Colour Finish	White RAL9003. Other bezel colour finishes to separate order
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	>0.8
Electrical Class	Class II
Warranty:	5 Years

Dimensions

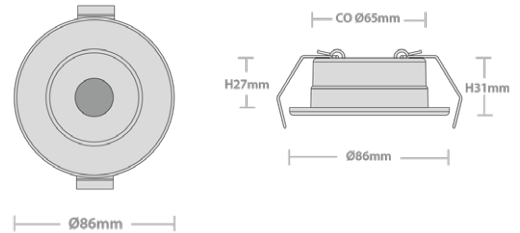

Stellar Smart Accessories

Product Code	Description	Wattage	Lumen Output	Efficacy
SSM/W	Stellar Smart with Round White Bezel	6W	430 lm @ 2000K 510 lm @ 6500K	70-80 lm/W
SRB/B	Stellar Round Black Bezel Attachment	-	-	-
SRB/C	Stellar Round Chrome Bezel Attachment	-	-	-
SRB/SC	Stellar Round Satin Chrome Bezel Attachment	-	-	-
SRB/AB	Stellar Antique Brass Bezel Attachment	-	-	-
SRB/PB	Stellar Round Polished Brass Bezel Attachment	-	-	-
SRB/SQW	Stellar Square White Bezel Attachment	-	-	-
SRB/SQB	Stellar Square Black Bezel Attachment	-	-	-
SRB/SQC	Stellar Square Chrome Bezel Attachment	-	-	-
SRB/SQSC	Stellar Square Satin Chrome Bezel Attachment	-	-	-
SRB/SQAB	Stellar Square Antique Brass Bezel Attachment	-	-	-
SRB/SQPB	Stellar Square Polished Brass Bezel Attachment	-	-	-

STELLAR SMART TILT

SMART CONTROLLED FIRE RATED TILT DOWNLIGHT

Stellar Smart Tilt allows any colour temperature to be selected from 2000K to 6500K and light levels are fully dimmable, all using a smartphone app. Mood changing scenes can also be set in the app, along with fitting groups and timed schedules. All with tilting, directional control of the light. A wide range of optional colour finish bezels are available in round and square format.



Features

- Smart phone control of dimming, colour appearance, groups and scene settings
- Easy to operate via Bluetooth or Wi-Fi network
- Fire rated to EN1365-2:2014 / BS476-21:1987 for standard timber and I-joist construction
- Adjustable tilt to control direction of light
- Optional round and square interchangeable bezels
- Fast push fit terminal connections





STELLAR SMART TILT BEZEL ATTACHMENTS




TOOL-FREE CONNECTOR AND PLUG & SOCKET

Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	Fully variable 2000K - 6500K
Colour Finish	White RAL9003. Other bezel colours available to separate order
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	>0.8
Electrical Class	Class II
Warranty:	5 Years

Dimensions

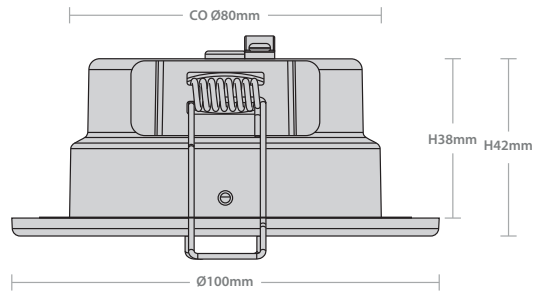

Stellar Smart Tilt Accessories

Product Code	Description	Wattage	Lumen Output	Efficacy
SSM/T/W	Stellar Tilt Smart with Round White Bezel	6W	430 lm @ 2000K 510 lm @ 6500K	70-80 lm/W
SRB/T/B	Stellar Tilt Round Black Bezel Attachment	-	-	-
SRB/T/C	Stellar Tilt Round Chrome Bezel Attachment	-	-	-
SRB/T/SC	Stellar Tilt Round Satin Chrome Bezel Attachment	-	-	-
SRB/T/PB	Stellar Tilt Round Polished Brass Bezel Attachment	-	-	-
SRB/T/SQW	Stellar Tilt Square White Bezel Attachment	-	-	-
SRB/T/SQB	Stellar Tilt Square Black Bezel Attachment	-	-	-
SRB/T/SQC	Stellar Tilt Square Chrome Bezel Attachment	-	-	-
SRB/T/SQSC	Stellar Tilt Square Satin Chrome Bezel Attachment	-	-	-
SRB/T/SQPB	Stellar Tilt Square Polished Brass Bezel Attachment	-	-	-

STELLAR ECO

3CCT CONTRACTOR 8 PACK FIRE RATED DOWNLIGHT

Stellar ECO uses the same ultra-slim downlight housing as Stellar, Fire rated for both standard timber joist and I-joist ceiling construction. Stellar ECO offers efficacy of 125lm/w, selectable 3CCT from below the ceiling, fast fix connectors and fits the same coloured bezels as Stellar, suitable for a wide variety of applications.



Features

- Contractor 8 Pack
- Selectable CCT 3000K, 4000K, 6000K
- Fire rated to EN1365-2:2014 / BS476-21:1987
- Acoustic rating to ISO10140 - 2 : 2010
- Works with Stellar Interchangeable bezels






TOOL-FREE CONNECTOR AND PLUG & SOCKET

Specification

Material:	Housing: Steel Bezel: Polycarbonate
Colour Temperature:	3CCT Selectable 3000K 4000K 6000K
CRI	Ra>80
LED Lifetime:	L70B50 30,000 Hrs
IP Rating:	IP65 (From below ceiling)
Working Temperature:	-20°C to 40°C
Beam Angle:	40°
Power Factor	0.7
Warranty:	3 Years

Dimensions

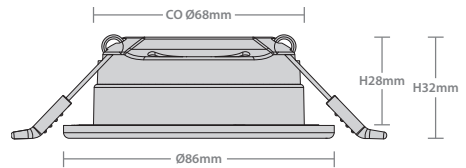


*DATA SHOWN AT 4000K

Product Code	Description	Wattage	Lumen Output	Efficacy
SR/ECO/8/W	Stellar ECO 8 Pack Fire Rated Downlight 6W 3CCT	6W	750 lm*	125 lm/W*

Stellar Eco Accessories

Product Code	Description
SRB/C	Stellar Chrome Bezel Attachment
SRB/SC	Stellar Satin Chrome Bezel Attachment
SRB/B	Stellar Black Bezel Attachment
SRB/AB	Stellar Antique Brass Bezel Attachment
SRB/PB	Stellar Polished Brass Bezel Attachment
SRB/SQW	Stellar Square White Bezel Attachment
SRB/SQC	Stellar Square Chrome Bezel Attachment
SRB/SQSC	Stellar Square Satin Chrome Bezel Attachment
SRB/SQB	Stellar Square Black Bezel Attachment
SRB/SQAB	Stellar Square Antique Brass Bezel Attachment
SRB/SQPB	Stellar Square Polished Brass Bezel Attachment

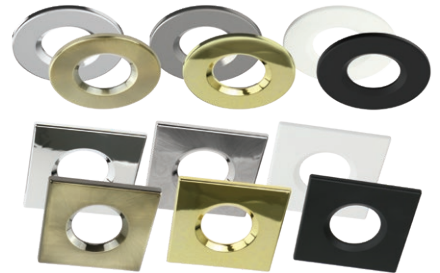

STELLAR BEZEL ATTACHMENTS



ORBIT CCT

ULTRA-SLIM CCT SELECTABLE CIRCULAR DOWNLIGHTS

Orbit CCT recessed die cast aluminium circular downlights are available in outputs from 500lm to 1720lm with selectable colour temperatures 3000K / 4000K / 6000K. Featuring an ultra-slim profile of 15mm, Orbit is highly suited to projects where cost is a prime consideration.



**ULTRA
SLIM**

Features


- Ultra slim profile to fit virtually any ceiling void
- Selectable CCT - 3000K, 4000K, 6000K
- Emergency option available using ORB/EM/PLUGKIT
- Die-cast aluminium body and TP(b) diffuser
- Supplied c/w pre-wired remote driver with plug and socket connectors



Specification

Material:	Bezel: Die-Cast Aluminium Diffuser: TP(b) rated PS
Colour Temperature:	3000K 4000K 6000K
CRI	Ra>80
LED Lifetime:	L70B50 97,000 Hrs
IP Rating:	IP44 (from below ceiling)
IK Rating:	IK04
Working Temperature:	-10°C to 50°C
Power Factor	>0.9
Warranty:	3 Years

Dimensions

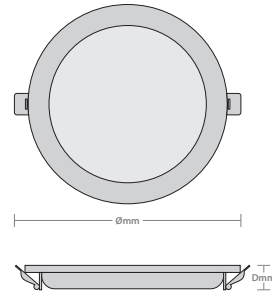

Product Code	Dimensions	Cut Out
ORB6	Ø: 120mm, D: 15mm	106 mm
ORB12	Ø: 170mm, D: 15mm	155 mm
ORB15	Ø: 170mm, D: 15mm	155 mm
ORB18	Ø: 220mm, D: 15mm	205 mm
ORB20	Ø: 220mm, D: 15mm	205 mm

Product Code	Description	Wattage	Lumen Output	Colour Temperature	Efficacy
ORB6-CCT	Orbit Circular Downlight 6W 3CCT 3/4/6K	6W	500 lm	3000K 4000K 6000K	83 lm/W
ORB12-CCT	Orbit Circular Downlight 12W 3CCT 3/4/6K	12W	900 lm	3000K 4000K 6000K	75 lm/W
ORB15-CCT	Orbit Circular Downlight 15W 3CCT 3/4/6K	15W	1020 lm	3000K 4000K 6000K	68 lm/W
ORB18-CCT	Orbit Circular Downlight 18W 3CCT 3/4/6K	18W	1550 lm	3000K 4000K 6000K	86 lm/W
ORB20-CCT	Orbit Circular Downlight 20W 3CCT 3/4/6K	20W	1720 lm	3000K 4000K 6000K	86 lm/W

Orbit CCT Accessories

Product Code	Description	Wattage
ORB6CCT-DVR	Orbit None Dimmable Driver for ORB6-CCT	6W
ORB12CCT-DVR	Orbit None Dimmable Driver for ORB12-CCT	12W
ORB15CCT-DRV	Orbit None Dimmable Driver for ORB15-CCT	15W
ORB18CCT-DRV	Orbit None Dimmable Driver for ORB18-CCT	18W
ORB20CCT-DRV	Orbit None Dimmable Driver for ORB20-CCT	20W
ORB/EM/PLUGKIT	Orbit Emergency Conversion Cable	-
TITANX/4/KIT	Titan X Remote Emergency LiFeP04	
TITANX/4/KIT/ST	Titan X Remote Emergency LiFeP04 Self Test	

ORBIT

ULTRA-SLIM CIRCULAR DOWNLIGHTS

Orbit recessed circular downlights are available in outputs from 450lm to 1600lm and in three different colour temperatures. Featuring an ultra-slim profile, Orbit is highly suited to projects where cost is a prime consideration.



**ULTRA
SLIM**

Features


- Ultra slim profile to fit virtually any ceiling void
- Wide range of outputs and colour temperature options
- Emergency option available
- Die-cast aluminium body and TP(b) diffuser
- Supplied c/w pre wired remote driver with plug and socket connectors
- Dimmable drivers available to order separately



Specification

Material:	Bezel: Die-Cast Aluminium Diffuser: TP(b) rated PS
Colour Temperature:	3000K 4000K 6000K
CRI	Ra>80
LED Lifetime:	L70B50 30,000 Hrs
IP Rating:	IP44 (from below ceiling)
IK Rating:	IK04
Working Temperature:	-10°C to 50°C
Power Factor	0.9
Warranty:	3 Years

Dimensions

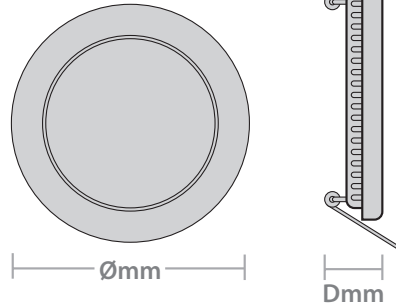

Product Code	Dimensions	Cut Out
ORB6	Ø: 120mm, D: 30mm	108 mm
ORB12	Ø: 170mm, D: 34mm	157 mm
ORB15	Ø: 200mm, D: 34mm	180 mm
ORB18	Ø: 225mm, D: 34mm	205 mm
ORB20	Ø: 240mm, D: 35mm	220 mm

Product Code	Description	Wattage	Lumen Output	Colour Temperature	Efficacy
ORB6-30	Orbit Circular Downlight	6W	450 lm	3000K	75 lm/W
ORB6-40	Orbit Circular Downlight	6W	450 lm	4000K	75 lm/W
ORB12-30	Orbit Circular Downlight	12W	900 lm	3000K	75 lm/W
ORB15-60	Orbit Circular Downlight	15W	1125 lm	6000K	75 lm/W
ORB18-40	Orbit Circular Downlight	18W	1440 lm	4000K	80 lm/W

Orbit Accessories

Product Code	Description	Wattage
ORB6D-DVR	Orbit Phase Cut Dimmable Driver for ORB6	6W
ORB12D-DVR	Orbit Phase Cut Dimmable Driver for ORB12	12W
ORB15D-DVR	Orbit Phase Cut Dimmable Driver for ORB15	15W
ORB18D-DVR	Orbit Phase Cut Dimmable Driver for ORB18	18W
ORB20D-DVR	Orbit Phase Cut Dimmable Driver for ORB20	20W

Product Code	Description	Emergency Battery Type
TITANX/4/KIT	Titan X remote Emergency 4W	LiFeP04
TITANX/4/KIT/ST	Titan X remote Emergency 4W Self Test	LiFeP04

VENUS

COMPACT DOWNLIGHTS

Venus is a new range of compact commercial downlights, designed as the perfect retrofit solution to compact fluorescent installations. The die-cast aluminium range features adjustable fixing brackets and optional floating glass attachments.



Features

- High quality, die-cast aluminium construction
- 1000, 2000, 3000 lumen output options
- 150, 170 & 200mm cut outs, ideal for PL downlight retrofit
- Optional floating glass attachment
- Ceiling brackets adjust from below






Specification

Material:	Body: Die-Cast Aluminium Diffuser: PMMA
Colour Temperature:	4000K
CRI	Ra>80
LED Lifetime:	L80B50 50,000 Hrs
IP Rating:	IP54 (From below ceiling)
Working Temperature:	-20°C to 40°C
Power Factor	0.9
Warranty:	5 Years

Dimensions

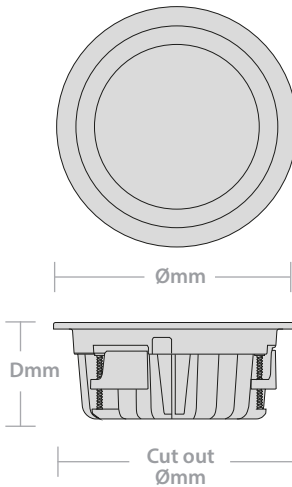

Product Code	Dimensions	Cut Out
VEN150	Ø: 175mm, D:70mm	Ø: 150 mm
VEN170	Ø: 195mm, D:78mm	Ø: 170 mm
VEN200	Ø: 230mm, D:86mm	Ø: 200 mm

Product Code	Description	Wattage	Lumen Output	Efficacy
VEN150/1-40	Venus Downlight 150mm c/o	11W	1100 lm	100 lm/W
VEN170/2-40	Venus Downlight 170mm c/o	18W	2000 lm	110 lm/W
VEN200/2-40	Venus Downlight 200mm c/o	18W	2000 lm	110 lm/W
VEN200/3-40	Venus Downlight 200mm c/o	29W	3200 lm	110 lm/W

Venus Accessories

Product Code	Description	Product Code	Description	Battery Type
VEN150/FG	Floating Glass Attachment for VEN150	TITANX/4/KIT	Titan X remote Emergency 4W	LiFeP04
VEN170/FG	Floating Glass Attachment for VEN170	TITANX/4/KIT/ST	Titan X remote Emergency 4W Self Test	LiFeP04
VEN200/FG	Floating Glass Attachment for VEN200			

SHOPLIGHT PRO

CIRCULAR & RECTANGULAR ADJUSTABLE DOWNLIGHTS

The Shoplight Pro range of adjustable downlights now offers improved efficiency and the benefit of superior Ra90+ colour rendition, ideal for retail application. Designed for distinctive feature lighting, particularly wall displays or architectural features.




Features

- Now with superior Ra90+ colour rendering
- High quality die-cast construction
- Ideal for feature lighting and wall washing, particularly in retail applications
- Wide adjustment range to assist creative designs
- Improved efficacy up to 98lm/w



SLPC33-940

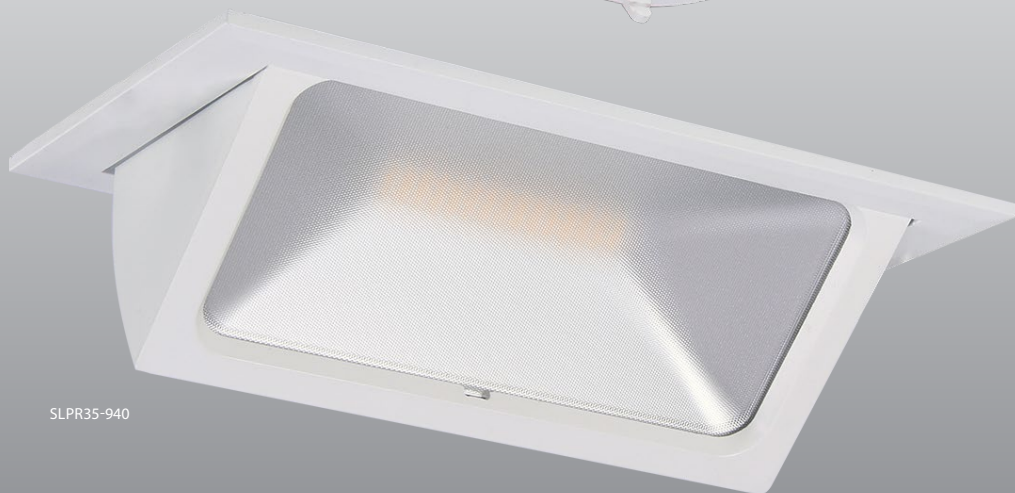


SLPR35-940



Specification

Material:	Die-Cast Aluminium
Colour Temperature:	4000K
Colour Finish	White
CRI	Ra>90
LED Lifetime:	L80B50 > 50,000 Hrs
IP Rating:	IP20
Working Temperature:	-20°C to 40°C
Beam Angle	Circular: 60° Rectangular: 100°
Adjustability	Circular: 45° tilt, 350° rotation Rectangular: 45° tilt
Power Factor	>0.95
Electrical Class	Class II
Warranty:	5 Years

Dimensions

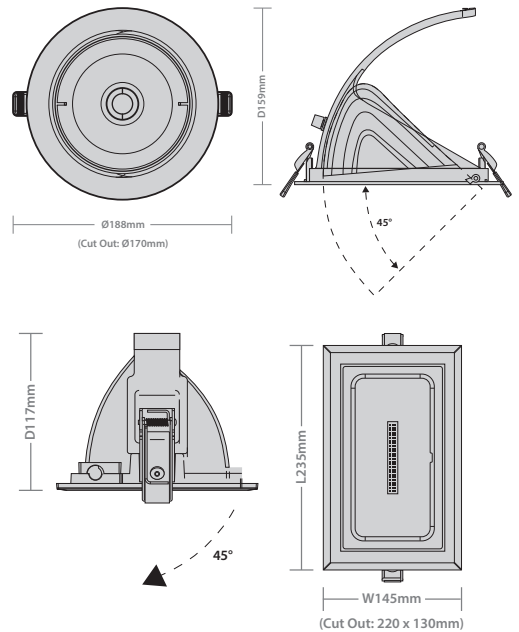

Product Code	Description	Wattage	Lumen Output	Colour Temperature	Efficacy
SLPC33-940	Shoplight Pro Circular	33W	3250 lm	4000K	98 lm/W
SLPR35-940	Shoplight Pro Rectangular	35W	3000 lm	4000K	90 lm/W

Shoplight Pro Accessories

Product Code	Description	Emergency Battery Type
TITANX/4/KIT	Titan X remote Emergency 4W	LiFeP04
TITANX/4/KIT/ST	Titan X remote Emergency 4W Self Test	LiFeP04

DLSRA

SQUARE ADJUSTABLE DOWNLIGHT

DLSRA is a highly versatile range of recessed downlights, suitable for both retail and commercial applications. This square downlight has fixing brackets to allow units to be connected, creating attractive, bespoke display lighting.



Features

- High quality die-cast construction
- Easy to adjust tilt and rotation
- Unique fixing brackets to connect groups of fittings
- Create bespoke linear and grid configurations







Specification

Material:	Die-Cast Aluminium
Colour Temperature:	4000K
CRI	Ra>80
LED Lifetime:	L80B50 50,000 Hrs
IP Rating:	IP40
Working Temperature:	-20°C to 65°C
Beam Angle:	45°
Power Factor	>0.9
Warranty:	3 Years

Dimensions

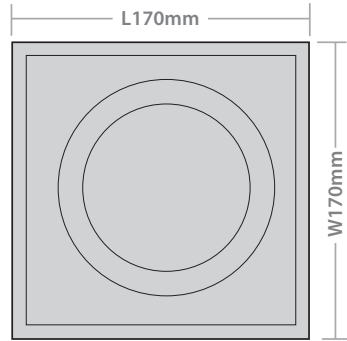

Cut out: 150 x 150mm



Product Code	Description	Wattage	Lumen Output	Efficacy
COBDLSRA30W-40	Square Adjustable Downlight	30W	2900 lm	97 lm/W

DLSRA Accessories

Product Code	Description	Emergency Battery Type
TITANX/4/KIT	Titan X remote Emergency 4W	LiFeP04
TITANX/4/KIT/ST	Titan X remote Emergency 4W Self Test	LiFeP04

IGNIS PLUS

GU10 DIE-CAST FIRE RATED DOWNLIGHT

Ignis Plus is a range of high quality, fire rated die-cast aluminium downlights. Designed for use with GU10 lamps, the range is available as Fixed, Tilt and IP65 options and features an innovative fast-fit, tool-less terminal block.



Features

- Fire rated for 30, 60 & 90 minutes to BS 476:20:1987 & BS476:21:1987
- Acoustic rating: ISO 10140-2:2010
- IP65, Fixed & Tilt options available
- White, chrome, satin chrome and brass finish
- Includes terminal block with heavy duty loop-in / loop-out lever terminals
- Recommended for use with Red Arrow GU10 Glass & Plastic LED lamps (order separately)






Brass Finish IP65




Chrome Finish Tilt



Specification

Material:	Bezel: Die-Cast Aluminium Housing: Steel
IP Rating:	IP20 / IP65 (IP65 from below ceiling)
Warranty:	1 Year

Dimensions

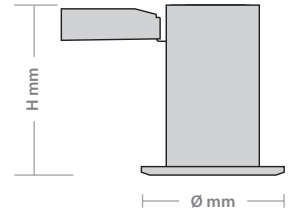

Product	Dimensions	Cut Out
Fixed	H: 95mm, Ø: 86mm	Ø75mm
Tilt	H: 95mm, Ø: 100mm	Ø90mm
IP65	H: 105mm, Ø: 86mm	Ø75mm

Product Code	Description	Colour Finish	IP Rating
IGP/FW	Ignis Plus Fixed	White	IP20
IGP/FC	Ignis Plus Fixed	Chrome	IP20
IGP/FSC	Ignis Plus Fixed	Satin Chrome	IP20
IGP/FB	Ignis Plus Fixed	Brass	IP20
IGP/TW	Ignis Plus Tilt	White	IP20
IGP/TC	Ignis Plus Tilt	Chrome	IP20
IGP/TSC	Ignis Plus Tilt	Satin Chrome	IP20
IGP/TB	Ignis Plus Tilt	Brass	IP20
IGP/65W	Ignis Plus IP65	White	IP65
IGP/65C	Ignis Plus IP65	Chrome	IP65
IGP/65SC	Ignis Plus IP65	Satin Chrome	IP65
IGP/65B	Ignis Plus IP65	Brass	IP65



SEE LIGHTING ACCESSORIES FOR OUR EXTENSIVE RANGE OF COMPATIBLE GU10 GLASS & PLASTIC LAMPS

IGNIS


GU10 STEEL FIRE RATED DOWNLIGHT

Offering excellent value for money, Ignis is a range of fire rated downlights with steel bezels. Designed for use with GU10 lamps, as Fixed and Tilt option in 4 finishes. All feature Red Arrow's innovative terminal block.



Features

- Fire rated for 30, 60 & 90 minutes to BS 476:20:1987 & BS476:21:1987
- Acoustic rating: ISO 10140-2:2010
- Fixed & Tilt options available
- White, chrome, satin chrome and brass finish
- Includes fast-fit terminal block with heavy duty loop-in / loop-out lever terminals
- Recommended for use with Red Arrow GU10 Glass & Plastic LED lamps (order separately)

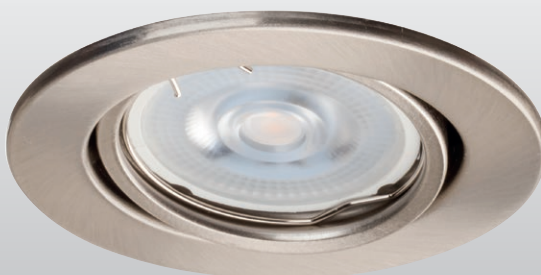



Chrome Finish Fixed




White Finish Tilt



Specification

Material:	Bezel & Housing: Steel
IP Rating:	IP20
Warranty:	1 Year

Dimensions

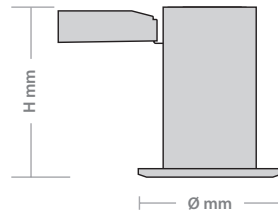

Product	Dimensions	Cut Out
Fixed	H: 85mm, Ø: 85mm	Ø65mm
Tilt	H: 95mm, Ø: 87mm	Ø75mm

Product Code	Description	Colour Finish	IP Rating
IGS/FW	Ignis Fixed	White	IP20
IGS/FC	Ignis Fixed	Chrome	IP20
IGS/FSC	Ignis Fixed	Satin Chrome	IP20
IGS/FB	Ignis Fixed	Brass	IP20
IGS/TW	Ignis Tilt	White	IP20
IGS/TC	Ignis Tilt	Chrome	IP20
IGS/TSC	Ignis Tilt	Satin Chrome	IP20
IGS/TB	Ignis Tilt	Brass	IP20



SEE LIGHTING ACCESSORIES FOR OUR EXTENSIVE RANGE OF COMPATIBLE GU10 GLASS & PLASTIC LAMPS

HOOP PLUS

GU10 DIE-CAST DOWNLIGHT

Hoop Plus offers the elegance of die-cast aluminium bezels and excellent value for money. Designed for use with GU10 lamps and available in 3 bezel formats and 4 colour finishes.



Features

- Sleek die-cast aluminium bezel
- Supplied with pre wired lamp holder and terminal block mounting bracket
- Recommended for use with Red Arrow GU10 Glass & Plastic LED lamps (order separately)
- IP65, Fixed & Tilt options available
- Choice of white, chrome, satin chrome and brass finish





Brass Finish Fixed



Satin Chrome Finish IP65




White Finish Tilt

Specification

Material:	Bezel: Die-Cast Aluminium
IP Rating:	IP20 / IP65 (IP65 from below ceiling)
Warranty:	1 Year

Dimensions

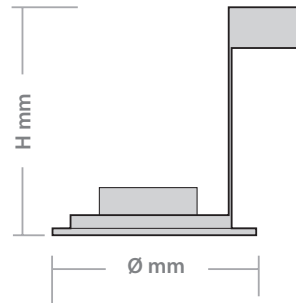

Product	Dimensions	Cut Out
Fixed	H: 95mm, Ø: 80mm	Ø70mm
Tilt	H: 105mm, Ø: 95mm	Ø79mm
IP65	H: 105mm, Ø: 85mm	Ø66mm

Product Code	Description	Colour Finish	IP Rating
HP/FW	Hoop Plus Fixed	White	IP20
HP/FC	Hoop Plus Fixed	Chrome	IP20
HP/FSC	Hoop Plus Fixed	Satin Chrome	IP20
HP/FB	Hoop Plus Fixed	Brass	IP20
HP/TW	Hoop Plus Tilt	White	IP20
HP/TC	Hoop Plus Tilt	Chrome	IP20
HP/TSC	Hoop Plus Tilt	Satin Chrome	IP20
HP/TB	Hoop Plus Tilt	Brass	IP20
HP/65W	Hoop Plus IP65	White	IP65
HP/65C	Hoop Plus IP65	Chrome	IP65
HP/65SC	Hoop Plus IP65	Satin Chrome	IP65
HP/65B	Hoop Plus IP65	Brass	IP65



SEE LIGHTING ACCESSORIES FOR OUR EXTENSIVE RANGE OF COMPATIBLE GU10 GLASS & PLASTIC LAMPS

HOOP


GU10 STEEL DOWNLIGHT

Hoop delivers outstanding value for money for a GU10 downlight. Featuring steel bezels and available in Fixed and Tilt options in 4 colour finishes.



Features

- Value for money GU10 downlight
- Fixed & Tilt options available
- Choice of white, chrome, satin chrome and brass finish
- Supplied with pre wired lamp holder and terminal block mounting bracket
- Recommended for use with Red Arrow GU10 Glass & Plastic LED lamps (order separately)

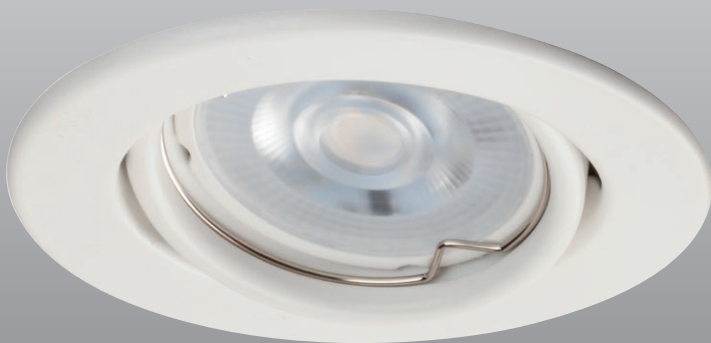



Satin Chrome Finish Tilt



Brass Finish Fixed




Satin Chrome Finish Fixed

Specification

Material:	Bezel: Steel
IP Rating:	IP20
Warranty:	1 Year

Dimensions

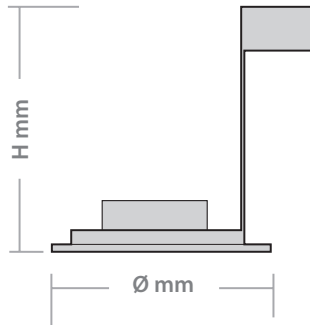


Product	Dimensions	Cut Out
Fixed	H: 100mm, Ø: 80mm	Ø57mm
Tilt	H: 95mm, Ø: 88mm	Ø67mm

Product Code	Description	Colour Finish	IP Rating
HS/FW	Hoop Fixed	White	IP20
HS/FC	Hoop Fixed	Chrome	IP20
HS/FSC	Hoop Fixed	Satin Chrome	IP20
HS/FB	Hoop Fixed	Brass	IP20
HS/TW	Hoop Tilt	White	IP20
HS/TC	Hoop Tilt	Chrome	IP20
HS/TSC	Hoop Tilt	Satin Chrome	IP20
HS/TB	Hoop Tilt	Brass	IP20



SEE LIGHTING ACCESSORIES FOR OUR EXTENSIVE RANGE OF COMPATIBLE GU10 GLASS & PLASTIC LAMPS

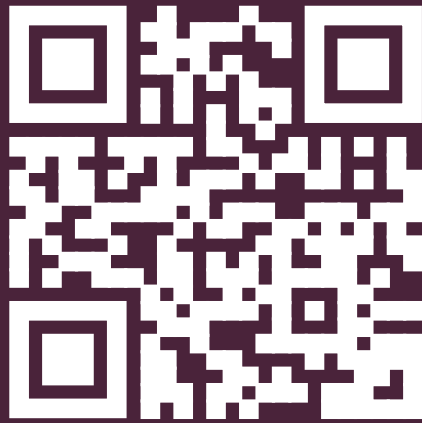

UP TO £1,000 OFF*

Red Arrow Electrical Ltd,
Cortonwood Drive, Brampton,
Barnsley, S73 0UF.

Call us 0114 279 8999
sales@redarrowelectrical.co.uk

*Terms & Conditions – Save up to £1,000 on an
online order

