GAFFLOW RESIN SYSTEMS



PRIMERS

SUB-BASE COAT

The SUB-BASE Coat is a two-component, epoxy primer with good penetrating properties for use on concrete and polymer modified cementitious screeds. SUB-BASE Coat is 100% solids, low viscosity Primer.

DPM PRIMER COAT

DPM Coat is a two-component epoxy primer where damp-proofing is essential for use on concrete and polymer modified cementitious screeds to enhance adhesion.

VAND-GUARD PRIMER

Water based epoxy resin, compatible with most surfaces, and the resulting polymerized product is a crystalline material. It effectively blocks residual moisture flow and prevent blistering of the polyurethane coating applied on top.

THE BIG BASE

EPOXY BASE COAT

The BIG BASE is a two-component 100% solids epoxy flooring system offering excellent build up and levelling properties. Developed, formulated and designed as a base coat for the Gafflow Resin Metallic Epoxy System.

Available in:

BLACK WHITE

*MORE COLOURS AVAILABLE APON REQUEST**

THE MONEY COAT

The Money Coat Epoxy is a top-quality, two-component, clear epoxy with low viscosity that offers superior performance against UV exposure. Specifically designed for the Gafflow Resin Metallic Epoxy System, it is versatile and ideal for a wide range of applications, including light-colored floors, countertops, worktops, penny floors, and more. The possibilities for its use are limitless.

Decorative epoxy is commonly utilized to create a sleek, shiny surface with vibrant colors or intricate designs. To achieve the desired metallic effect, various application techniques such as swirling, marbling, or layering are employed. These methods can enhance the richness and complexity of the metallic appearance.

TOP COAT

G-2000

A Spray-on Top Coat, leads the way in advanced surface protection. This clear coat, based on sol-gel technology, aims to set new benchmarks by offering exceptional durability and protection. This innovative sol-gel solution simplifies your coating procedure by eliminating the requirement for grinding or sanding substrates.

Available in: Gloss and Satin

MATTE PU TOP COAT

Matt Pu is a water-based, high-performance aliphatic polyurethane resin designed as a top coat with a matte finish. It cures to create durable and flexible floor coatings with excellent abrasion resistance, offering protection for frequently used floors. This material does not Amber/Yellow over time when exposed to sunlight.

PRIMERS

SUB-BASE COAT

The SUB-BASE Coat is a two-component, epoxy primer with good penetrating properties for use on concrete and polymer modified cementitious screeds. SUB-BASE Coat is 100% solids, low viscosity Primer.

KIT SIZE	6KG	15KG
PRICE	£	£





DPM PRIMER COAT

DPM Coat is a two-component epoxy primer where damp-proofing is essential for use on concrete and polymer modified cementitious screeds to enhance adhesion.

KIT SIZE	15KG
PRICE	£

VAND-GUARD PRIMER

Water based epoxy resin, compatible with most surfaces, and the resulting polymerized product is a crystalline material. It effectively blocks residual moisture flow and prevent blistering of the polyurethane coating applied on top.

KIT SIZE	5KG	10KG
PRICE	£	£



BASE COAT

THE BIG BASE

The BIG BASE is a two-component 100% solids epoxy flooring system offering excellent build up and levelling properties. Developed, formulated and designed as a base coat for the Gafflow Resin Metallic Epoxy System.

KIT SIZE	6KG	15KG
PRICE	£	£

Available in:

BLACK WHITE

*MORE COLOURS AVAILABLE APON REQUEST**





GAFFLOW RESIN SYSTEMS

12 Birch Rd, Birch Industrial Estate, Eastbourne, BN23 6PH

01323-

info@GafflowResinSystems.com

GafflowResinSystems.com

THE MONEY COAT







Features & Benefits

- Nonylphenol-free.
- 100% Solid.
- Easy application.
- Excellent UV resistance.
- Clear transparency and Gloss Finish.
- Self levelling.
- Easy release of trapped air bubbles.
- High chemical resistance.

Product Application

The Money Coat Epoxy is a superior premium self-levelling resin, meaning it naturally flows and spreads out to create a level surface. For best results apply a continuous thick application recommended at 1kg/m2, the thickness will help achieve visual effects more effectively.
Once applied, metallic decorative resins are typically sealed with a clear topcoat to protect the finish and enhance its durability.

The Money Coat Epoxy is a top-quality, two-component, clear epoxy with low viscosity that offers superior performance against UV exposure. Specifically designed for the Gafflow Resin Metallic Epoxy System, it is versatile and ideal for a wide range of applications, including light-colored floors, countertops, worktops, penny floors, and more. The possibilities for its use are limitless.

Decorative epoxy is commonly utilized to create a sleek, shiny surface with vibrant colors or intricate designs. To achieve the desired metallic effect, various application techniques such as swirling, marbling, or layering are employed. These methods can enhance the richness and complexity of the metallic appearance.

KIT SIZE	6KG	15KG
PRICE	£	£

GAFFLOW RESIN SYSTEMS

12 Birch Rd, Birch Industrial Estate, Eastbourne, BN23 6PH

01323-

info@GafflowResinSystems.com

GafflowResinSystems.com

The Top Coats

G-2000

A Spray-on Top Coat, leads the way in advanced surface protection. This clear coat, based on sol-gel technology, aims to set new benchmarks by offering exceptional durability and protection. This innovative sol-gel solution simplifies your coating procedure by eliminating the requirement for grinding or sanding substrates.

Available in:

SATIN  GLOSS 

KIT SIZE	6KG	15KG
PRICE	£	£



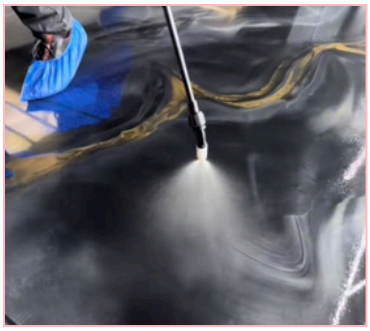

MATTE PU TOP COAT

Matte Pu is a water-based, high-performance aliphatic polyurethane resin designed as a top coat with a matte finish. It cures to create durable and flexible floor coatings with excellent abrasion resistance, offering protection for frequently used floors. This material does not Amber/Yellow over time when exposed to sunlight.

Available in:

MATTE 

KIT SIZE	6KG	15KG
PRICE	£	£





GAFFLOW RESIN SYSTEMS

12 Birch Rd, Birch Industrial Estate, Eastbourne, BN23 6PH

01323-

info@GafflowResinSystems.com

GafflowResinSystems.com

QUICK PRODUCT INSTALLATION GUIDE

SUB FLOOR

Substrate Requirements

Requirements as follows:

Min. 25N|mm2 - Dust Free - Must be Level - Crack Free,
Moisture below 4%, in case moisture is higher than 4% a DPM must be used.

**Inadequate preparation will lead to loss of adhesion and failure*



PRIMER

Vand-Guard
200g-300g / M²

Sub-Base
250g-300g / M²

DPM Coat
250g / M²

Simple Application:

Use a flat squeegee to spread and relieve surface tension, then follow up with a back roll.

HANDY TIP
Make sure to cover walls and windows to avoid splattering and damaging surroundings.



THE BIG BASE COAT

Base Coat

500g-800g / M²

Simple Application:

Use a flat squeegee to spread and relieve surface tension, then follow up with a back roll.

HANDY TIP:
Utilize a base colour to complement your design. For instance, consider using black with full metallic pigments design.

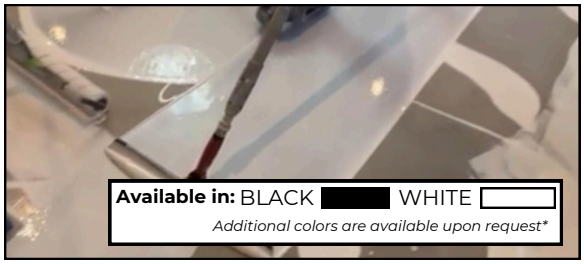

THE MONEY COAT

Design Coat

1Kg-1.5kg / M²

To apply:

Pour directly onto the floor and utilize your preferred tool to achieve the desired effects.

HANDY TIP:
Utilize a base colour to complement your design. For instance, consider using black with full metallic pigments design.

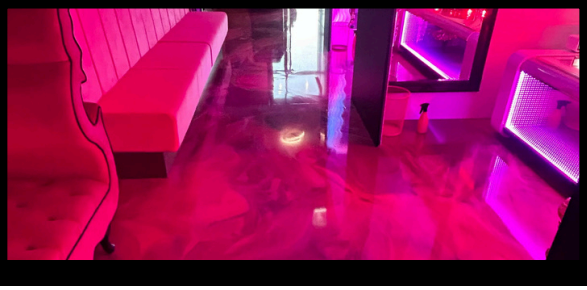

TOP COAT

G-2000
100g / M²

Application:

A spray-on with a pressure sprayer.

Handy Tip:
When applying, use circular motions.

Matte PU
250g-300g / M²

Application:

Apply with a lint-free roller.

Handy Tip:
When applying, try working in a grid pattern.





GAFFLOW RESIN SYSTEMS

12 Birch Rd, Birch Industrial Estate, Eastbourne, BN23 6PH

01323-

info@GafflowResinSystems.com

GafflowResinSystems.com