


Fionia 68 and 98




Fionia - 68

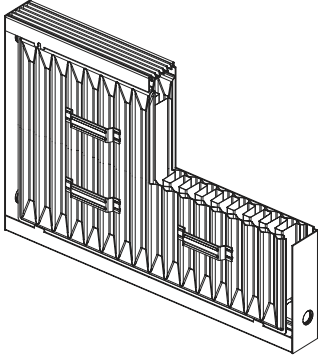

Fionia 68 cutaway to show waterways, rear view


Fionia - 98

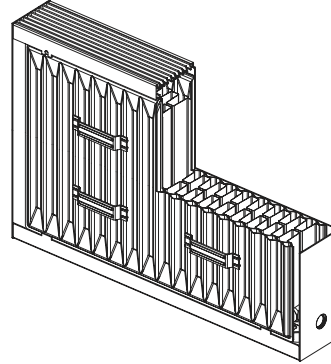


Fionia 98 cutaway to show waterways, rear view

Fionia - 68 and 98


Height and length

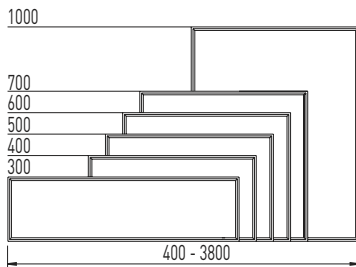

Fionia 68, profile




Fionia 98, profile



Fionia - 68 and 98 with built-in valve

Built-in valve format 3

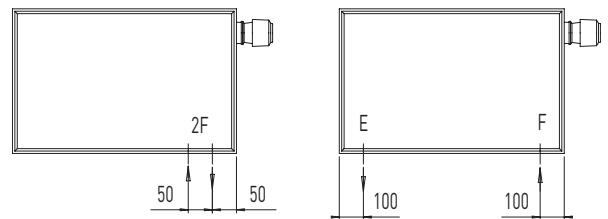

- Built-in valve format 3 can be delivered as follows:
- Downward facing tappings, 2E (left) or 2F (right)
- Downward facing tappings, EF

Length	Fionia 68 and 98: 400-3800 mm, in increments of 100 mm
Height	Fionia 68 and 98: 300, 400, 500, 600, 700 and 1000 mm
Depth	Fionia 68: 68 mm Fionia 98: 98 mm
Tappings	1/2" standard, adapter for 3/4"

Mounting	Wall or floor mounted Brackets are included Air vent is included
Colour	Powder coated in white RAL 9010 Option: Painted in other standard RAL and BS colours Top grille: Integrated white top grille as standard

Fionia 68 and 98



Output - Fionia 68


Fionia 68 Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	625	792	2.3	15.7
400	810	1028	3.0	21.1
500	990	1257	3.8	26.5
600	1166	1483	4.5	31.9
700	1340	1705	5.2	37.2
1000	1847	2358	7.6	52.8

Output - Fionia 98


Fionia 98 Height mm	Output		Water content litres/ metre	Weight kg/ metre
	W/metre 75°/65°/20°	W/metre 90°/70°/20°		
300	743	943	2.3	17.7
400	965	1228	3.0	24.1
500	1182	1504	3.8	30.6
600	1396	1779	4.5	37.1
700	1607	2048	5.2	43.4
1000	2224	2839	7.6	62.6

Build-in dimensions - Fionia 68 and 98


Fionia 68, profile

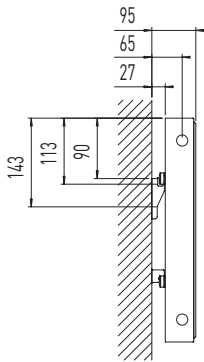


Fionia 98, profile

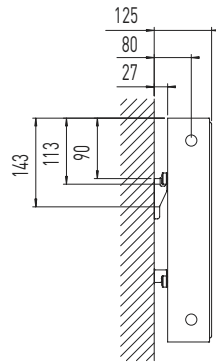

Tapping designation - Fionia 68 and 98

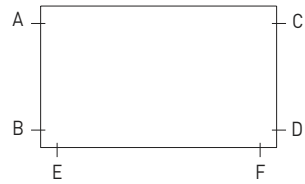


Tapping designation

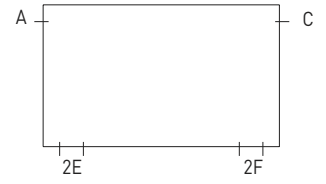


Tapping designation, 2E and 2F

Accessories - bracket

Bracket 30 mm




Adjustable spacer for bracket



Accessories - feet

Adjustable feet PR

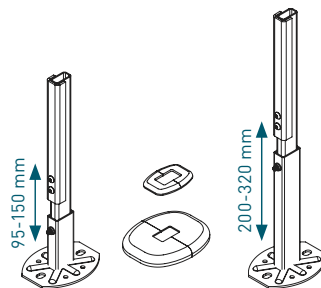

Console feet FH

