

ORWAK®

Environmental Services

Model 5040

Benefits

- Specially designed for PET bottles and aluminium cans
- Perforates the bottles before compaction
- Top Loading
- Multi Chamber




BALERS

Model 5040

- Specially designed for PET bottles and aluminium cans
- Perforates the bottles before compaction
- Top Loading
- Multi Chamber



A=2160 mm
B= 1148 mm
C=688 mm
D=1030 mm
E= 994 mm
F*=2260 mm
*transport height

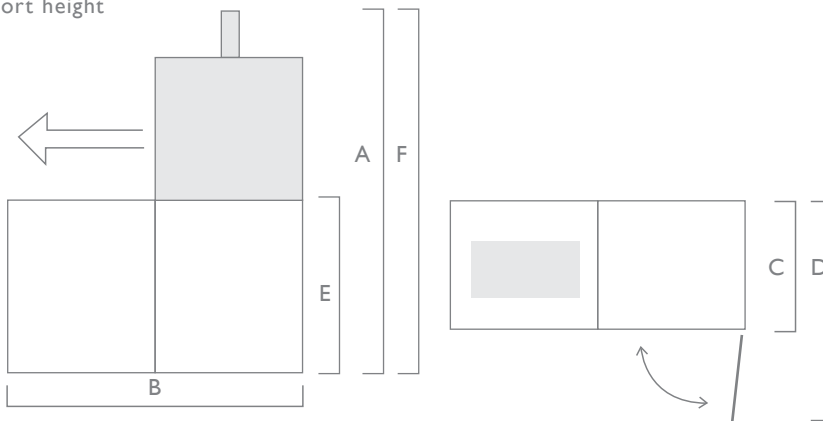

SPECIFICATIONS

CYCLE TIME

33 secs

WEIGHT

Total:	470 kg
Only double chamber:	224 kg
Only press unit:	226 kg

DIMENSIONS

(H) 2160 mm, (W) 1148 mm, (L) 688 mm

INSTALLATION DIMENSIONS

(H) 2260 mm, (W) 2350 mm, (L) 1030 mm

CHAMBER DIMENSIONS (INTERNAL)

(H) 793 mm, (W) 400 mm, (D) 400 mm

BALE SIZE

(H) 350-500 mm, (W) 400 mm, (D) 400 mm

BALE WEIGHT

PET/Aluminium 15-20kg

LOADING APERTURE

Width:	400 mm
Depth:	400 mm

PROTECTION CLASS

IP 55

OPERATING VOLTAGE

Single Phase	115 V, 60 Hz, 10 A or 230V, 50 Hz, 10 A
Via transformer:	24 AC/DC

PAINT

Two-part paint and powder coat with phosphating as base

OIL VOLUME/TYPE

4,9 IISO VG 32-68 SAE 10
from +5 °C and warmer

HYDRAULICAL DATA

Working pressure:	120 bar
Relief pressure:	135 bar
Press force:	6 ton, 60 kN
Piston stroke:	775 mm

NOISE LEVEL

< 70 dB (A)

a **phs** Group company

Tel: 0121 565 7426 Fax: 0121 565 7427
Email: orwaksales@phs.co.uk Website: www.orwak.co.uk
Orwak Environmental Services Ltd, Unit 6,
Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ

Printed on recycled paper